
2007 ENGINE Cooling System (MZI-3.5) - CX-9


2007 ENGINE


Cooling System (MZI-3.5) - CX-9


COOLING SYSTEM LOCATION INDEX [MZI-3.5]

2007 ENGINE Cooling System (MZI-3.5) - CX-9







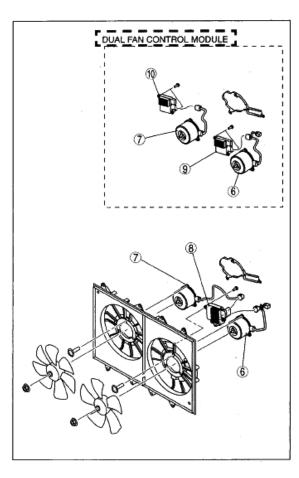

ac9uuw00002628

1	Cooling system cap (See COOLING SYSTEM CAP INSPECTION [MZI-3.5].)				
2	Coolant reserve tank (See ENGINE COOLANT LEVEL INSPECTION [MZI-3.5].) (See COOLANT RESERVE TANK REMOVAL/INSTALLATION [MZI-3.5].)				
3	Radiator (See ENGINE COOLANT PROTECTION INSPECTION [MZI-3.5].) (See ENGINE COOLANT REPLACEMENT [MZI-3.5].) (See ENGINE COOLANT LEAKAGE INSPECTION [MZI-3.5].) (See RADIATOR REMOVAL/ INSTALLATION [MZI-3.5].)				
4	Thermostat (See THERMOSTAT REMOVAL/ INSTALLATION [MZI-3.5].) (See THERMOSTAT INSPECTION [MZI-3.5].)				
5	Water pump				

(See

WATER PUMP REMOVAL/

6	Cooling fan motor No.1 (See FAN MOTOR REMOVAL/ INSTALLATION [MZI-3.5].) (See FAN MOTOR INSPECTION [MZI-3.5].)
7	Cooling fan motor No.2 (See FAN MOTOR REMOVAL/ INSTALLATION [MZI-3.5].) (See FAN MOTOR INSPECTION [MZI- 3.5].)
8	Fan control module (Single tan control module) (See FAN CONTROL MODULE INSPECTION [MZI-3.5].)
9	Fan control module No.1 (Dual fan control module) (See FAN CONTROL MODULE INSPECTION [MZI-3.5].)
10	Fan control module No.2 (Dual fan control module) (See FAN CONTROL MODULE INSPECTION [MZI-3.5].)

2007 ENGINE Cooling System (MZI-3.5) - CX-9

Fig. 1: Identifying Cooling System Components Courtesy of MAZDA MOTORS CORP.

COOLING SYSTEM SERVICE WARNINGS [MZI 3.5]

WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.
- Depending on the vehicle, the cooling fan may operate suddenly even when the ignition switch is turned off. Therefore, keep hands and tools away from the cooling fan even if the cooling fan is not operating to prevent injury to personnel or damage to the cooling fan. Always disconnect the negative battery cable when servicing the cooling fan or parts near the cooling fan.

ENGINE COOLANT LEVEL INSPECTION [MZI-3.5]

WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.

NOTE:

- If the "FL22" mark is shown on or near the cooling system cap, use FL22 type engine coolant.
- FL22 type engine coolant is shipped as a diluted solution. Use the solution as is when replacing coolant.


2007 ENGINE Cooling System (MZI-3.5) - CX-9



acxuuw00002056

Fig. 2: Identifying "Fl22" Mark On Cooling System Cap Courtesy of MAZDA MOTORS CORP.

- 1. Verify that the engine coolant level in the coolant reserve tank is between the F and L marks.
 - If the engine coolant level is below the L mark, add engine coolant.



ac9uuw00002193

Fig. 3: Identifying Engine Coolant Level In Coolant Reserve Tank Courtesy of MAZDA MOTORS CORP.

ENGINE COOLANT PROTECTION INSPECTION [MZI-3.5]

1. Measure the engine coolant temperature and specific gravity using a thermometer and a hydrometer.

CAUTION:

- Use engine coolant at a concentration that meets the environmental conditions in which the vehicle is driven, otherwise engine damage could occur.
- The engine has aluminum parts and must be protected by an ethylene-glycol-based coolant to prevent corrosion and freezing.
- Do not use coolants containing Alcohol, Methanol, Borate or Silicate. These coolants could damage the cooling system.
- Use only soft (demineralized) water in the coolant mixture.
 Water that contains minerals will cut down on the coolant's effectiveness.
- Engine coolant damages paint. If engine coolant does get on a

2007 ENGINE Cooling System (MZI-3.5) - CX-9

painted surface, rinse it off quickly.

NOTE:


- If the "FL22" mark is shown on or near the cooling system cap, use FL22 type engine coolant.
- FL22 type engine coolant is shipped as a diluted solution. Use the solution as is when replacing coolant.



acxuuw00002058

Fig. 4: Identifying "Fl22" Mark On Cooling System Cap Courtesy of MAZDA MOTORS CORP.

- 2. Determine the engine coolant protection level by referring to the graph shown in the figure.
 - If the engine coolant protection level is not correct, add water or engine coolant.



acxuuw00002059

Fig. 5: Engine Coolant Protection Level Graph Courtesy of MAZDA MOTORS CORP.

2007 ENGINE Cooling System (MZI-3.5) - CX-9

ENGINE COOLANT REPLACEMENT [MZI-3.5]

WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.

CAUTION:

- Use engine coolant at a concentration that meets the environmental conditions in which the vehicle is driven, otherwise engine damage could occur.
- The engine has aluminum parts and must be protected by an ethylene-glycol-based coolant to prevent corrosion and freezing.
- Do not use coolants containing Alcohol, Methanol, Borate or Silicate. These coolants could damage the cooling system.
- Use only soft (demineralized) water in the coolant mixture. Water that contains minerals will cut down on the coolant's effectiveness.
- Engine coolant damages paint. If engine coolant does get on a painted surface, rinse it off quickly.

NOTE:

- If the "FL22" mark is shown on or near the cooling system cap, use FL22 type engine coolant.
- FL22 type engine coolant is shipped as a diluted solution. Use the solution as is when replacing coolant.

Engine coolant capacity (approx. quantity)

Dual fan control module: 11.7 L {12.4 US qt, 10.3 Imp qt}

Single fan control module: 11.1 L {11.7 US qt, 9.77 Imp qt}


2007 ENGINE Cooling System (MZI-3.5) - CX-9



acxuuw00002061

Fig. 6: Identifying "Fl22" Mark On Cooling System Cap Courtesy of MAZDA MOTORS CORP.

1. Remove the cooling system cap.



ac9uuw00002194

Fig. 7: Identifying Cooling System Cap Courtesy of MAZDA MOTORS CORP.


- 2. Remove the radiator drain plug and drain the engine coolant into a container.
- 3. Flush the cooling system with water until all traces of color are gone.
- 4. Let the system drain completely.
- 5. Tighten the radiator drain plug.

Tightening torque

1.5-2.4 N.m {15-25 kgf.cm, 13-21 in.lbf}

6. Referring to the following chart, select the correct volume percentage of the water and engine coolant.

2007 ENGINE Cooling System (MZI-3.5) - CX-9



ac9uuw00002195

Fig. 8: Identifying Radiator Drain Plug Courtesy of MAZDA MOTORS CORP.

Antifreeze solution mixture percentage (Except FL22 type engine coolant)

ENGINE COOLANT PROTECTION CHART

Engine ecolont protection	Volume percentage (%) Water Coolant		C	
Engine coolant protection	Water	Coolant	Gravity at 20 C {00 1	
Above -16 °C {3 °F}	65	35	1.057	
Above -26 °C {-15 °F}	55	45	1.072	
Above -40 °C {-40 °F}	45	55	1.086	

- 7. Refill the engine coolant into the coolant reserve tank up to the F mark on the tank.
- 8. Install the cooling system cap.

CAUTION:

- If the water temperature gauge rises too high, stop the engine and decrease the engine coolant temperature to prevent overheating. Then, verify the malfunctioning part and repair or replace it.
- If the engine coolant level in the coolant reserve tank is below the L mark during engine coolant air bleeding operation, stop the engine, and after the engine coolant temperature decreases, add engine coolant. Then, resume the engine coolant air bleeding operation.
- 9. Start the engine and warm up the engine by idling.
- 10. After the engine warms up, perform the following steps. At this time, be careful of the engine coolant temperature to prevent overheating.

NOTE:

- If the accelerator pedal is depressed continuously for a specified time, the engine speed may decrease to the idle speed. This is does not indicate a malfunction.
- 1. Run the engine at approx. 4.000 rpm for 1 min.

2007 ENGINE Cooling System (MZI-3.5) - CX-9

- 2. Run the engine at idle for 1 min.
- 3. Repeat steps (1), (2) **approx. 2 times.**
- 4. Operate the heater at the maximum temperature and airflow, and verify that hot air blows from vent.
- 11. Stop the engine, and inspect the engine coolant level after the engine coolant temperature decreases. If it is low, repeat steps 7-10.
- 12. Inspect for engine coolant leakage. (See **ENGINE COOLANT LEAKAGE INSPECTION [MZI-3.5]**.)

ENGINE COOLANT LEAKAGE INSPECTION [MZI-3.5]

WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.
- 1. Inspect the engine coolant level. (See **ENGINE COOLANT LEVEL INSPECTION [MZI-3.5]**.)
- 2. Remove the cooling system cap.
- 3. Install the **SST** and a radiator cap tester to the coolant reserve tank filler port.
- 4. Apply pressure using the radiator cap tester.

CAUTION:

 Applying more than 122.6 kPa {1.25 kgf/cm², 17.8 psi} can damage the hoses, fittings, and other components, and cause leakage.

Engine coolant leakage inspection pressure 122.6 kPa {1.25 kgf/cm², 17.8 psi} [1 min]

5. When pressurizing the cooling system, verify that the pressure is maintained.

2007 ENGINE Cooling System (MZI-3.5) - CX-9



acxuuw00002060

Fig. 9: Installing SST To Radiator Cap Tester Courtesy of MAZDA MOTORS CORP.

• If the gauge needle drops, it may indicate water leakage. Repair or replace the applicable part.

COOLING SYSTEM CAP INSPECTION [MZI-3.5]


WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.
- 1. Clean the cooling system cap and the sealed part.
- 2. Inspect the cooling system cap for cracks or everted seal.
 - If there is any malfunction, replace the cooling system cap.
- 3. Attach the cooling system cap to the **SST** and a radiator cap tester.
- 4. Hold the cooling system cap downward and apply pressure gradually. Verify that the pressure is held stable for 10 s.
 - If the pressure is not held stable, replace the cooling system cap.

Cooling system cap valve opening pressure

93.2-122.6 kPa {0.95-1.25 kgf/cm², 13.5-17.8 psi}

2007 ENGINE Cooling System (MZI-3.5) - CX-9



agxuuw00002014

Fig. 10: Attaching Cooling System Cap To SST Courtesy of MAZDA MOTORS CORP.

COOLANT RESERVE TANK REMOVAL/INSTALLATION [MZI-3.5]

WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.
- 1. Drain the engine coolant until the coolant reserve tank becomes empty. (See **ENGINE COOLANT REPLACEMENT [MZI-3.5]**.)
- 2. Remove in the order indicated in the table.
- 3. Install in the reverse order of removal.
- 4. Refill the engine coolant. (See **ENGINE COOLANT REPLACEMENT [MZI-3.5]**.)
- 5. Inspect for engine coolant leakage. (See **ENGINE COOLANT LEAKAGE INSPECTION [MZI-3.5]**.)

2007 ENGINE Cooling System (MZI-3.5) - CX-9

1	Hose
2	Coolant reserve tank




Fig. 11: Identifying Coolant Reserve Tank And Hose With Torque Specifications Courtesy of MAZDA MOTORS CORP.

RADIATOR REMOVAL/INSTALLATION [MZI-3.5]

WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.
- 1. Disconnect the negative battery cable.
- 2. Drain the engine coolant. (See **ENGINE COOLANT REPLACEMENT [MZI-3.5]**.)
- 3. Remove the air cleaner and fresh air duct component. (see **INTAKE-AIR SYSTEM REMOVAL/INSTALLATION [MZI-3.5]**.)
- 4. Remove the cooling fan component. (See <u>FAN MOTOR REMOVAL/INSTALLATION [MZI-3.5]</u>.)
- 5. Disconnect the ATF oil cooler hose from the radiator.
- 6. Remove in the order indicated in the table.
- 7. Install in the reverse order of the removal.
- 8. Refill the engine coolant. (See **ENGINE COOLANT REPLACEMENT [MZI-3.5]**.)
- 9. Inspect for engine coolant leakage. (See **ENGINE COOLANT LEAKAGE INSPECTION [MZI-3.5]**.)
- 10. Inspect the ATF level. (see <u>AUTOMATIC TRANSAXLE FLUID (ATF) INSPECTION [AW6A-EL, AW6AX-EL]</u>.)

2007 ENGINE Cooling System (MZI-3.5) - CX-9

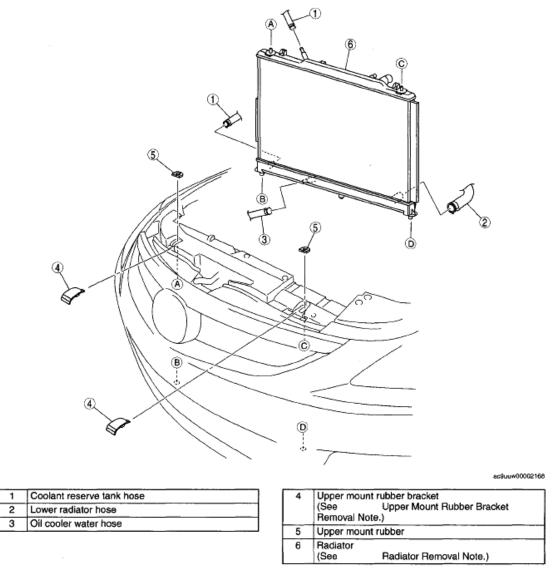



Fig. 12: Identifying Radiator Components Courtesy of MAZDA MOTORS CORP.

UPPER MOUNT RUBBER BRACKET REMOVAL NOTE

CAUTION:

- Do not apply force excessively and in the directions that are not specified, otherwise the upper mount rubber bracket could be damaged.
- 1. Insert a flathead screwdriver into the upper mount rubber bracket notch.

2007 ENGINE Cooling System (MZI-3.5) - CX-9



<u>Fig. 13: Inserting Flathead Screwdriver Into Upper Mount Rubber Bracket Notch</u> Courtesy of MAZDA MOTORS CORP.

2. Apply force in the direction shown by the arrow.




Fig. 14: Applying Downward Force Courtesy of MAZDA MOTORS CORP.

RADIATOR REMOVAL NOTE

1. Remove the radiator from above the engine compartment.

THERMOSTAT REMOVAL/INSTALLATION [MZI-3.5]

WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.

2007 ENGINE Cooling System (MZI-3.5) - CX-9

- 1. Disconnect the negative battery cable.
- 2. Drain the engine coolant. (See **ENGINE COOLANT REPLACEMENT [MZI-3.5]**.)
- 3. Remove the air cleaner and fresh air duct component. (see **INTAKE-AIR SYSTEM REMOVAL/INSTALLATION** [MZI-3.5] .)
- 4. Remove in the order indicated in the table.
- 5. Install in the reverse order of removal.
- 6. Refill the engine coolant. (See **ENGINE COOLANT REPLACEMENT [MZI-3.5]**.)
- 7. Inspect for engine coolant leakage. (See **ENGINE COOLANT LEAKAGE INSPECTION [MZI-3.5]**.)

1	Thermostat of	cover	1 ,
2	O-ring (See	O-ring Installation Note.)	
3	Thermostat (See	Thermostat Installation Note.)	1 8.5-11. (87-11)
			3
			N-m {kgf-cm, in-lbf}

Fig. 15: Identifying Thermostat Cover And Thermostat With Torque Specifications Courtesy of MAZDA MOTORS CORP.

THERMOSTAT INSTALLATION NOTE

1. Install the thermostat into the thermostat case with the jiggle pin at the top.




Fig. 16: Identifying Jiggle Pin Courtesy of MAZDA MOTORS CORP.

O-RING INSTALLATION NOTE

1. Clean and inspect the O-ring.

2007 ENGINE Cooling System (MZI-3.5) - CX-9

- o Install a new O-ring if necessary.
- 2. Apply clean engine coolant to the O-ring.
- 3. Install the O-ring.

THERMOSTAT INSPECTION [MZI-3.5]

1. Inspect the thermostat for the following.

WARNING:

- During inspection, the thermostat and water are extremely hot and can cause severe burns. Do not touch the thermostat and water.
- The valve should not open under normal temperature.
- Opening temperature and valve lift
 - If there is a malfunction, replace the thermostat.

Thermostat initial-opening temperature

```
79.5-83.3 °C {175.2-181.9 °F}
```

Thermostat full-open temperature

94.5 °C {202.1 °F}

Thermostat full-open lift

More than 8.1 mm {0.32 in}

WATER PUMP REMOVAL/INSTALLATION [MZI-3.5]

WARNING:


- Fuel vapor is hazardous. It can very easily ignite, causing serious injury and damage. Always keep sparks and flames away from fuel.
- Fuel line spills and leakage are dangerous. Fuel can ignite and cause serious injures or death and damage. Fuel can also irritate skin and eyes. To prevent this, always complete the "Fuel Line Safety Procedure". (see BEFORE REPAIR PROCEDURE [MZI-3.5].)
- Continuous exposure to USED engine oil has caused skin cancer in laboratory mice. Protect your skin by washing with soap and water immediately after working with engine oil.

NOTE:

• The following procedure "WATER PUMP REMOVAL/INSTALLATION" is performed after the engine and transaxle component is removed from the vehicle.

2007 ENGINE Cooling System (MZI-3.5) - CX-9

- 1. Drain the engine oil. (see **ENGINE OIL REPLACEMENT [MZI-3.5]**.)
- 2. Remove the engine and transaxle component. (see **ENGINE REMOVAL/INSTALLATION [MZI-3.5]**.)
- 3. Secure the engine and transaxle component using a hoist and the SST.
- 4. Remove the dynamic chamber and throttle body as a single unit. (see **INTAKE-AIR SYSTEM REMOVAL/INSTALLATION** [MZI-3.5] .)
- 5. Remove the ignition coils. (see **IGNITION COIL REMOVAL/INSTALLATION [MZI-3.5]** .)
- 6. Remove the dipstick.
- 7. Remove the power steering oil pump drive belt. (see <u>DRIVE BELT REMOVAL/INSTALLATION</u> [MZI-3.5] .)
- 8. Remove the power steering oil pump. (see **POWER STEERING OIL PUMP REMOVAL/INSTALLATION**.)
- 9. Remove the timing chain component. (see <u>TIMING CHAIN REMOVAL/INSTALLATION [MZI-3.5]</u>.)
- 10. Remove in the order indicated in the table.
- 11. Install in the reverse order of removal.
- 12. Start the engine and:
 - 1. Inspect the runout and contact on the pulley and belt.
 - 2. Inspect for engine oil, engine coolant, ATF, power steering fluid and fuel leakage.
 - 3. Verify the ignition timing, idle speed and idle mixture. (see **ENGINE TUNE-UP [MZI-3.5]**.)
 - 4. Engine accessories operation.
- 13. Perform a road test.



ac9uuw00001882

Fig. 17: Securing The Engine And Transaxle Component Using Special Tool

2007 ENGINE Cooling System (MZI-3.5) - CX-9

Courtesy of MAZDA MOTORS CORP.


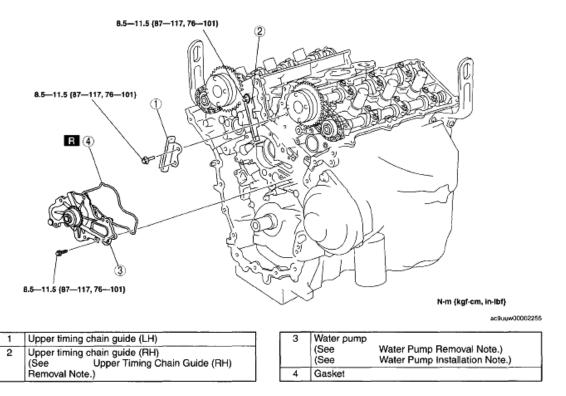


Fig. 18: Identifying Water Pump Components With Torque Specifications Courtesy of MAZDA MOTORS CORP.

UPPER TIMING CHAIN GUIDE (RH) REMOVAL NOTE

- 1. Loosen the upper timing chain guide (RH) bolt A.
- 2. Remove the upper timing chain guide (RH) bolt B.



ac9uuw00002197

<u>Fig. 19: Identifying Upper Timing Chain Guide Bolts</u> Courtesy of MAZDA MOTORS CORP.

- 3. Move the upper timing chain guide (RH) as shown.
- 4. Retighten the holt A.

2007 ENGINE Cooling System (MZI-3.5) - CX-9




Fig. 20: Identifying Upper Timing Chain Guide Bolt Courtesy of MAZDA MOTORS CORP.

WATER PUMP REMOVAL NOTE

NOTE:

- When the water pump is removed, the engine coolant may flow through the cylinder block and penetrate the oil pan. To prevent the engine coolant from accumulating in the oil pan, remove the oil pan drain plug before removing the water pump.
- 1. Remove the oil pan drain plug.
- 2. To prevent engine coolant from penetrating the oil pan, line the cylinder block with plastic sheeting as shown in the figure before removing the water pump.




Fig. 21: View Of Water Pump And Plastic Sheeting Courtesy of MAZDA MOTORS CORP.


WATER PUMP INSTALLATION NOTE

1. Tighten the water pump bolts in the order shown in the figure.

Tightening torque

8.5-11.5 N.m {87-117 kgf.cm, 76-101 in.lbf}

2007 ENGINE Cooling System (MZI-3.5) - CX-9




<u>Fig. 22: Identifying Water Pump Bolts Tightening Sequence</u> Courtesy of MAZDA MOTORS CORP.

FAN MOTOR REMOVAL/INSTALLATION [MZI-3.5]

WARNING:

- Never remove the cooling system cap or loosen the radiator drain plug while the engine is running, or when the engine and radiator are hot. Scalding engine coolant and steam may shoot out and cause serious injury. It may also damage the engine and cooling system.
- Turn off the engine and wait until it is cool. Even then, be very careful when removing the cap. Wrap a thick cloth around it and slowly turn it counterclockwise to the first stop. Step back while the pressure escapes.
- When you are sure all the pressure is gone, press down on the cap using the cloth, turn it, and remove it.
- 1. Disconnect the negative battery cable.
- 2. Drain the engine coolant. (See **ENGINE COOLANT REPLACEMENT [MZI-3.5]**.)
- 3. Remove the air cleaner and fresh air duct component. (see **INTAKE-AIR SYSTEM REMOVAL/INSTALLATION [MZI-3.5]**.)
- 4. Remove the engine cover.
- 5. Remove the dipstick.
- 6. Remove in the order indicated in the table.
- 7. Install in the reverse order of removal.
- 8. Refill the engine coolant. (See **ENGINE COOLANT REPLACEMENT [MZI-3.5]**.)
- 9. Inspect for engine coolant leakage. (See **ENGINE COOLANT LEAKAGE INSPECTION [MZI-3.5]**.)

2007 ENGINE Cooling System (MZI-3.5) - CX-9

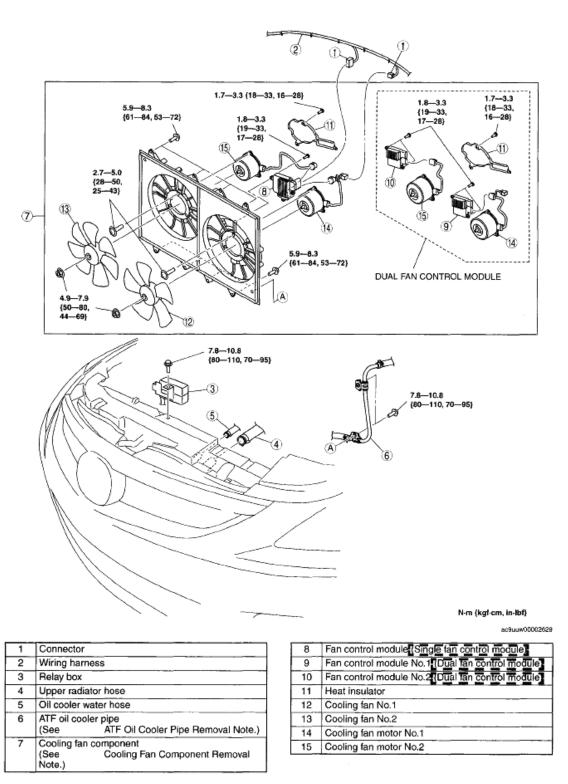

<u>Fig. 23: Identifying Fan Motor Components With Torque Specifications</u> Courtesy of MAZDA MOTORS CORP.

ATF OIL COOLER PIPE REMOVAL NOTE

2007 ENGINE Cooling System (MZI-3.5) - CX-9

1. Remove the ATF oil cooler pipe with the hoses still connected. Position the ATF oil cooler pipe so that it is out of the way.

COOLING FAN COMPONENT REMOVAL NOTE

1. Remove the cooling fan component from above the engine compartment.

FAN MOTOR INSPECTION [MZI-3.5]

PART INSPECTION


- 1. Verify that the battery is fully charged. (see **BATTERY INSPECTION [MZI-3.5]**.)
- 2. Disconnect the cooling fan motor connector (fan control module side, 2 terminals).
- 3. Install a tester and battery to the cooling fan motor connector as shown in the figure.
- 4. Verify that each fan motors operate smoothly at the standard current.
 - If there is any malfunction, replace the applicable part.

Cooling fan motor standard current [Single Fan Control Module]

No.1, No.2: 11.2-15.2 A

Cooling fan motor standard current [Dual Fan Control Module]

No.1, No.2:17-23 A




acxuuw00002065

Fig. 24: Installing Tester And Battery To Cooling Fan Motor Connector (2 Terminals) Courtesy of MAZDA MOTORS CORP.

FAN CONTROL MODULE INSPECTION [MZI-3.5]

2007 ENGINE Cooling System (MZI-3.5) - CX-9

- 1. Connect the M-MDS to the DLC-2.
- 2. Start and warm up the engine.
- 3. Monitor the engine coolant temperature with the M-MDS.



ac9uuw00002177

Fig. 25: Identifying DLC-2 Connector Courtesy of MAZDA MOTORS CORP.

- 4. Measure the voltage at terminal A of the fan control module connector (2 terminal) as shown in the table.
 - If not within the specification, inspect the input signals from the following parts.
 - Cylinder Head Temperature (CHT) sensor
 - Refrigerant pressure switch (middle)

FAN CONTROL MODULE CONNECTOR





ac9uuw00002178

<u>Fig. 26: Identifying Fan Control Module Connector Terminals</u> Courtesy of MAZDA MOTORS CORP.

Single fan control module

SINGLE FAN CONTROL MODULE SPECIFICATION

Inspection			Result	
Condition	A/C	Engine coolant temp.	Result	
IG SW ON or idling	OFF	Less than 96 °C {205 °F}	0 V (Fan stops.)	
Idling	OFF	96-106 °C {205-223 °F}	4.11-10.29 V	
Idling	ON ⁽⁾	96-106 °C {205-223 °F}	Approx. 6.4 V	
Idling	ON ⁽⁾	96-106 °C {205-223 °F}	Approx. 7.7 V	

2007 ENGINE Cooling System (MZI-3.5) - CX-9

Idling OFF More than 106 °C {223 °F} B+

Dual fan control module

DUAL FAN CONTROL MODULE SPECIFICATION

Inspection			Result	
Condition	A/C Engine coolant temp.		Kesuit	
IG SW ON or idling	OFF	Less than 96 °C {205 °F}	0 V (Fan stops.)	
Idling	OFF	96-106 °C {205-223 °F}	4.11-10.29 V	
Idling	$ON^{(2)}$	96-106 °C {205-223 °F}	Approx. 6.6 V	
Idling	ON ⁽²⁾	96-106 °C {205-223 °F}	Approx. 7.5 V	
Idling	OFF	More than 106 °C {223 °F}	B+	
(1) Refrigerant pressure switch (middle) is off.				
(2) Refrigerant pressure switch (middle) is on.				

5. If all the above parts are normal, replace the fan control module.