

D

Е

G

Н

L

M

# **CONTENTS**

PREPARATION	2
Special Service Tool	
Commercial Service Tools	
EXHAUST SYSTEM	3

Snecking Exnaust System	3
Removal and Installation	3
REMOVAL	4
INSTALLATION	4
INSPECTION AFTER INSTALLATION	4

## **PREPARATION**

## PREPARATION PFP:00002

# **Special Service Tool**

EBS00LL8

The actual shapes of Kent-Moore tools may differ from those of special service tools illustrated here.			
Tool number (Kent-Moore No.) Tool name		Description	
KV10114400 (J-38365) Heated oxygen sensor wrench	S-NT636	Loosening or tightening heated oxygen sensors: a: 22 mm (0.87 in)	

## **Commercial Service Tools**

EBS00LL9

(Kent-Moore No.) Tool name		Description
(J-43897-18) (J-43897-12) Oxygen sensor thread cleaner	a Mating surface shave cylinder	Reconditioning the exhaust system threads before installing a new heated oxygen sensor (Use with anti-seize lubricant shown below): a: J-43897-18 (18 mm, 0.71 in) dia. for zirconia oxygen sensor b: J-43897-12 (12 mm, 0.47 in) dia. for titania oxygen sensor
Anti-seize lubricant (Permatex 133AR or equivalent meeting MIL specification MIL-A-907)	AEM489	Lubricating oxygen sensor thread cleaning tool when reconditioning exhaust system threads
Power tool	PBICO 190E	Loosening nuts and bolts

### **EXHAUST SYSTEM**

#### **EXHAUST SYSTEM**

#### PFP:20100

## **Checking Exhaust System**

EBS00LLA

ΕX

Е


Н

M

WBIA0839E


Check exhaust pipes, muffler and mounting for improper attachment, leaks, cracks, damage or deterioration.

If anything is found, repair or replace damaged parts.

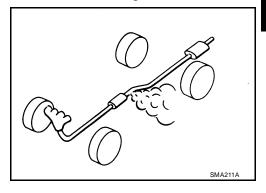

## **Removal and Installation**

EBS00LLB

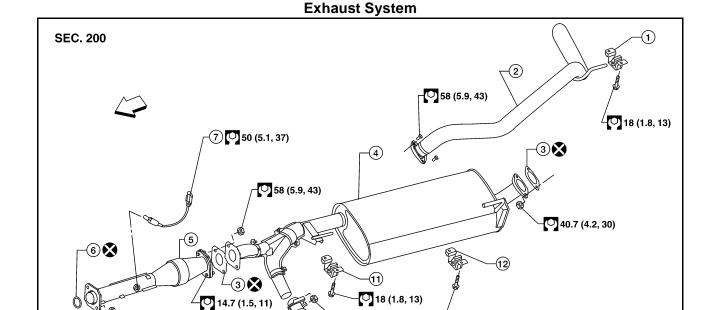

45 (4.6, 33)

58 (5.9, 43)

- 1. Tailpipe hanger bracket
- 4. Main muffler
- 7. Heated oxygen sensor 2 (bank 2)

52.5 (5.3, 39)

- 10. Center exhaust tube
- ← Vehicle front

2. Tailpipe

<del>(</del>8 **)** 50 (5.1, 37)

52.5 (5.3, 39)

5. Right front exhaust tube

③※

14.7 (1.5, 11)

- 8. Heated oxygen sensor 2 (bank 1)
- 11. Muffler hanger bracket front
- 3. Gasket

18 (1.8, 13)

- 6. Ring gasket
- 9. Left front exhaust tube
- 12. Muffler hanger bracket rear

#### **CAUTION:**

- Be sure to use genuine exhaust system parts or equivalents which are specially designed for heat resistance, corrosion resistance, and shape.
- Perform the operation with the exhaust system fully cooled. The system will be hot just after the engine stops.
- Be careful not to cut your hand on the heat insulator edge.

Revision: July 2007 EX-3 2006 Armada

#### **EXHAUST SYSTEM**

#### **REMOVAL**

Remove exhaust system components using power tool.

### **INSTALLATION**

Installation is in the reverse order of removal.

#### **CAUTION:**

- Always replace exhaust gaskets with new ones when reassembling.
- Before installing a new heated oxygen sensor, clean and lube the exhaust tube threads using Tool.

#### **Tool number**

A : — (J-43897-18) B : — (J-43897-12)

- Discard any heated oxygen sensor which has been dropped from a height of more than 0.5 m (19.7 in) onto a hard surface such as a concrete floor; replace with a new one.
- Do not over-torque the heated oxygen sensor. Doing so may damage the heated oxygen sensor, resulting in the MIL coming on.
- If any mounting insulator is badly deformed, repair or replace it. If deposits such as mud pile up on the mounting insulators, clean and inspect them.
- Temporarily tighten the nuts on the exhaust manifold side and the bolts on the vehicle side. Check each part for interference with other components, and then tighten the nuts and bolts to specification.

#### INSPECTION AFTER INSTALLATION

- With the engine running, check exhaust tube joints for gas leakage and unusual noises.
- Check to ensure that mounting brackets and mounting rubbers are installed properly and free from undue stress. Improper installation could result in excessive noise and vibration.