


MOTUL 665 CODEX

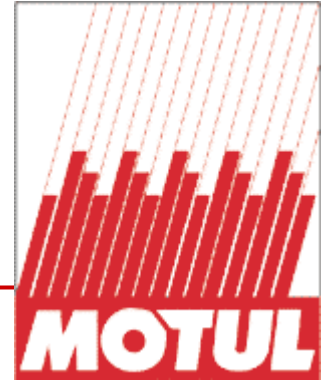

Food Industry Grease

NLGI 2

TYPE OF USE

Greasing of machines used for the processing and packaging of food products : milk, wine, beer, fruit juice, mineral water, sweets, meat, tinned food...
Greasing of bearings, slide-rails, reduction gears, links and rollers of production lines and transmission.

Temperature for use : -20°C / -4°F to +140°C / +284°F

PERFORMANCE

Grease formulated with complex aluminium soap and with white medicinal oils
USDA H1 approved (United States Department of Agriculture).

No flavour, no smell.

Very good oxidation stability.

Good protection against corrosion.

Adherent.

Designation DIN : KF 2 N-20

PROPERTIES

Colour	Visual	Translucent
Consistency grade	DIN 51 818	NLGI 2
Soap		Complex Aluminium
Penetrability - 60 cycles	ASTM D217	265 / 295 x10 ⁻¹ mm
Drop point	ASTM D 2265	> 250°C / > 482°F

Anti-corrosion EMCOR IP 2200 / 1

FAG FE-9 Test

DIN 51 821

F50>240h at 120°C