


MOTUL DOT 5.1 BRAKE FLUID

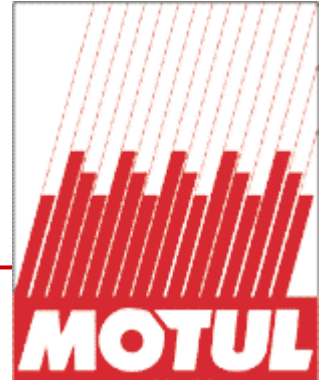

**Long life 100% synthetic fluid
for hydraulic actuated-brake and clutch systems
DOT 5.1 NON-SILICONE BASE**

TYPE OF USE

**All types of hydraulic actuated-brake and clutch systems
in accordance with DOT 5.1, DOT 4 and DOT 3 manufacturers' recommendations.**
Fluidity specially designed for anti-locking brake system (ABS).

PERFORMANCE

STANDARDS : FMVSS 116 DOT 5.1 NON SILICONE BASE & DOT 4 & DOT 3
SAE J 1703

Long life fluid :

The high wet boiling point (185°C / 365°F), superior to DOT 4 (155°C / 311°F mini) and DOT 3 (140°C / 284°F mini) fluids enables to use this product longer. Indeed, DOT 3 / DOT 4 and DOT 5.1 brake fluids have the property to absorb humidity contained in the air, which reduces their boiling points and consequently security.

The wet boiling point is representative of the fluid after one year of use.

Specially designed to anti-locking brake systems (ABS) :

The viscosity (820 centipoises at -40°C / -40°F) lower than DOT 4 (up to 1800 cp) and DOT 3 (up to 1500 cp) brake fluids, allows an easier fluid circulation in micro-valves of anti-locking systems.

Perfectly neutral with seals used in braking systems. Anti-corrosion.

RECOMMENDATIONS

Mixable with DOT 3, DOT 4 and DOT 5.1 NON SILICONE BASE products.

Do not mix with silicone (DOT 5 silicone base) or mineral base fluids (LHM).

Store brake fluid in its original container, tightly closed to prevent absorption of moisture.

Aggressive chemical product if contact with hands, paint or varnish.

If skin contact, rinse thoroughly with water.

Drain interval : 12 to 24 months as per manufacturers' recommendations.

PROPERTIES

100% synthetic fluid, polyglycol bases.

Yellow colour.

Dry boiling point 270 °C / 518 °F

Wet boiling point 185 °C / 365 °F

Viscosity at -40°C (-40°F) 820 mm²/s

Viscosity at 100°C (212°F) 2.1 mm²/s