


MOTUL GC GREASE

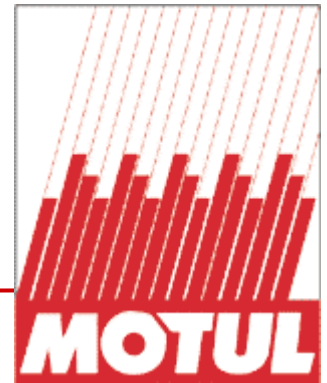

Soft grease for central lubrication

Lithium

NLGI 00 – Extreme-pressure

TYPE OF USE

Grease specially formulated for central lubrication installed on trucks, civil engineering machinery and agriculture.

Temperature for use : -50°C / -58°F to +120°C / +248°F

PERFORMANCE

Soft grease formulated with lithium soap, mineral base oil stocks and extreme-pressure, anti-rust & anti-oxidation additivation.

Complies with WILLY VOGEL requirements.

Good properties under heavy loads.

Very good circulation of the grease in the pipes, at cold temperature.

Resistant to water

Anti-corrosion.

Anti-rust.

Anti-oxidation.

Excellent anti-wear properties.

Designation DIN 51 502: MP 00/000 K-50

PROPERTIES

Colour	Visual	Red
Consistency grade	DIN 51 818	NLGI 00/000
Soap		Lithium
Penetrability - 60 cycles	ASTM D217	400 / 460 x10 ⁻¹ mm
Drop point	ASTM D 2265	160°C / 320°F

Anti-corrosion EMCOR IP 2200 / 0

4 ball test	ASTM D 2596	2200 N
-------------	-------------	--------

We retain the right to modify the general characteristics of our products in order to offer to our customers the latest technical development

Product specifications are definitive from the order which is subject to our general conditions of sale and warranty. Made in FRANCE

MOTUL - 119 Bd Félix Faure - 93303 AUBERVILLIERS CEDEX - BP 94 - France - Tel 33 1 48 11 70 00 - FAX 33 1 48 33 28 - Web site : www.motul.com

8045

06/00