


MOTUL GREASE 100

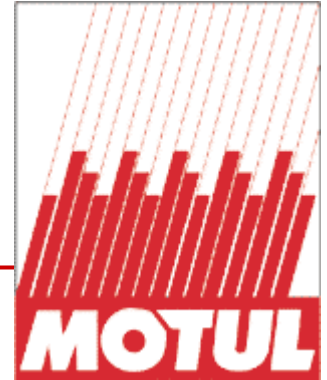

All purpose Grease

Lithium

NLGI 2

TYPE OF USE

Grease for roller bearings under normal duty conditions, articulations, bearings, hubs, ball joint, cables...

Car, Motorbike, Marine, Transport, Civil engineering machinery, industry and farm machines...

For more severe applications such as heavy loads, resistance to water, we recommend to use well-adapted products like TECH GREASE 300, TP/AGRI or MOLYBDEN.

Temperature for use : -30°C / -22°F to +120°C / +248°F

PERFORMANCE

Grease with lithium soap and anti-wear, anti-oxidation & anti-corrosion additivation.

Good mechanical stability.

Adequate pumpability at cold temperature.

Anti-corrosion and anti-rust protection

Adherent.

Designation DIN 51 502 : KP 2 K-30

PROPERTIES

Colour	Visual	Blue
Consistency grade	DIN 51 818	NLGI 2
Soap		Lithium
Penetrability - 60 cycles	ASTM D217	265 / 295 x10 ⁻¹ mm
Drop point	ASTM D 2265	180°C / 356°F

Anti-corrosion EMCOR IP 2200 / 0

FAG FE-9 Test

DIN 51 821

F50>100h at 120°C