


# MOTUL ROULEMENT PL

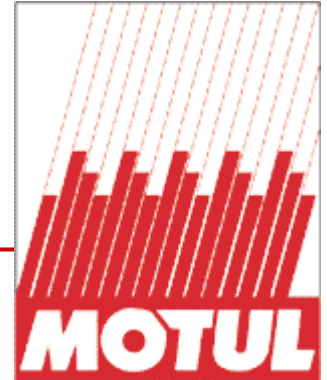

**Solid grease for truck wheel hub**

**Lithium**

**NLGI 3 - Extreme-pressure**

## TYPE OF USE

NLGI 3 consistency grease specially recommended for the greasing of truck wheel hubs. This product can also be used for other applications, in the industry for example.

Temperature for use : -20°C / -4°F to +130°C / +266°F

## PERFORMANCE

Grease formulated with mineral base oil stocks, with lithium soap and with extreme-pressure, anti-wear & anti-oxidation additivation. Its very complete additivation allows to resist to extreme pressures, to stick very strongly on surfaces and to keep all its properties on a very long period. Anti-corrosion. Anti-rust. Anti-oxidation.

Designation DIN 51 502: KP 3 K-20

## PROPERTIES

Colour	Visual	Light Brown
Consistency grade	DIN 51 818	NLGI 3
Soap		Lithium
Penetrability - 60 cycles	ASTM D217	220 / 250 x10 <sup>-1</sup> mm
Drop point	ASTM D 2265	190°C / 374°F

### **Anti-corrosion EMCOR IP 2200 / 0**

TIMKEN Test - load	ASTM D 2509	45 lb
FAG FE-9 Test	DIN 51 821	F50>100h at 130°C

We retain the right to modify the general characteristics of our products in order to offer to our customers the latest technical development

Product specifications are definitive from the order which is subject to our general conditions of sale and warranty. Made in FRANCE

MOTUL - 119 Bd Félix Faure - 93303 AUBERVILLIERS CEDEX - BP 94 - France - Tel 33 1 48 11 70 00 - FAX 33 1 48 33 28 - Web site : [www.motul.com](http://www.motul.com)

8039

06/00