551C1–01

OVERHAUL


NOTICE:

When disassembling the integration control & panel assy, touch the vehicle body to eliminate the static electricity to prevent parts from being damaged.

HINT:


- Installation is in the reverse order of removal.
- COMPONENTS for integration control & panel assy: See page 55–15.

1. **REMOVE INSTRUMENT CLUSTER FINISH PANEL SUB–ASSY CENTER (SEE PAGE 71–9)**
2. **REMOVE INTEGRATION CONTROL & PANEL ASSY (SEE PAGE 67–5)**
3. **REMOVE RADIO RECEIVER ASSY (SEE PAGE 67–5)**

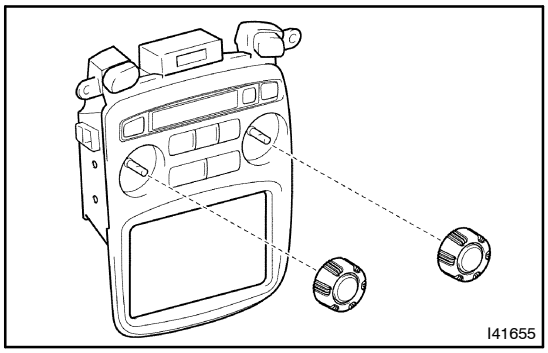


4. REMOVE CONTROL KNOB SUB–ASSY

(a) Remove the 2 control knob sub–assy.

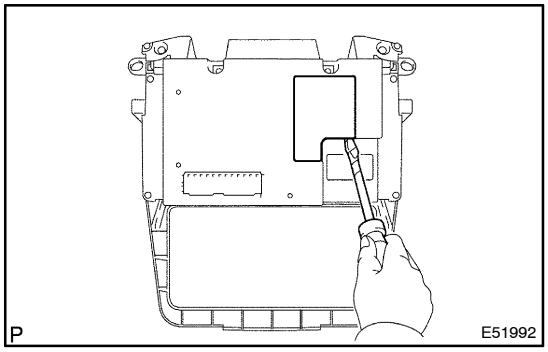

5. REMOVE HEATER CONTROL NAME SHEET NO.2


(a) Using a screwdriver with protected by taping, remove the heater control name sheet No. 2.

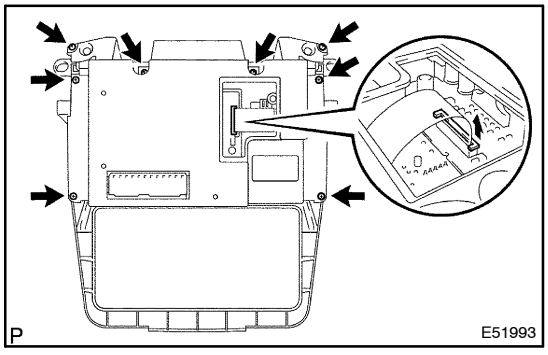

6. REMOVE HEATER CONTROL HOUSING SUB–ASSY


(a) Release the lock of connector and disconnect the cable.

(b) Remove the 8 screws and heater control housing sub–assy.

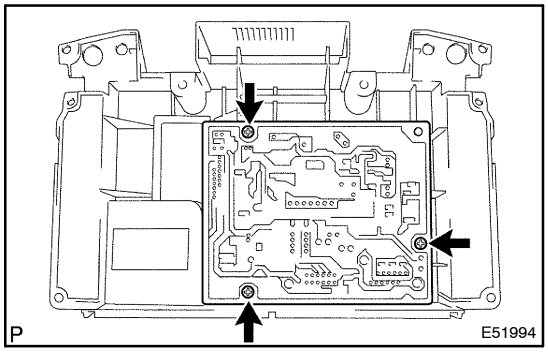

7. REMOVE AIRCONDITIONER AMPLIFIER ASSY

(a) Remove the 3 screws and air conditioner amplifier assy from the heater control retainer.

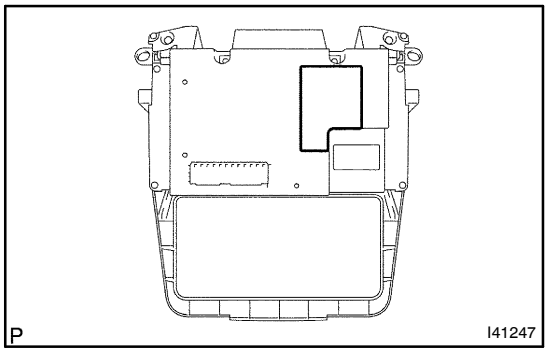

8. INSTALL HEATER CONTROL NAME SHEET NO.2

(a) Install the new heater control name sheet No. 2.