


MOTUL SELLETTE

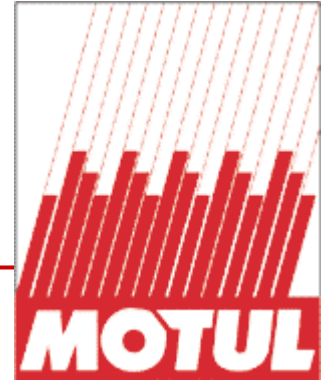

Grease for semi-trailer fifth wheels

Anti-seizing

NLGI 2 - Graphite

TYPE OF USE

Grease specially formulated for the lubricating of semi-trailer fifth wheels.
Can be also used for the greasing of cables, open gears, ring gears, gear-racks and ball joints for civil engineering machinery.

Temperature for use : -30°C / -22°F to +140°C / +284°F

PERFORMANCE

Extreme-pressure grease, adhesive, with a lithium soap and reinforced with graphite.
Very sticky.
Very good resistance to water.
Anti-corrosion, anti-rust protection.

Designation DIN 51 502: KPF 2 N-30

PROPERTIES

Colour	Visual	Black
Consistency grade	DIN 51 818	NLGI 2
Soap		Lithium
Penetrability - 60 cycles	ASTM D217	265 / 295 x10 ⁻¹ mm
Drop point	ASTM D 2265	190°C / 374°F

Anti-corrosion EMCOR IP 2200 / 0

4 ball test	ASTM D 2596	3200 N
-------------	-------------	--------

We retain the right to modify the general characteristics of our products in order to offer to our customers the latest technical development

Product specifications are definitive from the order which is subject to our general conditions of sale and warranty. Made in FRANCE

MOTUL - 119 Bd Félix Faure - 93303 AUBERVILLIERS CEDEX - BP 94 - France - Tel 33 1 48 11 70 00 - FAX 33 1 48 33 28 - Web site : www.motul.com

8044

06/00