


MOTUL SOFT GREASE 0

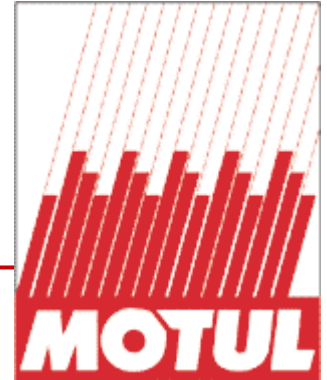

Soft grease for gear cases

Lithium

NLGI 0 – Extreme-pressure

TYPE OF USE

Soft grease for lubrication of reduction gears or central lubrication systems, depending on manufacturers recommendation.

Civil engineering machinery, Agriculture, Industry.

Temperature for use : -40°C / -40°F to +120°C / +248°F

PERFORMANCE

High quality soft grease formulated with lithium soap, mineral base oil stocks and extreme-pressure, anti-wear, anti-corrosion & anti-oxidation additivation.

Provides an efficient greasing of gears : no risk of dry starts as the grease , centrifuged on the cases, falls down on the gears, because of its soft consistency.

Good anti-rust & anti-corrosion protection.

Excellent pumpability at cold temperatures.

Very high performance under heavy load

Designation DIN 51 502: GP 0 K-40

PROPERTIES

Colour	Visual	dark brown
Consistency grade	DIN 51 818	NLGI 0
Soap		Lithium
Penetrability - 60 cycles	ASTM D217	355 / 385 x10 ⁻¹ mm
Drop point	ASTM D 2265	180°C / 356°F

Anti-corrosion EMCOR IP 2200 / 0

4 ball test	ASTM D 2596	2600 N
-------------	-------------	--------

We retain the right to modify the general characteristics of our products in order to offer to our customers the latest technical development

Product specifications are definitive from the order which is subject to our general conditions of sale and warranty. Made in FRANCE

MOTUL - 119 Bd Félix Faure - 93303 AUBERVILLIERS CEDEX - BP 94 – France - Tel 33 1 48 11 70 00 - FAX 33 1 48 33 28 – Web site : www.motul.com

8040

06/00