


A/C Cut Control Circuit

CIRCUIT DESCRIPTION

This circuit cuts air conditioning operation during vehicle acceleration in order to increase acceleration performance. During acceleration with the vehicle speed at 30 km/h (19 mph) or less and accelerator pedal opening angle at 45° or more, the A/C magnetic switch is turned OFF for several seconds.

The air conditioning is also controlled by the ECU outputting the engine coolant temperature to the A/C amplifier.

WIRING DIAGRAM

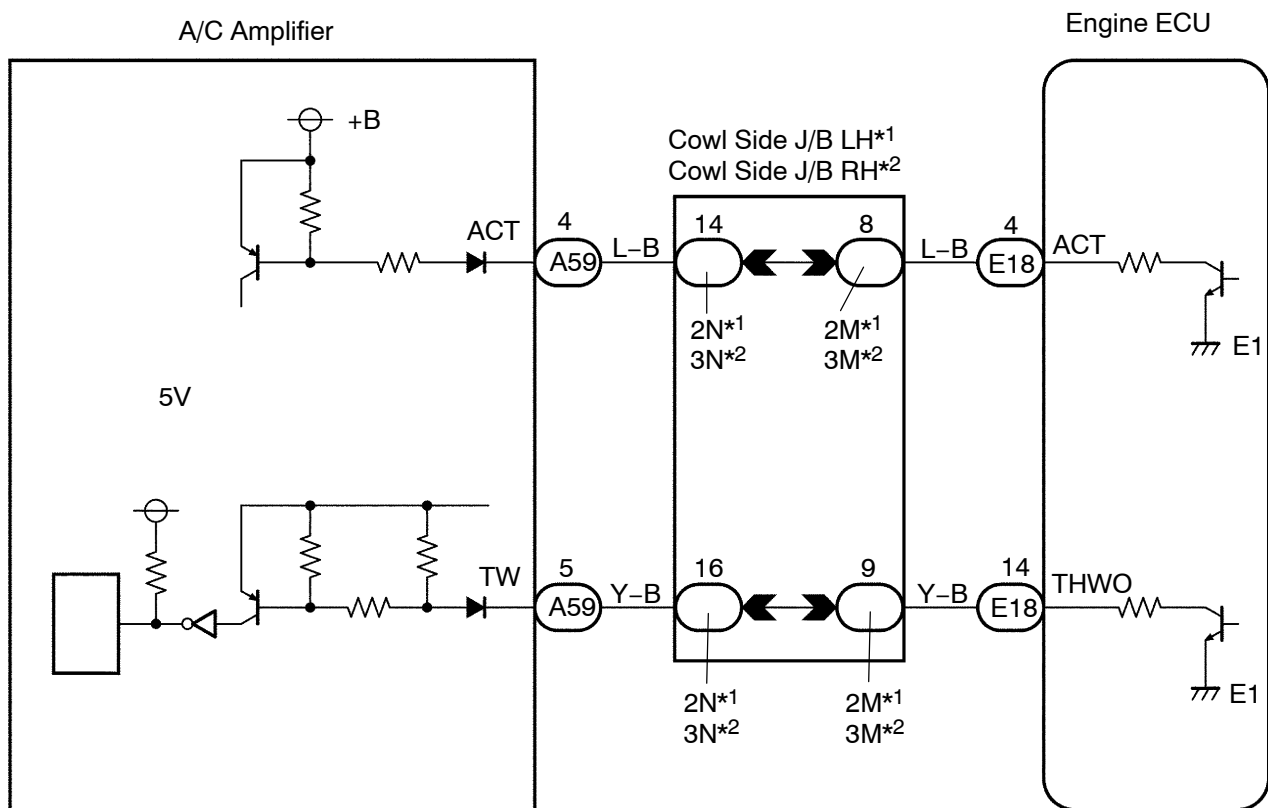

*1: RHD
*2: LHD

INSPECTION PROCEDURE

When using intelligent tester II:

1	Connect intelligent tester II and check operation of air conditioning cut control.
---	--

PREPARATION:

- (a) Connect the intelligent tester II to the DLC3.
- (b) Turn the ignition switch ON and push the intelligent tester II main switch ON.
- (c) Start the engine and air conditioning switch ON.

HINT:

A/C magnetic clutch is turned ON.

- (d) Select the Active Test mode on the intelligent tester II.

CHECK:

Check the A/C magnetic clutch cut operation when the air conditioning cut control is operated by the intelligent tester II.

OK:

A/C magnet clutch is turned OFF.

OK

Proceed to next circuit inspection shown on problem symptoms table ([See page DI-16](#)).

NG


- | | |
|---|--|
| 2 | Check for open and short in harness and connector between engine ECU and A/C amplifier (See page IN-19). |
|---|--|

NG

Repair or replace harness or connector.

OK

3 Check voltage between terminal ACT of engine ECU and body ground.

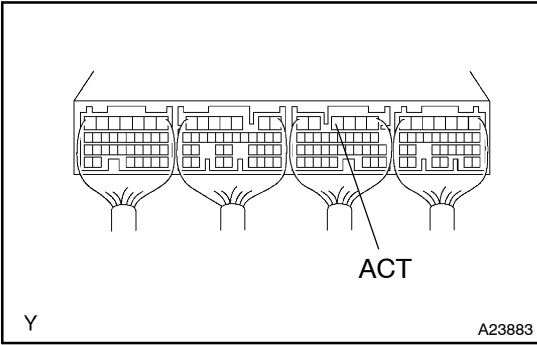

PREPARATION:

- (a) Remove the glove compartment door.
- (b) Start the engine.

CHECK:

Measure the voltage between terminal ACT of the engine ECU connector and body ground when the A/C switch is turned to ON and OFF.

OK:


A/C switch condition	Voltage
ON	9 to 14 V
OFF	0 to 3 V

NG

Check and replace A/C amplifier.

OK

4 Check voltage between terminal THWO of engine ECU and body ground.

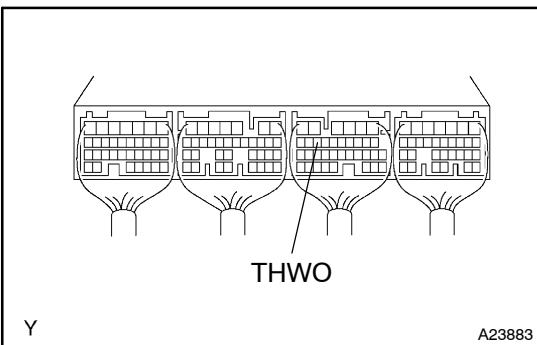

PREPARATION:


- (a) Remove the glove compartment door.
- (b) Turn the ignition switch ON.

CHECK:

Measure the voltage between terminal THWO of the engine ECU and body ground.

OK:

Voltage is generated intermittently.

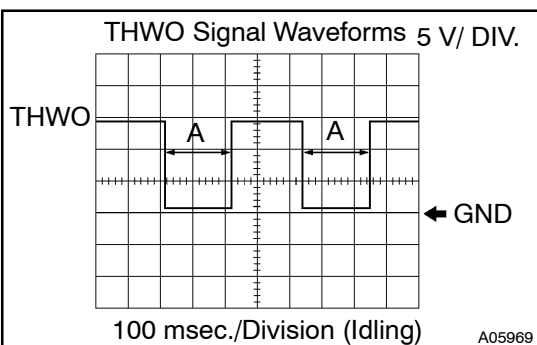

Reference: INSPECTION USING OSCILLOSCOPE

During idling, check the waveform between terminals THWO and E1 of the engine ECU.

HINT:

The correct waveform is as shown.

Water temp.	30°C (86°F) or less	Approx. 75°C (167°F)	90°C (194°F) or more
A	65 msec.	335.8 msec.	393 msec.

NG


Check and replace A/C amplifier.

OK

Check and replace engine ECU ([See page IN-19](#)).

When not using intelligent tester II:

1 Check voltage between terminal ACT of engine ECU and body ground.

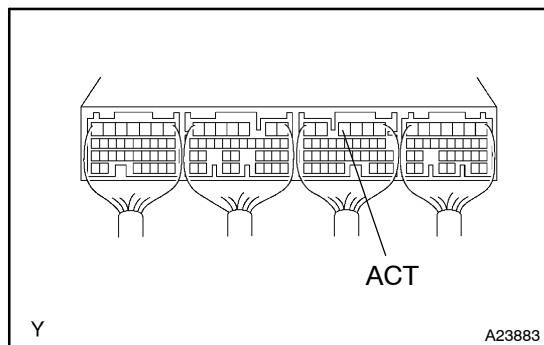

PREPARATION:

- (a) Remove the glove compartment door.
- (b) Start the engine.

CHECK:

Measure voltage between terminal ACT of engine ECU connector and body ground when A/C switch is turned to ON and OFF.

OK:

A/C switch condition	Voltage
ON	9 to 14 V
OFF	0 to 3 V

OK

Check and replace engine ECU ([See page IN-19](#)).

NG

2 Check voltage between terminal THWO of engine ECU and body ground ([See page DI-141 Step 4](#)).

OK

Check and replace engine ECU ([See page IN-19](#)).

NG

3 Check for open and short in harness and connector between engine ECU and A/C amplifier ([See page IN-19](#)).

NG

Repair or replace harness or connector.

OK

Check and replace A/C amplifier.