


TOYOTA and LEXUS Doorlock Interface

Installing a keyless entry system in some TOYOTA or LEXUS vehicles will require this DOORLOCK INTERFACE in the

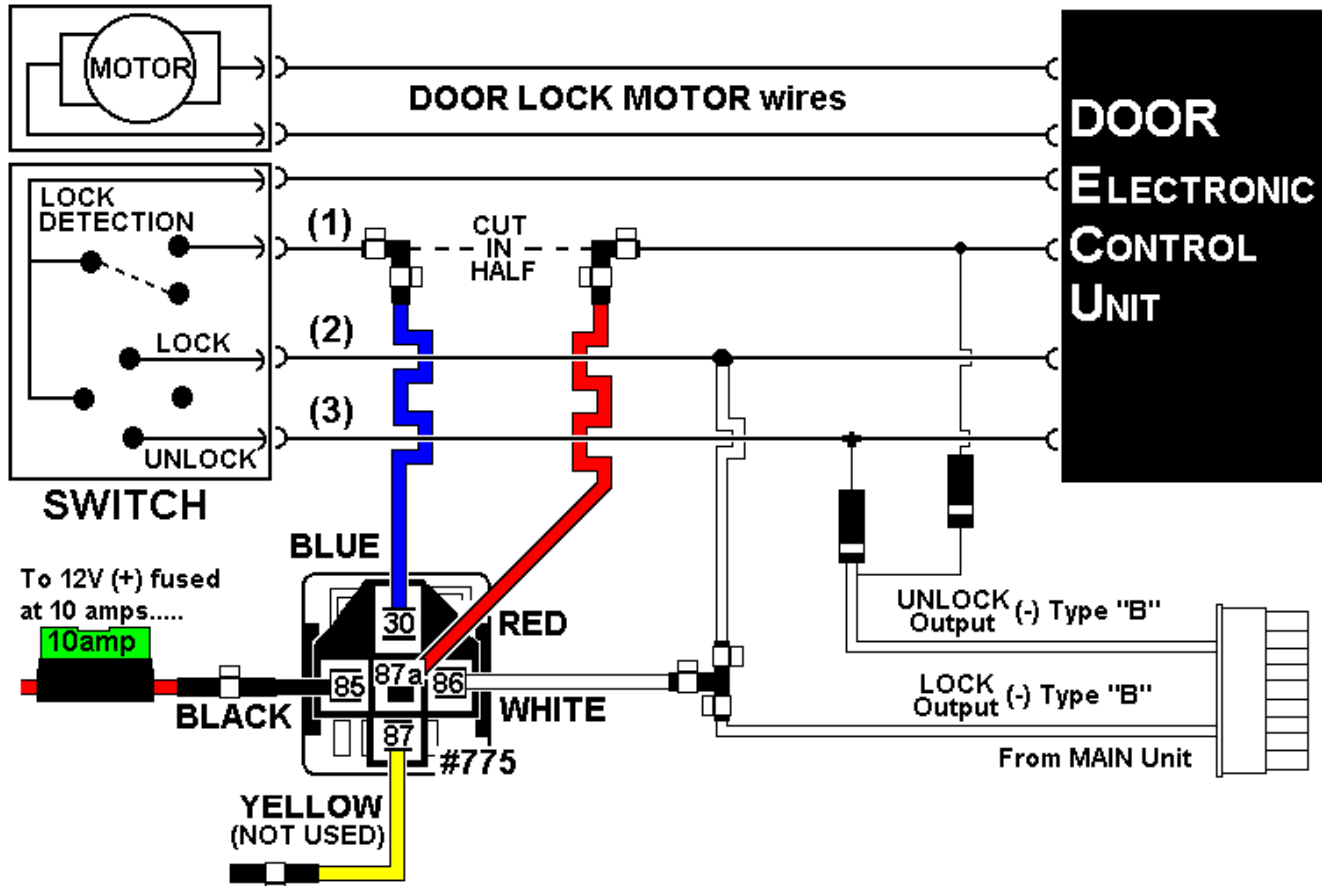

CAR	DRIVER DOOR			PASSENGER DOOR		
	(1)	(2)	(3)	(1)	(2)	(3)
98-up GS 300/400	Gray	Pink/Black	Pink/Green	Green	Pink/Black	Pink/Green
98-up RX 300	Gray	Pink	Pink/Blue	Gray	Pink	Pink/Blue
99-00 LS 400	Gray	Green/Orange	Green	Gray	Green/Orange	Green
01-up IS 300	Blue/Black	Green/Red	Green/Black	None	None	None
00-up AVALON	Lt. Green	Blue/White	Blue	Yellow	Blue/White	Blue/Yellow
01-up SCQUOIA	Red/Yellow	Lt. Green/Black	Lt. Green/Red	Red/Yellow	Lt.Green/Black	Lt.Green/Red
01-up HIGHLANDER	Green	Pink	Pink/Blue	Gray	Blue/White	Lt.Green

To UNLOCK ALL DOORS with a single pulse, this interface must be wired in the passenge door.
 When using a unit with a double pulse UNLOCK this interface can be wired in the drivers door.
 The TOYOTA AVALON WILL NOT WORK with a DOUBLE PULSE.