


HEATED OXYGEN SENSOR

INSPECTION

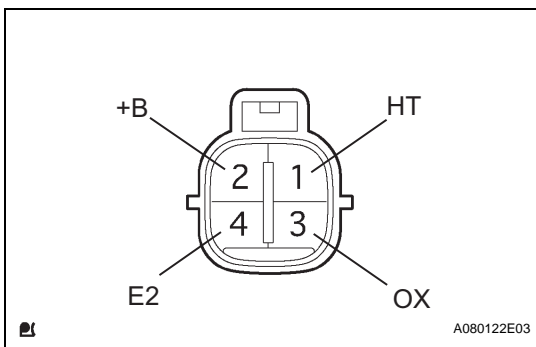


1. INSPECT HEATED OXYGEN SENSOR

- (a) Bank 1 oxygen sensor No. 2
 - (1) Using an ohmmeter, measure the resistance between the terminals.

Resistance

| Symbols (Terminal No.) | Resistance |
|-------------------------|---------------------------|
| HT (1) - +B (2) | 11 to 16 Ω at 20°C (68°F) |
| HT (1) - E2 (4) | No continuity |

If the resistance is not as specified, replace the sensor.

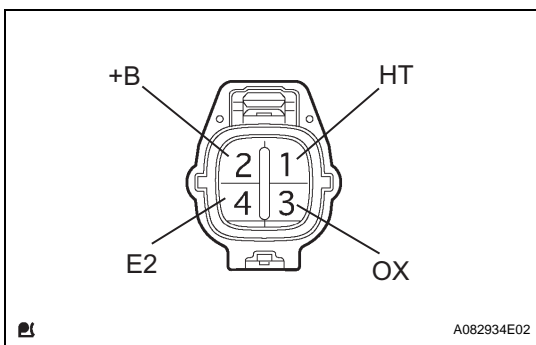

2. INSPECT HEATED OXYGEN SENSOR

- (a) Bank 2 oxygen sensor No. 2
 - (1) Using an ohmmeter, measure the resistance between the terminals.

Resistance

| Symbols (Terminal No.) | Resistance |
|-------------------------|---------------------------|
| HT (1) - +B (2) | 11 to 16 Ω at 20°C (68°F) |
| HT (1) - E2 (4) | No continuity |

If the resistance is not as specified, replace the sensor.