

POWER BACK DOOR OPENER / CLOSER SWITCH


INSPECTION

1. INSPECT POWER BACK DOOR OPENER/CLOSER SWITCH ASSEMBLY

- (a) Measure the resistance according to the value(s) in the table below.

Standard resistance

Tester Connection	Switch Position	Specified Condition
3 - 4	Pushed (ON)	10 kΩ or higher
3 - 4	Free (OFF)	Below 1 Ω

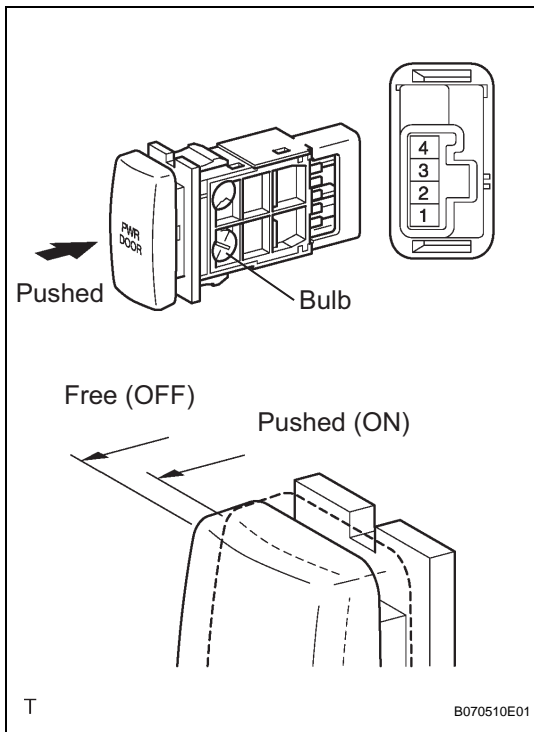

- (b) Check that the switch illuminates.

Standard

Measurement Condition	Specified Condition
Battery positive (+) → ILL+ (2) Battery negative (-) → ILL- (1)	Illuminates

If the result is not as specified, replace the switch assembly or bulb.

