


MOTUL TOP GREASE 200

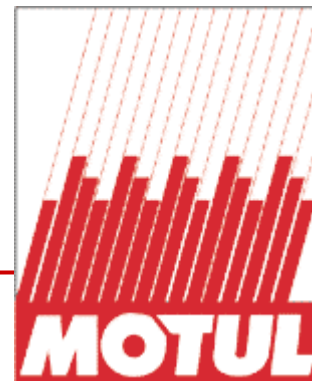

Multipurpose High Performance Grease

Lithium – Adherent

NLGI 2 - Extreme-pressure

TYPE OF USE

High performance multipurpose grease for roller bearings, articulations, bearings, hubs, cardan joints, ball joint, cables working under heavy loads and in humid conditions.
Car, Motorbike, Marine, Transport, Civil engineering machinery, industry and farm machines...

Temperature for use : -20°C / -4°F to +130°C / +266°F

PERFORMANCE

Multipurpose grease with lithium soap reinforced by adhesive polymers and with extreme-pressure, anti-wear, anti-oxidation & anti-corrosion additivation.

Excellent resistance to load thanks to a high performance extreme-pressure additivation.

Excellent adherence of the grease and resistance to washing out thanks to the use of a sticky polymer.

Good properties at cold temperatures.

Good mechanical stability.

Designation DIN 51 502: KP 2 K-20

PROPERTIES

| | | |
|---------------------------|-------------|--------------------------------|
| Colour | Visual | Orange |
| Consistency grade | DIN 51 818 | NLGI 2 |
| Soap | | Lithium |
| Penetrability - 60 cycles | ASTM D217 | 265 / 295 x10 ⁻¹ mm |
| Drop point | ASTM D 2265 | > 190°C / > 374°F |

Anti-corrosion EMCOR IP 2200 / 0

| | | |
|--------------------|-------------|-------------------|
| TIMKEN Test - load | ASTM D 2509 | 45 lb |
| FAG FE-9 Test | DIN 51 821 | F50>100h at 130°C |

We retain the right to modify the general characteristics of our products in order to offer to our customers the latest technical development

Product specifications are definitive from the order which is subject to our general conditions of sale and warranty. Made in FRANCE

MOTUL - 119 Bd Félix Faure - 93303 AUBERVILLIERS CEDEX - BP 94 - France - Tel 33 1 48 11 70 00 - FAX 33 1 48 33 28 - Web site : www.motul.com

8036

06/00