

5. Back-up Light System


A: SCHEMATIC

<Ref. to WI-120, SCHEMATIC, Back-up Light System.>

B: INSPECTION

1. BACK-UP LIGHT SWITCH (M/T)


Measure back-up light switch resistance.

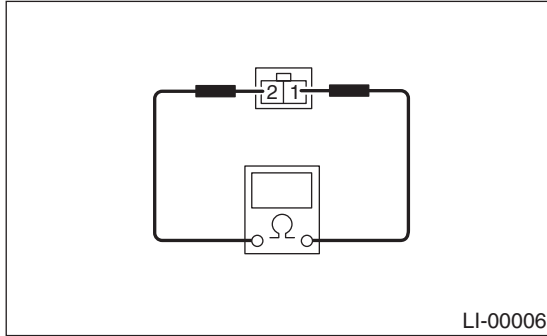

Switch position	Terminal No.	Standard
When shift lever is set in reverse position	1 and 2	Less than 1 Ω
Other positions		More than 1 MΩ

2. INHIBITOR SWITCH (A/T)

Measure inhibitor switch resistance.

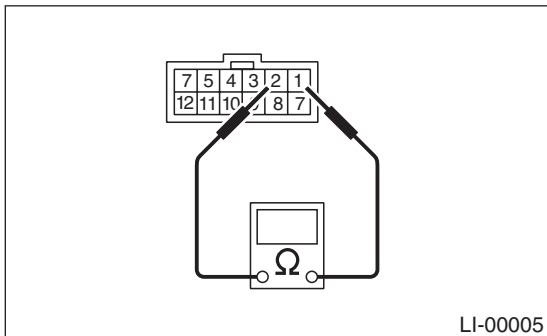

Switch position	Terminal No.	Standard
When select lever is set in "R" position	1 and 2	Less than 1 Ω
Other positions		More than 1 MΩ