

Room Light System

LIGHTING SYSTEM

7. Room Light System

A: WIRING DIAGRAM


1. ROOM LIGHT

<Ref. to WI-119, WIRING DIAGRAM, Interior Light System.>

B: INSPECTION

1. DOOR SWITCH

Measure the door switch resistance.

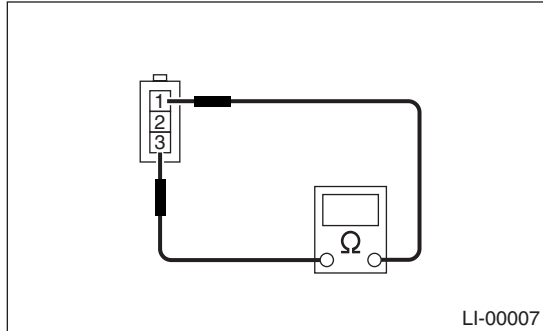

Switch position	Terminal No.	Standard
When door is opened	1 and 3	Less than 1 Ω
When door is closed		1 M Ω or more

2. REAR GATE LATCH SWITCH

Measure the rear gate latch switch resistance.

Switch position	Terminal No.	Standard
When rear gate is opened	1 and 2	Less than 1 Ω
When rear gate is closed		1 M Ω or more