
1. General Description

A: SPECIFICATION

Model		Rear disc brake
Туре		Electronic type, drum in disc brakes
Effective drum diameter	mm (in)	190 (7.48)
Lining dimension (Length × Width × Thickness)	mm (in)	$165.0 \times 30.0 \times 3.5 \ (6.5 \times 1.181 \times 0.14)$
Clearance adjustment		Manual adjustment

B: COMPONENT


1. PARKING BRAKE (REAR DISC BRAKE)

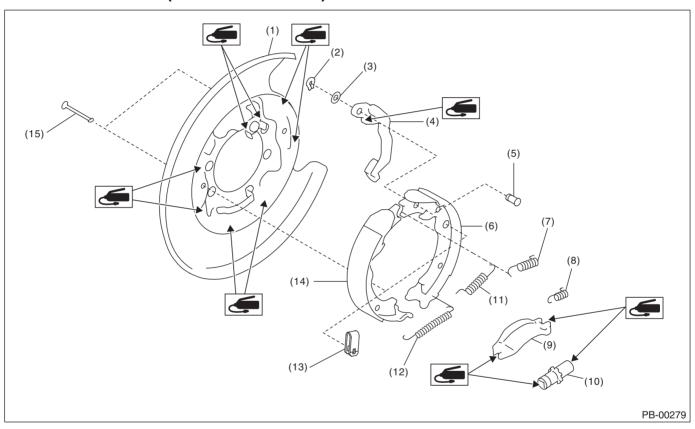

- (1) Back plate
- (2) Retainer
- (3) Wave washer
- (4) Lever
- (5) Pin parking lever
- (6) Parking brake shoe (secondary)
- (7) Secondary return spring
- (8) Spring strut
- (9) Strut
- (10) Adjusting screw
- (11) Primary return spring
- (12) Adjusting spring

- (13) Shoe hold-down spring
- (14) Parking brake shoe (primary)
- (15) Shoe hold-down pin

2. PARKING BRAKE ACTUATOR

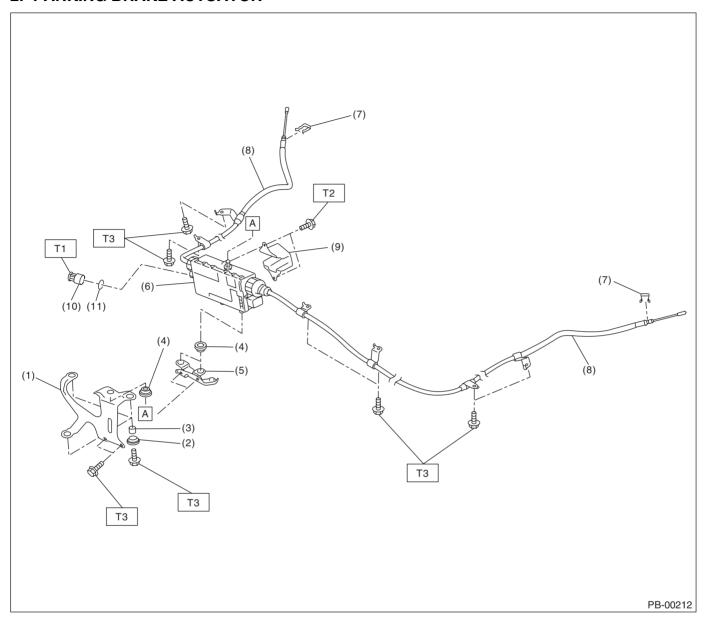

- (1) Upper bracket
- (2) Bushing
- (3) Spacer
- (4) Bushing
- (5) Bracket
- (6) Brake actuator

- (7) Clamp
- (8) Parking brake cable
- (9) Tank bracket
- (10) Cap
- (11) O-ring

Tightening torque: N⋅m (kgf-m, ft-lb)

T1: 3 (0.31, 2.2)

T2: 7.5 (0.76, 5.5)

T3: 18 (1.84, 13.3)

C: CAUTION

- Wear appropriate work clothing, including a helmet, protective goggles and protective shoes when performing any work.
- Before removal, installation or disassembly, be sure to clarify the failure. Avoid unnecessary removal, installation, disassembly and replacement.
- · Vehicle components are extremely hot after driving. Be wary of receiving burns from heated parts.
- Use SUBARU genuine grease etc. or equivalent. Do not mix grease etc. of different grades or manufacturers.
- Be sure to tighten fasteners including bolts and nuts to the specified torque.
- Place shop jacks or rigid racks at the specified points.
- Make sure grease does not come into contact with the parking shoes.

D: PREPARATION TOOL

1. SPECIAL TOOL

ILLUSTRATION	TOOL NUMBER	DESCRIPTION	REMARKS
	1B022XU0	SUBARU SELECT MONITOR III KIT	Used for setting of each function and trouble- shooting for electrical system.
ST1B022XU0			

2. GENERAL TOOL

TOOL NAME	REMARKS
Circuit tester	Used for measuring resistance, voltage and current.