

2003-06 ACCESSORIES & EQUIPMENT

Console - Element


CENTER CONSOLE REMOVAL/INSTALLATION

NOTE: Take care not to scratch the front seat and related parts.

1. Pull the front edge of the center console (A) to release the clips, and remove the console by releasing the hooks (B).

Fastener Locations

▷ : Clip, 2

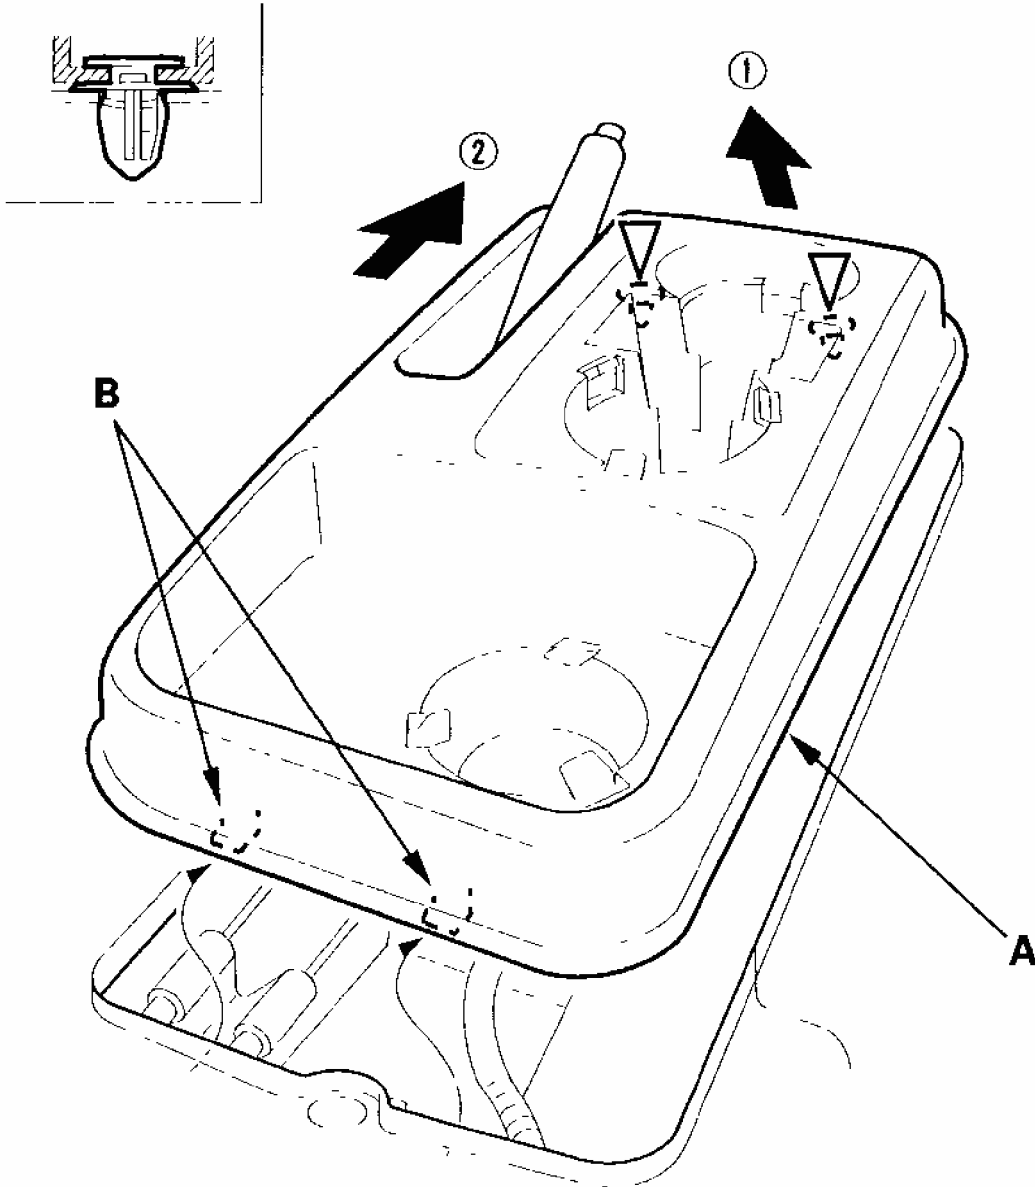

G03679406

Fig. 1: Removing Center Console

Courtesy of AMERICAN HONDA MOTOR CO., INC.

2. Install the console in the reverse order of removal, and note these items:
 - Check for damaged or stress-whitened clips, and replace them with new ones.
 - Push the clip portions into place securely.