

7. Stop Light System

A: WIRING DIAGRAM


1. STOP LIGHT

<Ref. to WI-134, WIRING DIAGRAM, Stop Light System. >

B: INSPECTION

1. STOP LIGHT SWITCH

Measure the resistance between stop light switch terminals.

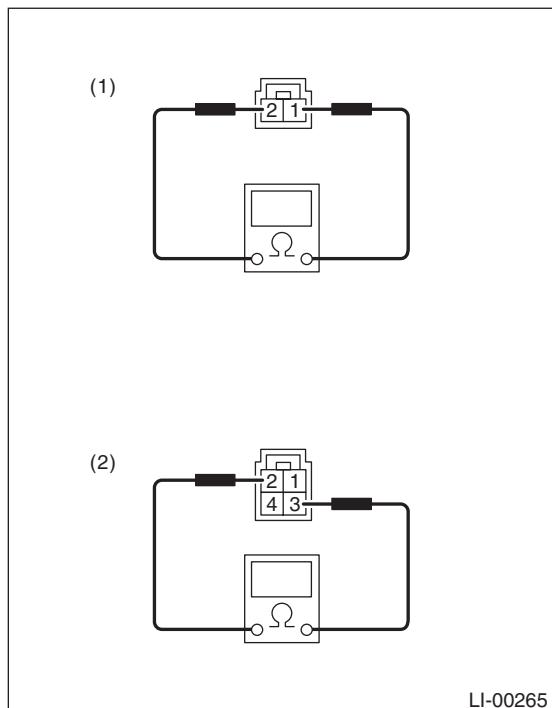

LI-00265

(1) Models without cruise control

(2) Models with cruise control

Switch position	Terminal No.	Standard
When brake pedal is depressed	Models without cruise control: 1 and 2	Less than 1 Ω
When brake pedal is released	Models with cruise control: 2 and 3	1 MΩ or more