

## 9. Stop Light System

### A: WIRING DIAGRAM


Refer to "Stop Light System" in the WIRING DIAGRAM. <Ref. to WI-220, WIRING DIAGRAM, Stop Light System.>

### B: INSPECTION

#### 1. CHECK STOP LIGHT SWITCH

- 1) Disconnect the stop light switch connector.
- 2) Measure the resistance between stop light switch terminals.

*Preparation tool: Circuit tester*

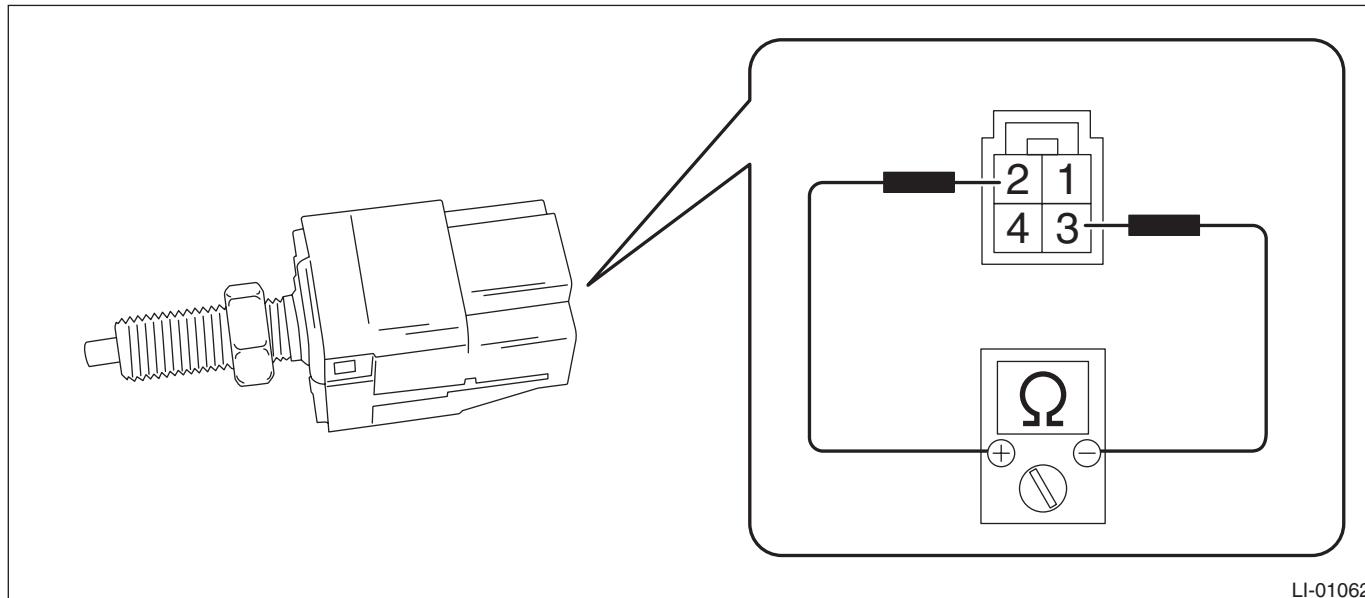

Terminal No.	Inspection conditions	Specification
2 — 3	When brake pedal is depressed	Less than 1 Ω
	When brake pedal is released	1 MΩ or more

- 3) Replace the stop light switch if the inspection result is not within the standard value.

### C: NOTE

For operation procedures of each component of the stop light system, refer to the respective section.

- Rear combination light assembly: <Ref. to LI-44, Rear Combination Light Assembly.>
- Rear finisher light assembly: <Ref. to LI-53, Rear Finisher Light Assembly.>
- Tail light/stop light bulb: <Ref. to LI-46, Tail/Stop Light Bulb.>
- High-mounted stop light: <Ref. to LI-59, High-mounted Stop Light.>