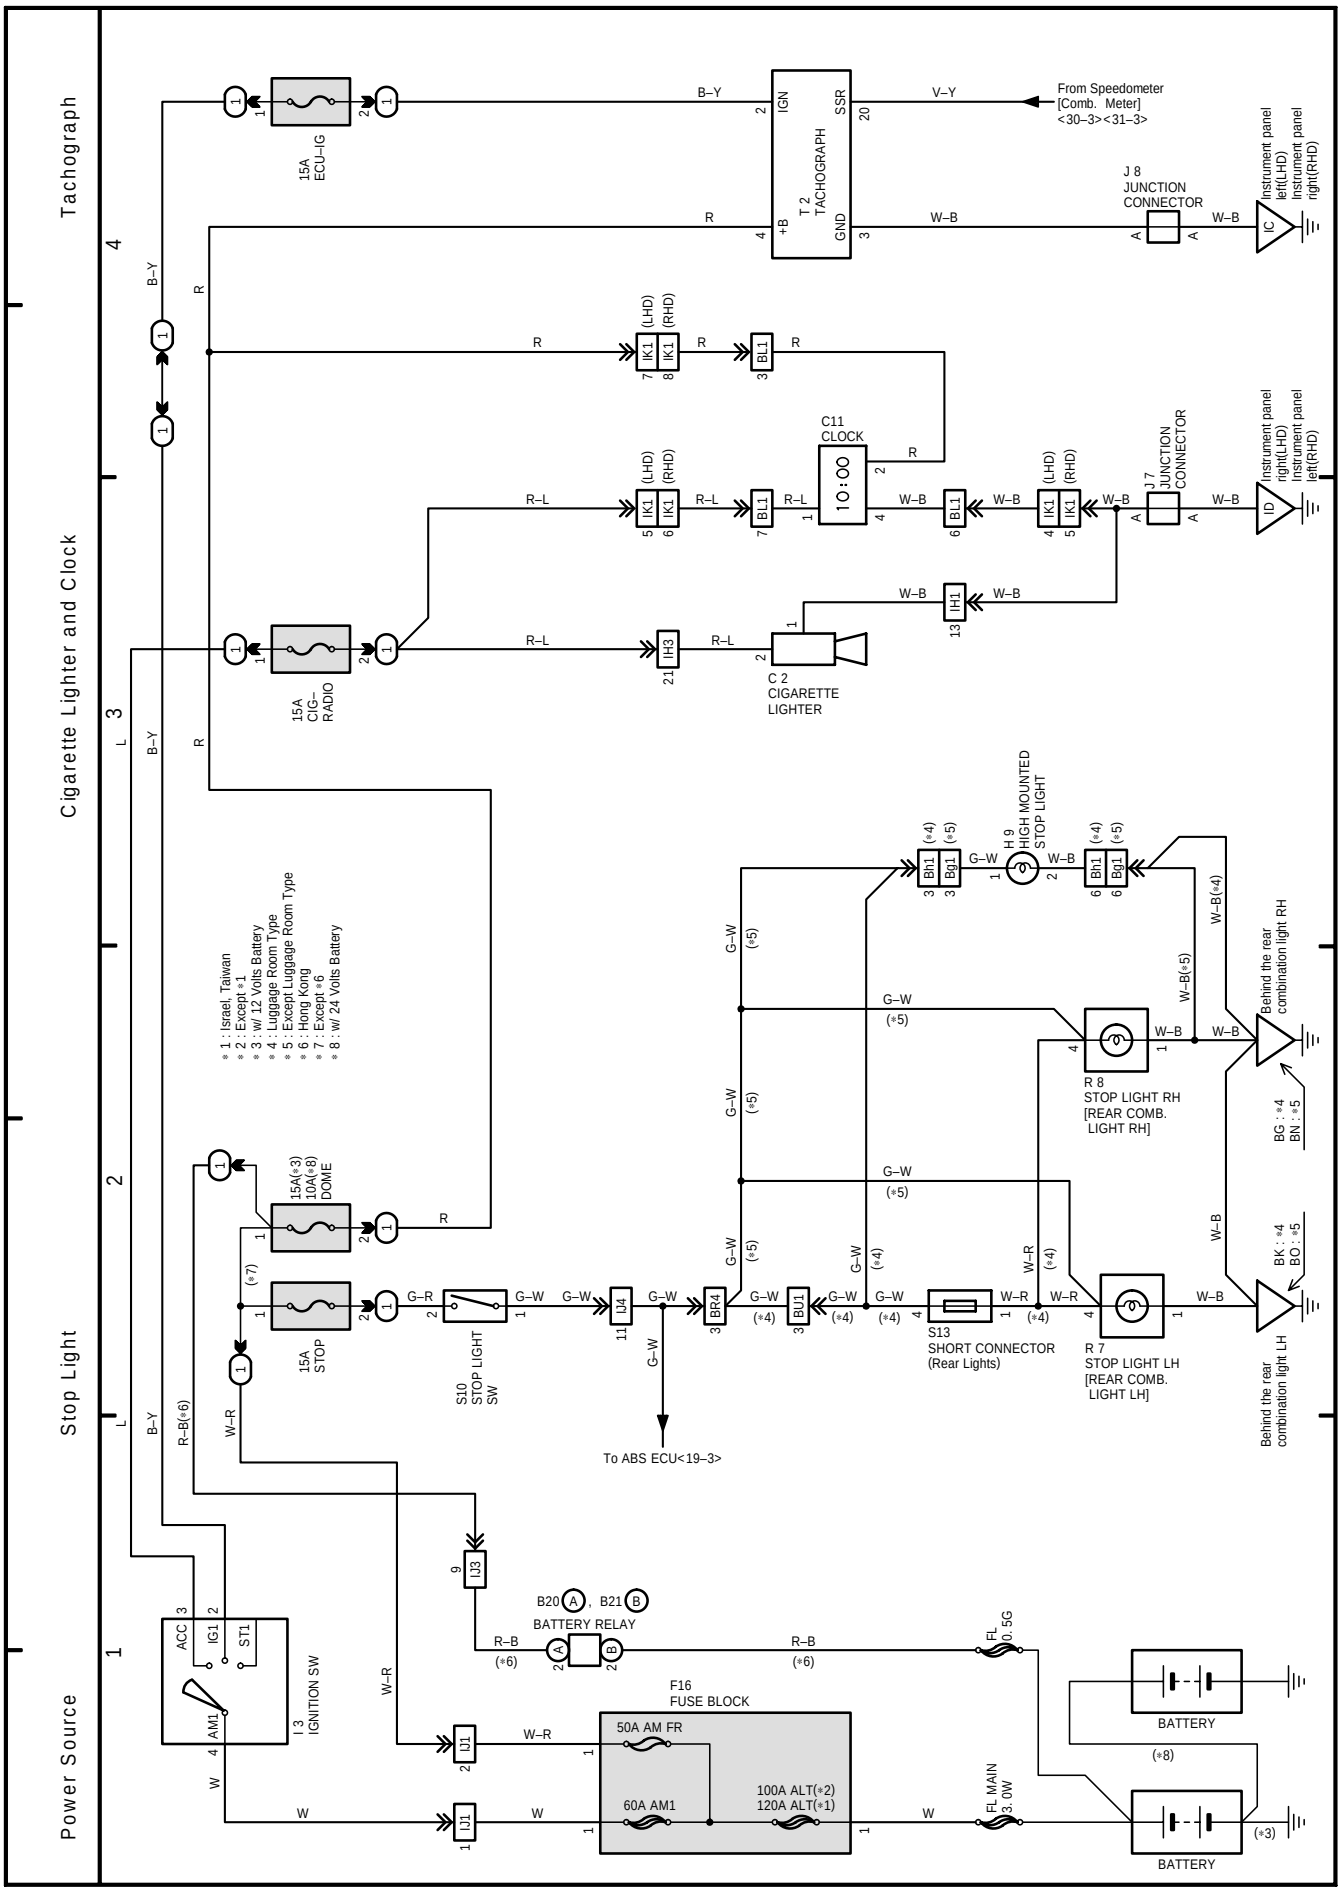

Tachograph
Cigarette Lighter and Clock
Stop Light
Power Source
15A ECU–IG
IGN
SSR
TACHOGRAPH
T 2
+B
GND
From Speedometer [Comb. Meter] <30–3><31–3>
J 8 JUNCTION CONNECTOR
Instrument panel left(LHD) Instrument panel right(RHD)
C11 CLOCK
J 7 JUNCTION CONNECTOR
15A CIG– RADIO
C 2 CIGARETTE LIGHTER
H 9 HIGH MOUNTED STOP LIGHT
15A(*3) 10A(*8) DOME
15A STOP
S10 STOP LIGHT SW
To ABS ECU<19–3>
R 8 STOP LIGHT RH [REAR COMB. LIGHT RH]
R 7 STOP LIGHT LH [REAR COMB. LIGHT LH]
Behind the rear combination light RH
Behind the rear combination light LH
S13 SHORT CONNECTOR (Rear Lights)
BG : *4 BN : *5
BK : *4 BO : *5
* 1 : Israel, Taiwan
* 2 : Except *1
* 3 : w/ 12 Volts Battery
* 4 : Luggage Room Type
* 5 : Except Luggage Room Type
* 6 : Hong Kong
* 7 : Except *6
* 8 : w/ 24 Volts Battery
B20 A , B21 B
BATTERY RELAY
I 3 IGNITION SW
ACC
IG1
ST1
AM1
F16 FUSE BLOCK
50A AM FR
60A AM1
100A ALT(*2) 120A ALT(*1)
FL 0.5G
FL MAIN 3.0W
BATTERY
(*8)
(*3)