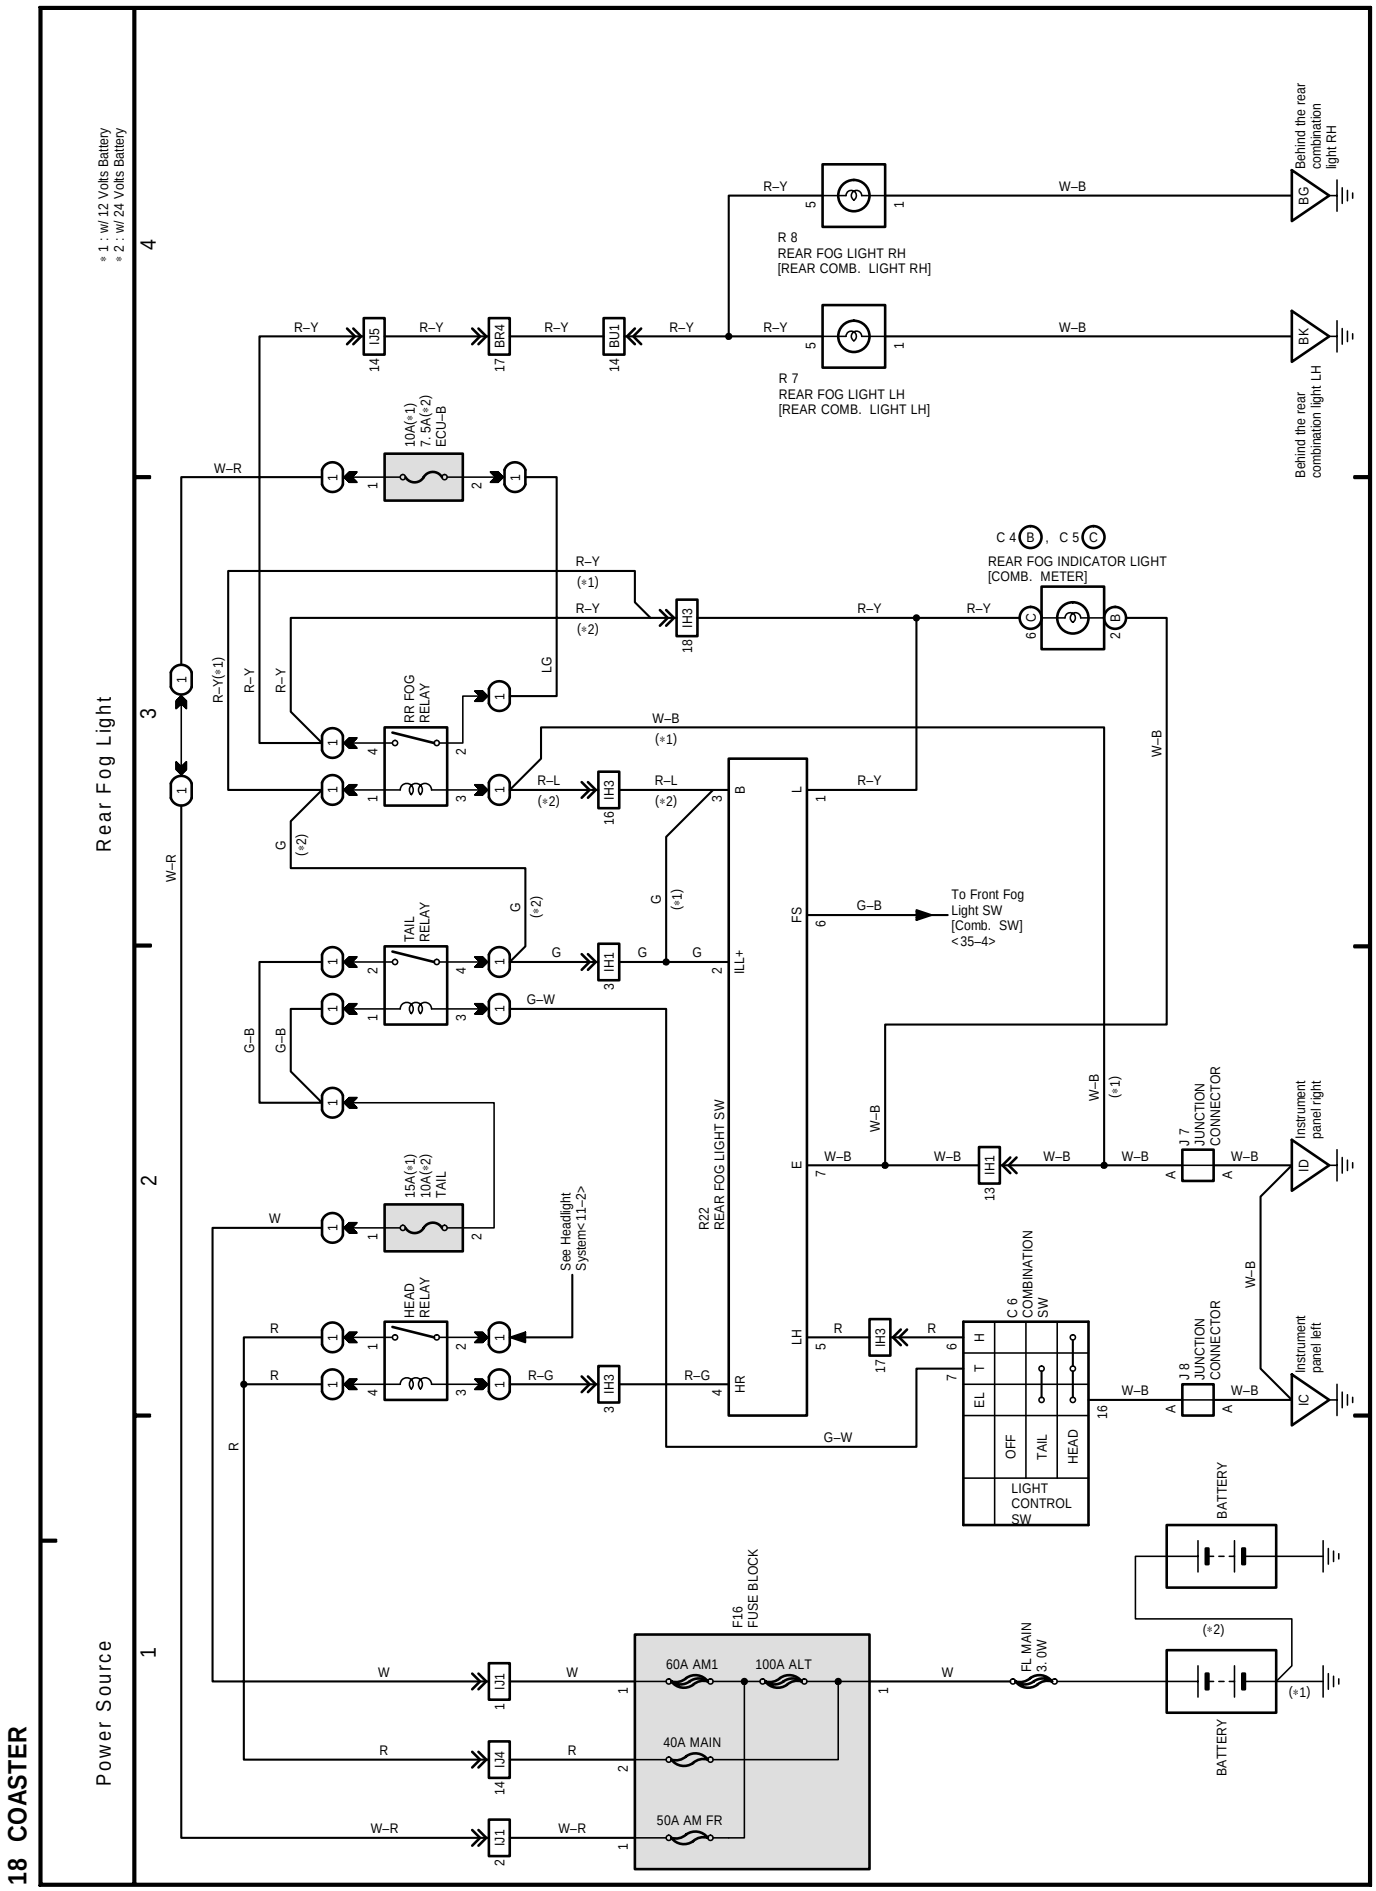

18 COASTER
Power Source
Rear Fog Light
* 1 : w/ 12 Volts Battery
* 2 : w/ 24 Volts Battery
Behind the rear combination light RH
Behind the rear combination light LH
R 8
REAR FOG LIGHT RH
[REAR COMB. LIGHT RH]
R 7
REAR FOG LIGHT LH
[REAR COMB. LIGHT LH]
C 4 B , C 5 C
REAR FOG INDICATOR LIGHT
[COMB. METER]
10A(*1)
7. 5A(*2)
ECU–B
RR FOG
RELAY
TAIL
RELAY
HEAD
RELAY
15A(*1)
10A(*2)
TAIL
R22
REAR FOG LIGHT SW
To Front Fog
Light SW
[Comb. SW]
<35–4>
See Headlight
System<11–2>
C 6
COMBINATION
SW
LIGHT
CONTROL
SW
OFF
TAIL
HEAD
J 7
JUNCTION
CONNECTOR
J 8
JUNCTION
CONNECTOR
Instrument
panel right
Instrument
panel left
F16
FUSE BLOCK
60A AM1
100A ALT
40A MAIN
50A AM FR
FL MAIN
3. 0W
BATTERY
BATTERY