
DTC B1499/99 MULTIPLEX COMMUNICATION CIRCUIT

CIRCUIT DESCRIPTION

The ECM and A/C amplifier communicate via BEAN.
This DTC is output when communication stops.

DTC No.	Detection Item	Trouble Area
B1499/99	Multiplex communication circuit	• Open in multiplex communication circuit

WIRING DIAGRAM

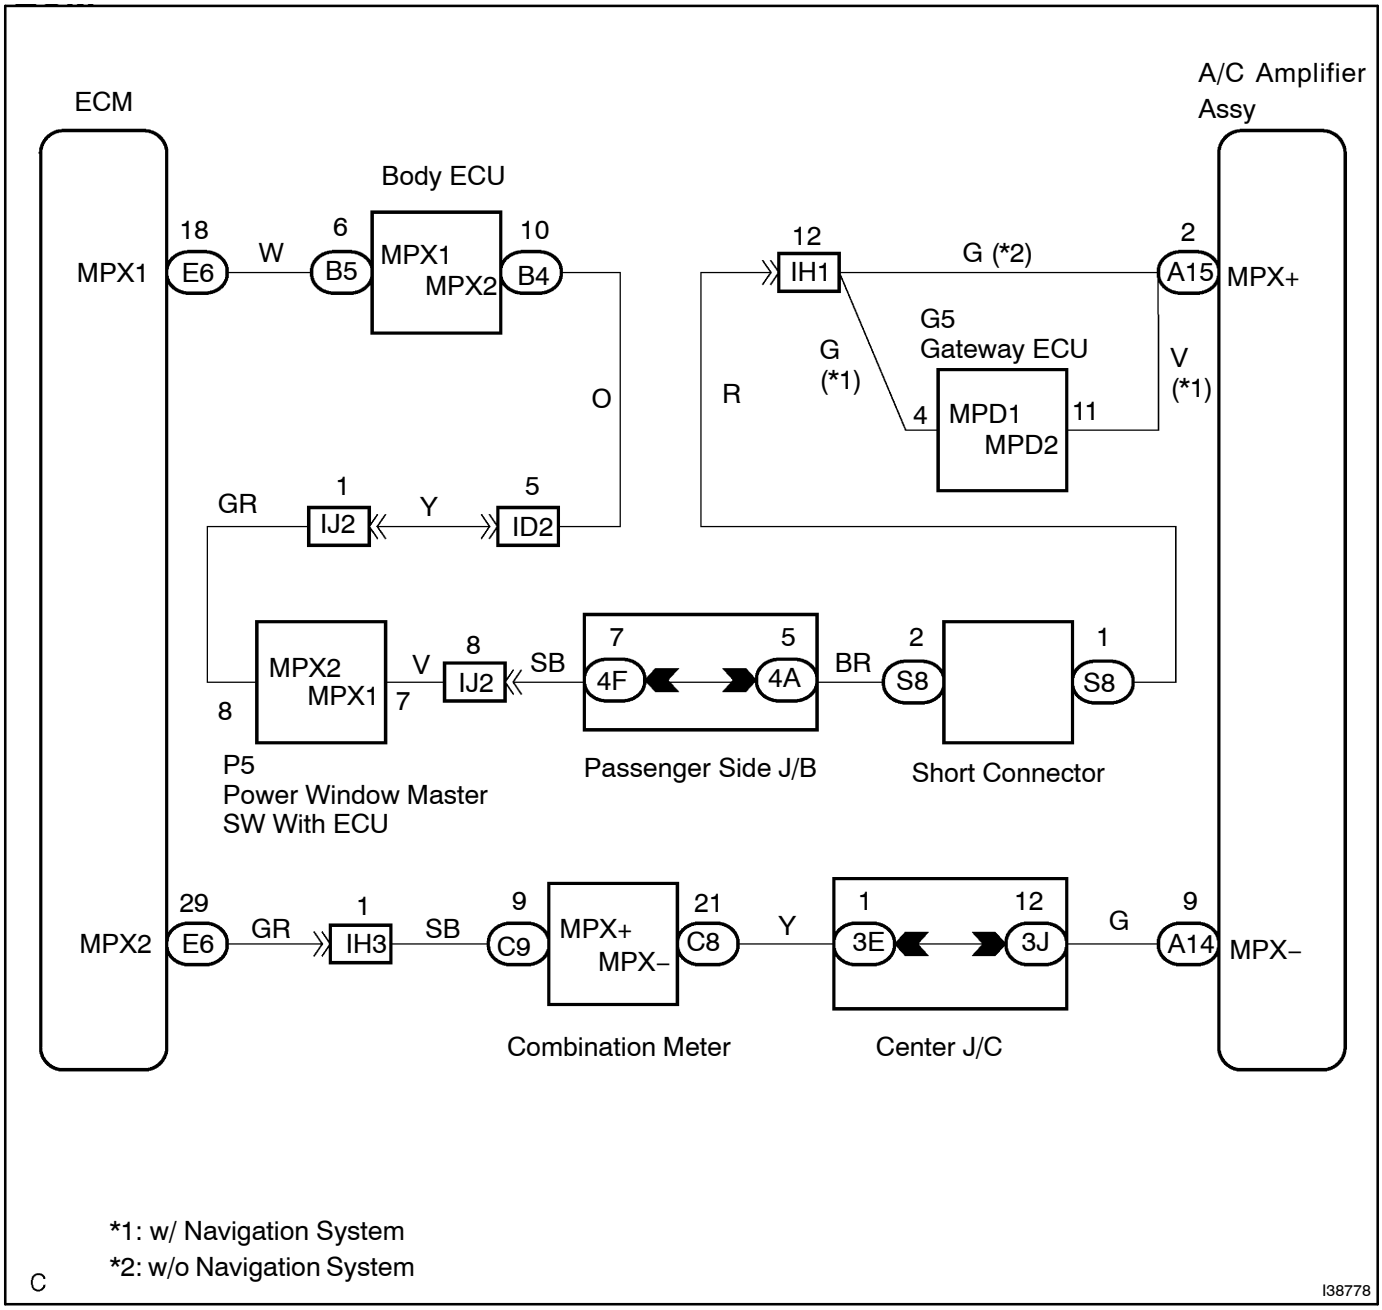

INSPECTION PROCEDURE

1	CHECK MULTIPLEX COMMUNICATION SYSTEM (SEE PAGE 05–1132)

NG → GO TO MULTIPLEX COMMUNICATION SYSTEM

OK

REPLACE AIRCONDITIONER AMPLIFIER ASSY