




ROOF PANEL (ASSY): w/o Moon Roof

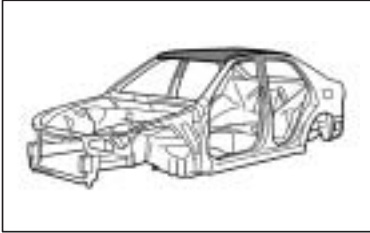

REMOVAL

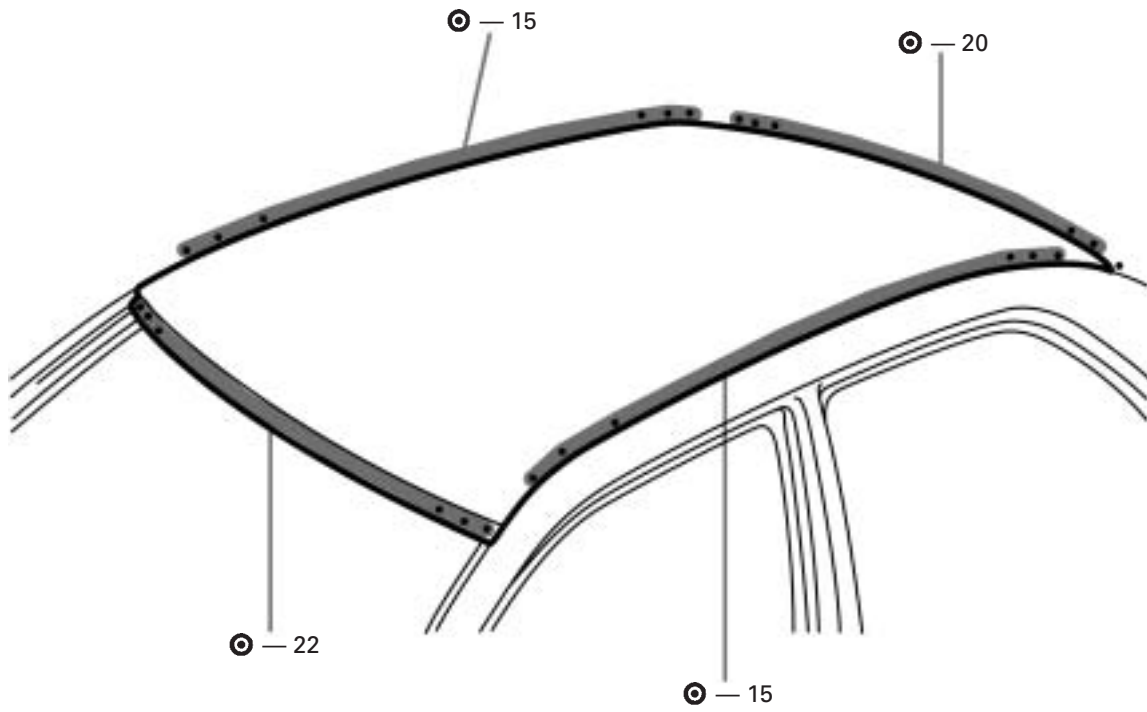

INSTALLATION

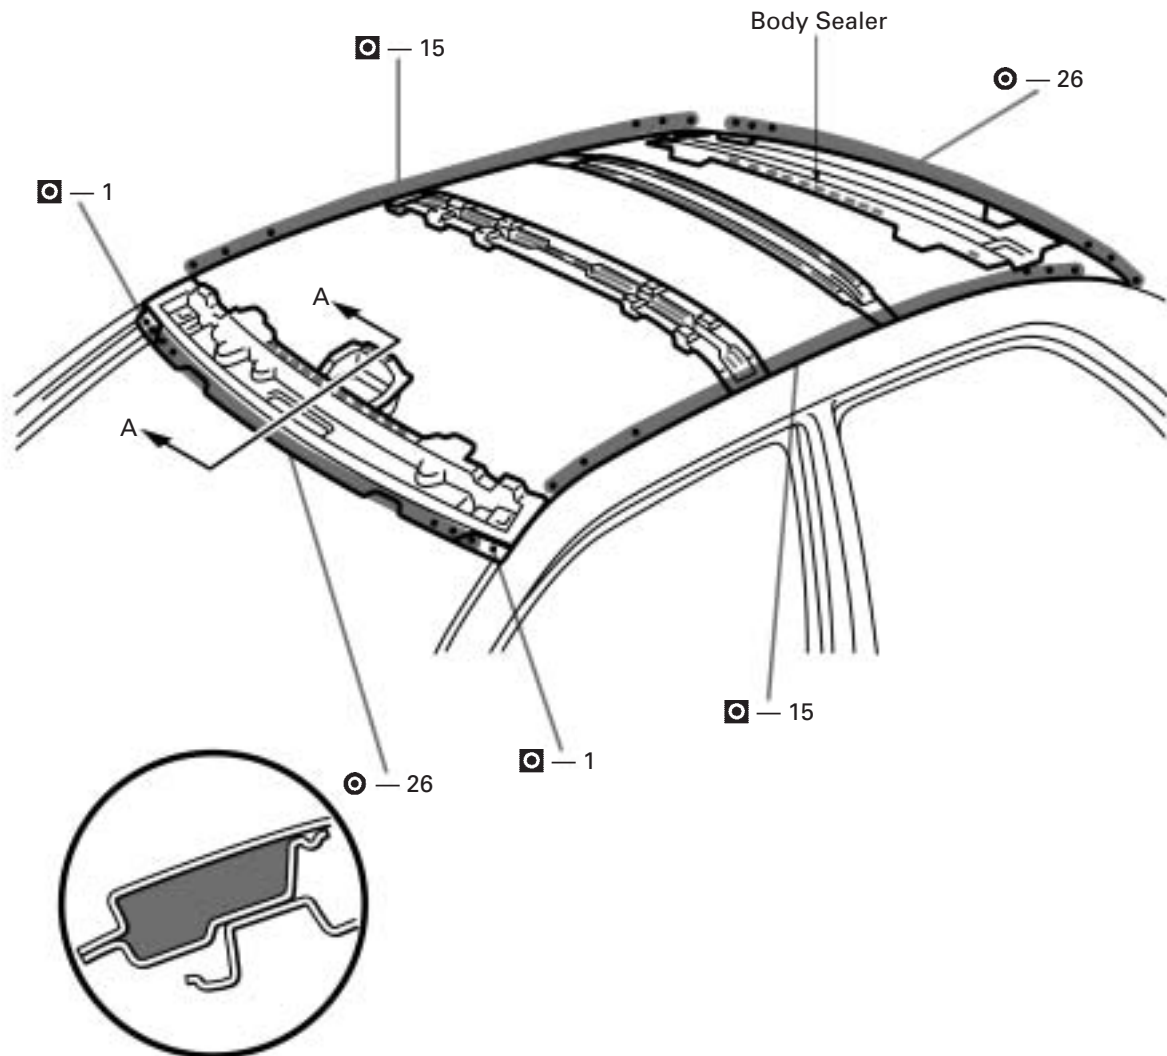

A - A
[Foamed Materials Application Area]

1. Before temporarily installing the new parts, apply body sealer to the windshield header panel, roof panel reinforcement and back window frame.
2. After installing the new parts, apply foamed materials.

HINT: Apply just enough sealer for the new parts to make contact.