■ REAR FOG LIGHT

1. General


The rear fog light makes the car highly visible in the rain or fog to other drivers driving bihind. The basic construction is the same as in the previous model. On the new model, the operating condition of the rear fog light has been revised to prevent it from being left on unintentionally.

2. Wiring Diagram

3. Construction and Operation

Rear Fog Light Switch


- The rear fog light switch is a momentary type switch. This switch turns on upon pressing and turns off upon pressing it again.
- When the taillight switch is turned off with the rear fog light switch on, the rear fog light switch is turned off also.

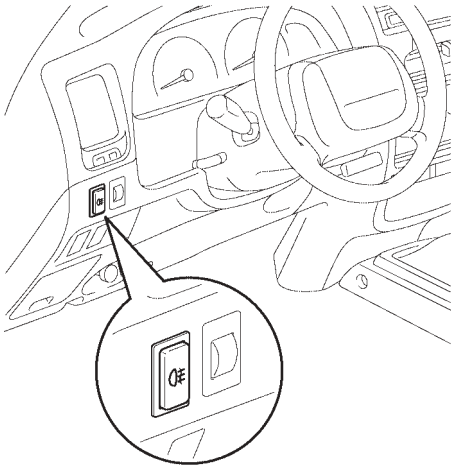

140BE04

System Operation

The rear fog light turns on when the rear fog light switch is pressed, in accordance with the taillights and headlights turned on. However, once the rear fog light is turned on, it will remain on even after the headlights and front fog light are turned off. Once the rear fog light is turned off by turning the taillight switch off, the rear fog light will not turn on again unless the rear fog light switch is pressed again.

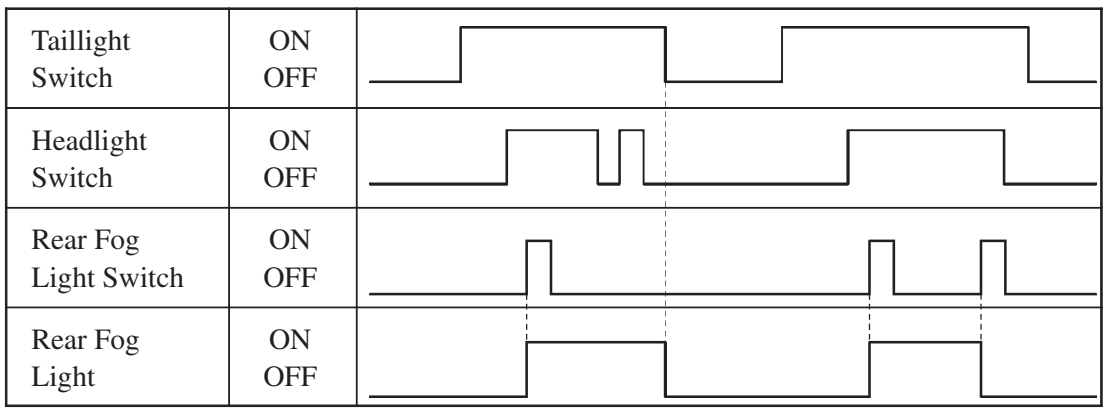

140BE05

BE