
■ SEAT BELT WARNING

1. General

If the driver turns ON the ignition switch without wearing the seat belt, the seat belt warning system flashes the indicator light and sounds the buzzer to inform the driver that the seat belt is not being worn.

2. Wiring Diagram

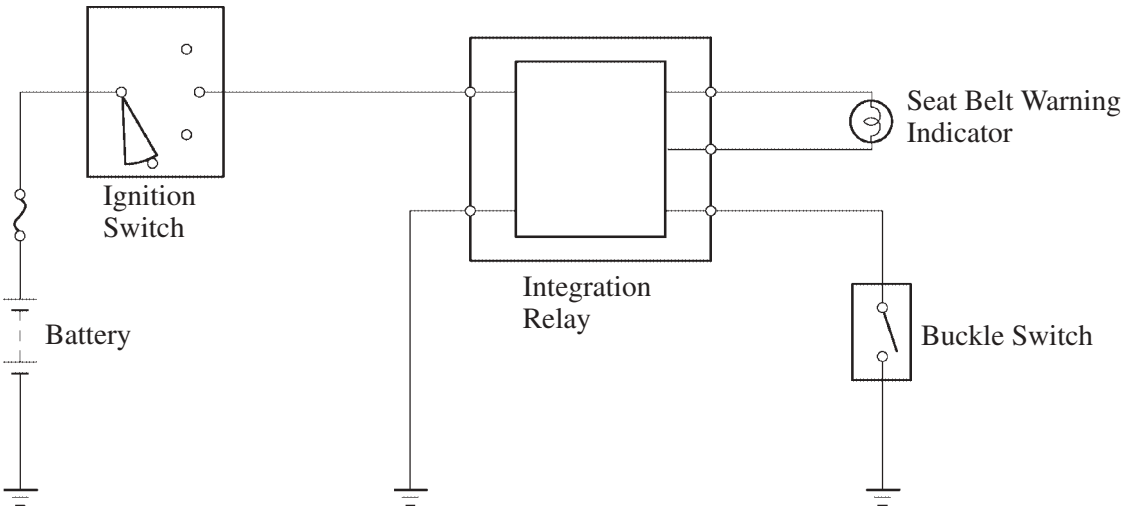

140BE23

3. Operation

If the driver turns ON the ignition switch without wearing the seat belt, the buckle switch that is enclosed in the driver's seat belt buckle stays ON, causing the integration relay to flash the indicator light in the combination meter. At the same time, the relay sounds the warning buzzer to inform the driver that the seat belt is not being worn.