


DTC	B2791/99	Key Unlock Warning SW OFF Malfunction
-----	----------	---------------------------------------

CIRCUIT DESCRIPTION

DTC No.	DTC Detecting Condition	Trouble Area
B2791/99	• Open circuit in key unlock warning switch circuit. • Key unlock warning switch adheres to OFF position.	• Key unlock warning switch • Wire harness

WIRING DIAGRAM

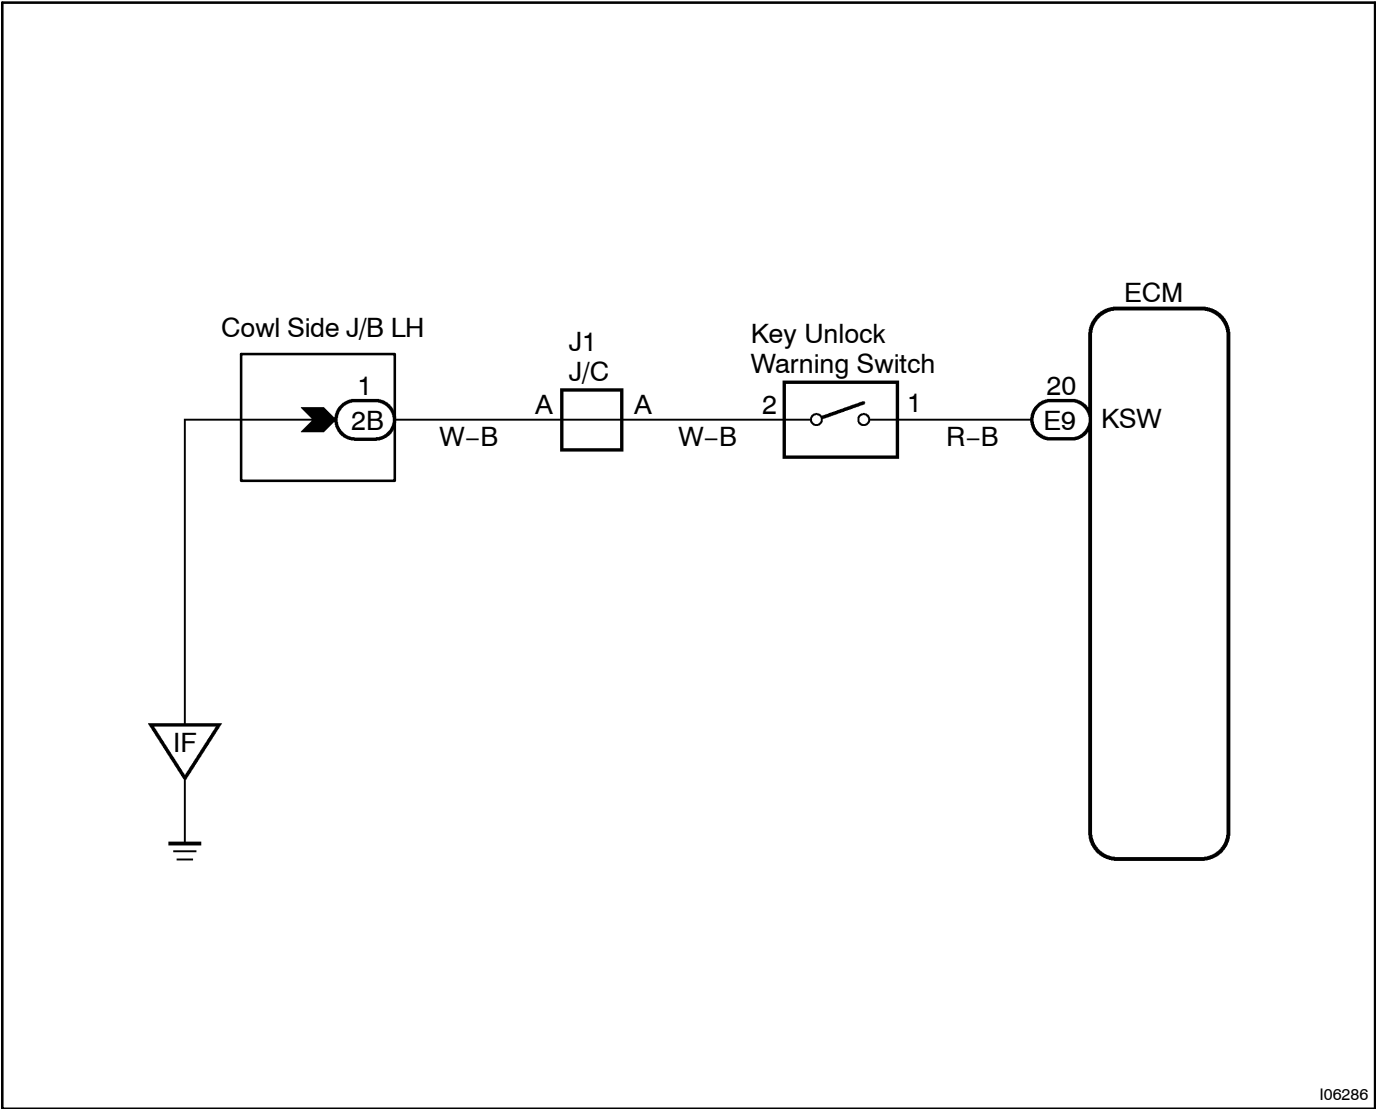

I06286

INSPECTION PROCEDURE

1 Check key unlock warning switch (See page [BE-18](#)).

NG

Replace key unlock warning switch.

OK

2 Check harness and connector between key unlock warning switch and ECM.

NG

Repair or replace the harness or connector.

OK

Replace ECM