


REMOVAL

1. REMOVE FRONT WHEEL
2. REMOVE FRONT SHOCK ABSORBER
(See page SA-19)

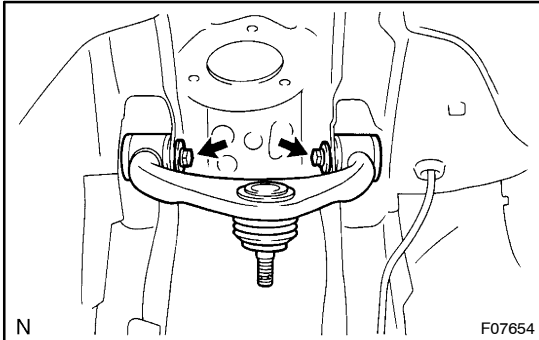

3. REMOVE UPPER SUSPENSION ARM

Remove the 2 bolts and upper suspension arm from the body.