


DTC	B2791/99	Key Unlock Warning SW OFF Malfunction
------------	-----------------	--

CIRCUIT DESCRIPTION

DTC No.	DTC Detecting Condition	Trouble Area
B2791/99	- Open circuit in key unlock warning switch circuit. - Key unlock warning switch adheres to OFF position.	- Key unlock warning switch - Wire harness

WIRING DIAGRAM

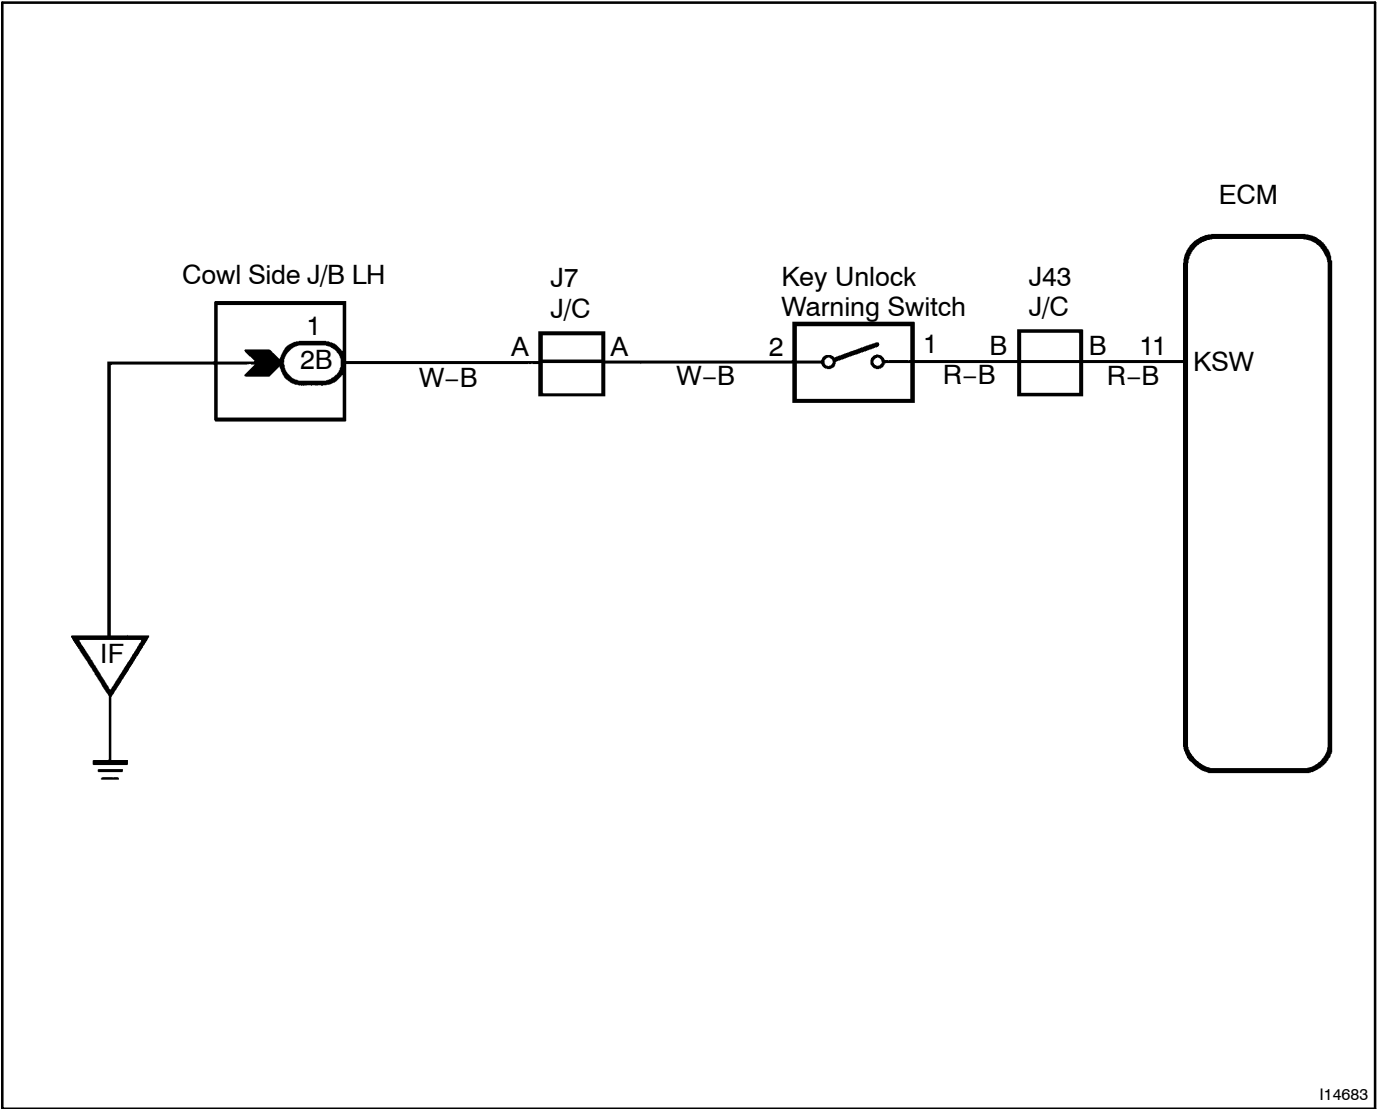

I14683

INSPECTION PROCEDURE

1	Check key unlock warning switch (See page BE-18).
----------	--

NG**Replace key unlock warning switch.****OK**

2	Check harness and connector between key unlock warning switch and ECM.
----------	---

NG**Repair or replace the harness or connector.****OK****Replace ECM.**