

OUTSIDE MOULDING

COMPONENTS

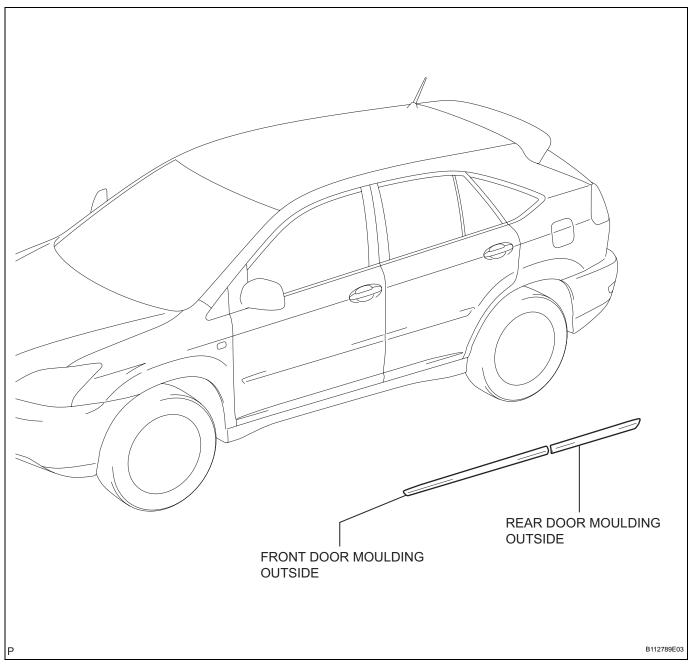



REMOVAL

- 1. REMOVE OUTSIDE MOULDING
 - (a) Using a heat light, heat the moulding.

Heating temperature: 40 - 60°C (104 - 140°F)

NOTICE:

Do not heat the moulding excessively.

(b) Tie both the piano wire ends to wooden blocks or equivalents.



(c) Scrape tape off by pulling the piano wire and remove the moulding with reference pins remaining on the moulding.

NOTICE:

- If reusing the moulding, take care not to damage the moulding.
- Do not damage the body.
 (d) Remove the moulding.