■ILLUMINATED ENTRY SYSTEM


1. General

The illuminated entry system has the following control functions:

Control	Outline	Lights that Operate
Transmitter-linked	When any door is unlocked using the transmitter, the lights listed on the right turn ON.	● Key Illumination ● Front Room Light ● No. 1 Rear Room Light Assembly ● No. 2 Rear Room Light Assembly ● Foot Light*
Door Open-linked	When any door is opened, the lights listed on the right turn ON.	
Door Close-linked	When all doors are closed, the lights listed on the right turn OFF. (The lights illuminate for approximately 15 seconds, fade out over approximately 3 seconds and go OFF. Illumination time can be selected from 15, 30, and 8 seconds using the customize function. For details, see page BE-17.)	
Door Lock-linked	When all doors are locked, the lights listed on the right turn OFF. (The lights stop illuminating, start to fade out immediately [fade out over approximately 3 seconds] and go OFF.)	
Ignition Switch-linked	When the ignition switch is changed from OFF to ACC or ON, the lights listed on the right turn OFF. (The lights stop illuminating, start to fade out immediately [fade out over approximately 3 seconds] and go OFF.)	
Battery Saving	When the following conditions are met, the lights listed on the right turn OFF: ● The ignition key is not inserted in the ignition key cylinder. ● 20 minutes have passed after any of the doors was opened.	

*: Standard equipment for the Platinum grade and optional equipment for the Limited grade.


▶ System Diagram ◀

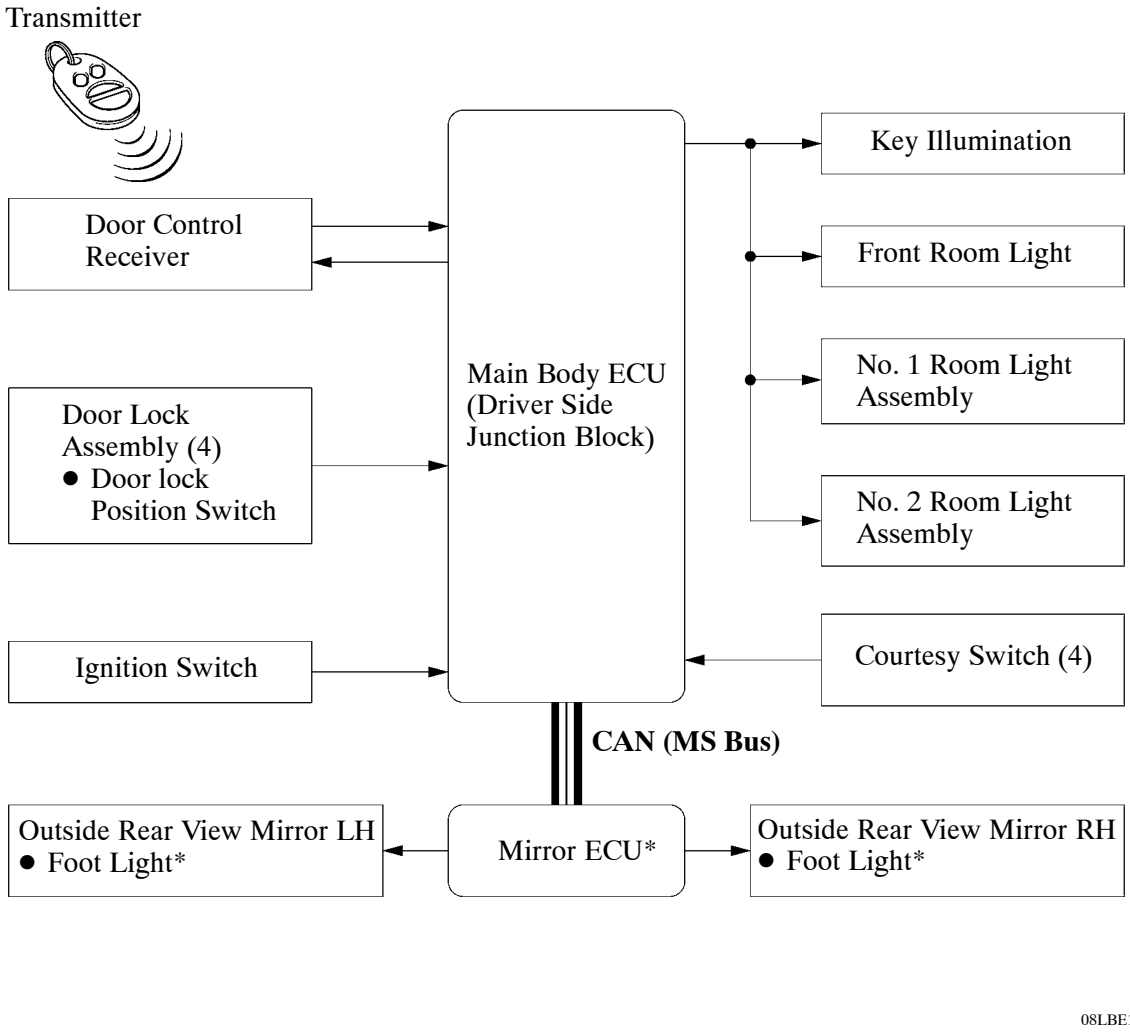

08LBE109Y

*: Standard equipment for the Platinum grade and optional equipment for the Limited grade.

2. Layout of Main Components

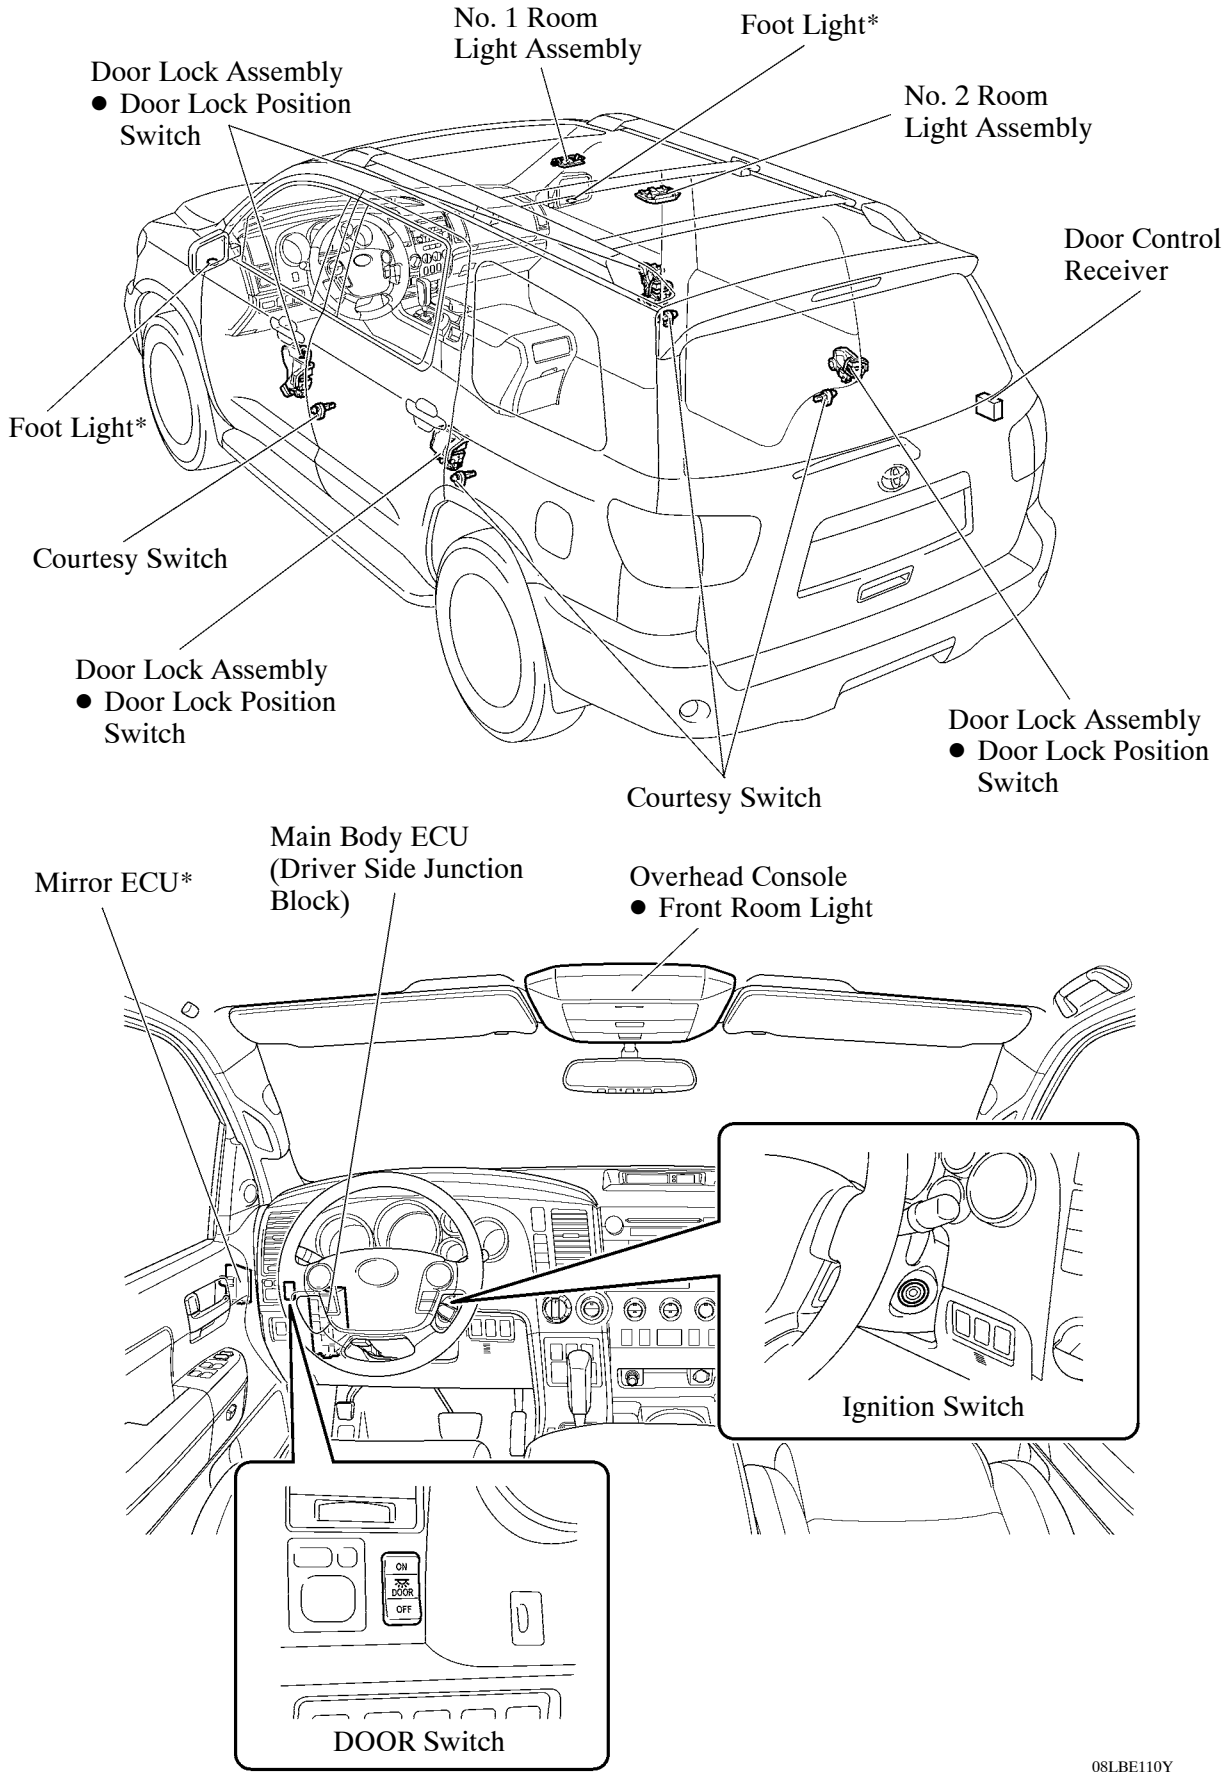

*: Standard equipment for the Platinum grade and optional equipment for the Limited grade.