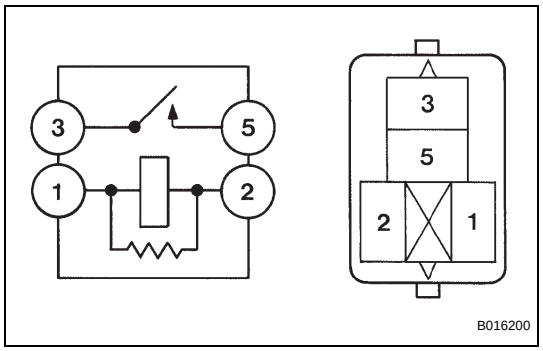


HEADLIGHT DIMMER RELAY

ON-VEHICLE INSPECTION

1. HEADLIGHT DAY DIM LIGHT RELAY

(a) Inspect relay resistance.

Resistance

Condition	Tester connection	Specified condition
Always	3 - 5	10 kΩ or higher
Apply B+ between the terminal 1 and 2	3 - 5	Below 1 Ω