

**DTC B1651/49 Open in Driver Side Knee Airbag Squib Circuit**

**DESCRIPTION**

The driver side knee airbag squib circuit consists of the center airbag sensor assembly and the driver side knee airbag assembly.

The circuit instructs the SRS to deploy when deployment conditions are met.

DTC B1651/49 is recorded when an open circuit is detected in the driver side knee airbag squib circuit.


DTC No.	DTC Detecting Condition	Trouble Area
B1651/49	<ul style="list-style-type: none"> <li>Open circuit in DK+ wire harness or DK- wire harness of driver side knee airbag squib</li> <li>Driver side knee airbag squib malfunction</li> <li>Center airbag sensor assembly malfunction</li> </ul>	<ul style="list-style-type: none"> <li>Driver side knee airbag assembly (Driver side knee airbag squib)</li> <li>Center airbag sensor assembly</li> <li>Floor wire No.2</li> </ul>

RS

**WIRING DIAGRAM**

See page RS-271.

**1 CHECK DRIVER SIDE KNEE AIRBAG ASSEMBLY (DRIVER SIDE KNEE AIRBAG SQUIB)**

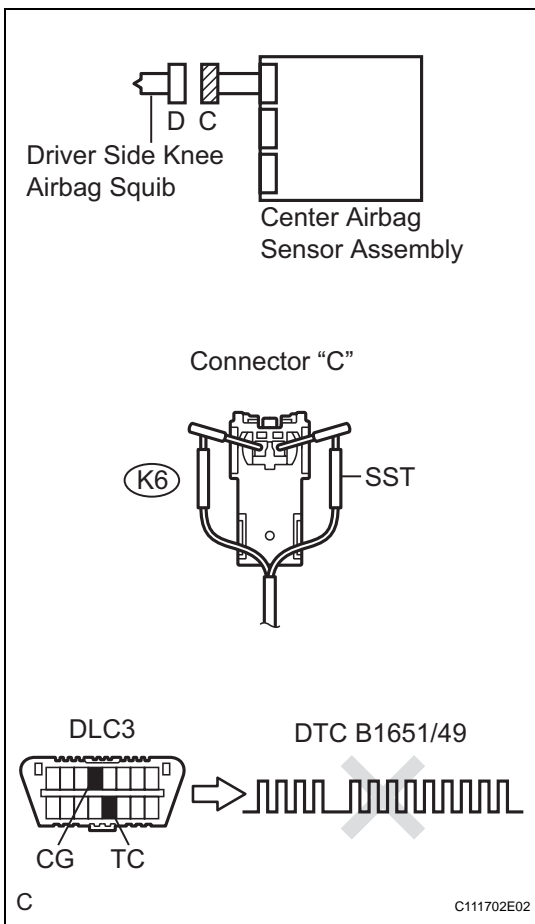

- Turn the ignition switch to the LOCK position.
- Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- Disconnect the connectors from the driver side knee airbag assembly.
- Connect the white wire side of SST (resistance 2.1 Ω) to the floor wire No.2.

**CAUTION:**

**Never connect a tester to the driver side knee airbag assembly (Driver side knee airbag squib) for measurement, as this may lead to a serious injury due to airbag deployment.**

**NOTICE:**

**Do not forcibly insert the SST into the terminals of the connector when connecting. Insert the SST straight into the terminals of the connector.**

**SST 09843-18060**

- Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Clear the DTCs stored in memory (See page RS-32).
- Turn the ignition switch to the LOCK position.
- Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- Check the DTCs (See page RS-32).

**OK:**

**DTC B1651/49 is not output.**

**HINT:**

Codes other than DTC B1651/49 may be output at this time, but they are not related to this check.


**NG** Go to step 2

**OK**

**REPLACE DRIVER SIDE KNEE AIRBAG ASSEMBLY**

**2 CHECK FLOOR WIRE NO.2 (DRIVER SIDE KNEE AIRBAG SQUIB CIRCUIT)**

**RS**

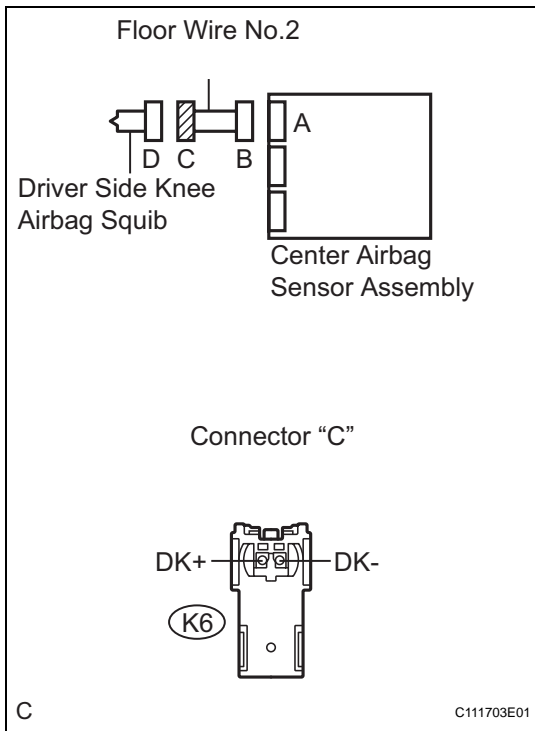

- (a) Disconnect the connector from the center airbag sensor assembly.
- (b) Measure the resistance according to the value(s) in the table below.


**Resistance**

Tester connection	Condition	Specified condition
K6-1 (DK+) - K6-2 (DK-)	Always	Below 1 Ω

**NG** REPAIR OR REPLACE FLOOR WIRE NO.2

**OK**

**3 CHECK CENTER AIRBAG SENSOR ASSEMBLY**

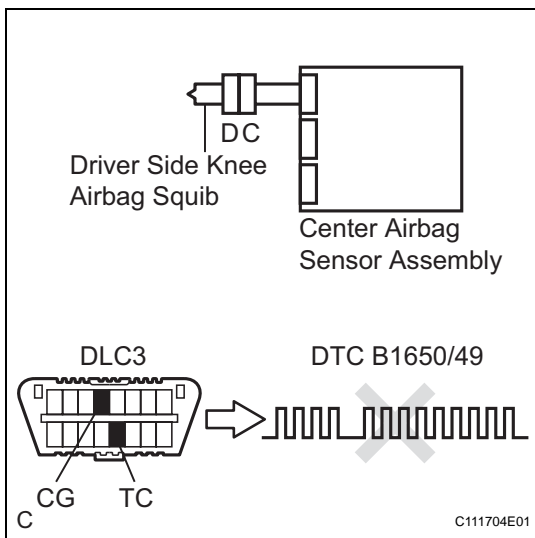

- (a) Connect the connectors to the driver side knee airbag assembly and the center airbag sensor assembly.
- (b) Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- (c) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- (d) Clear the DTCs stored in memory (See page RS-32).
- (e) Turn the ignition switch to the LOCK position.
- (f) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- (g) Check the DTCs (See page RS-32).

**OK:**

**DTC B1651/49 is not output.**

**HINT:**

Codes other than DTC B1651/49 may be output at this time, but they are not related to this check.

NG

REPLACE CENTER AIRBAG SENSOR  
ASSEMBLY

OK

USE SIMULATION METHOD TO CHECK

RS