



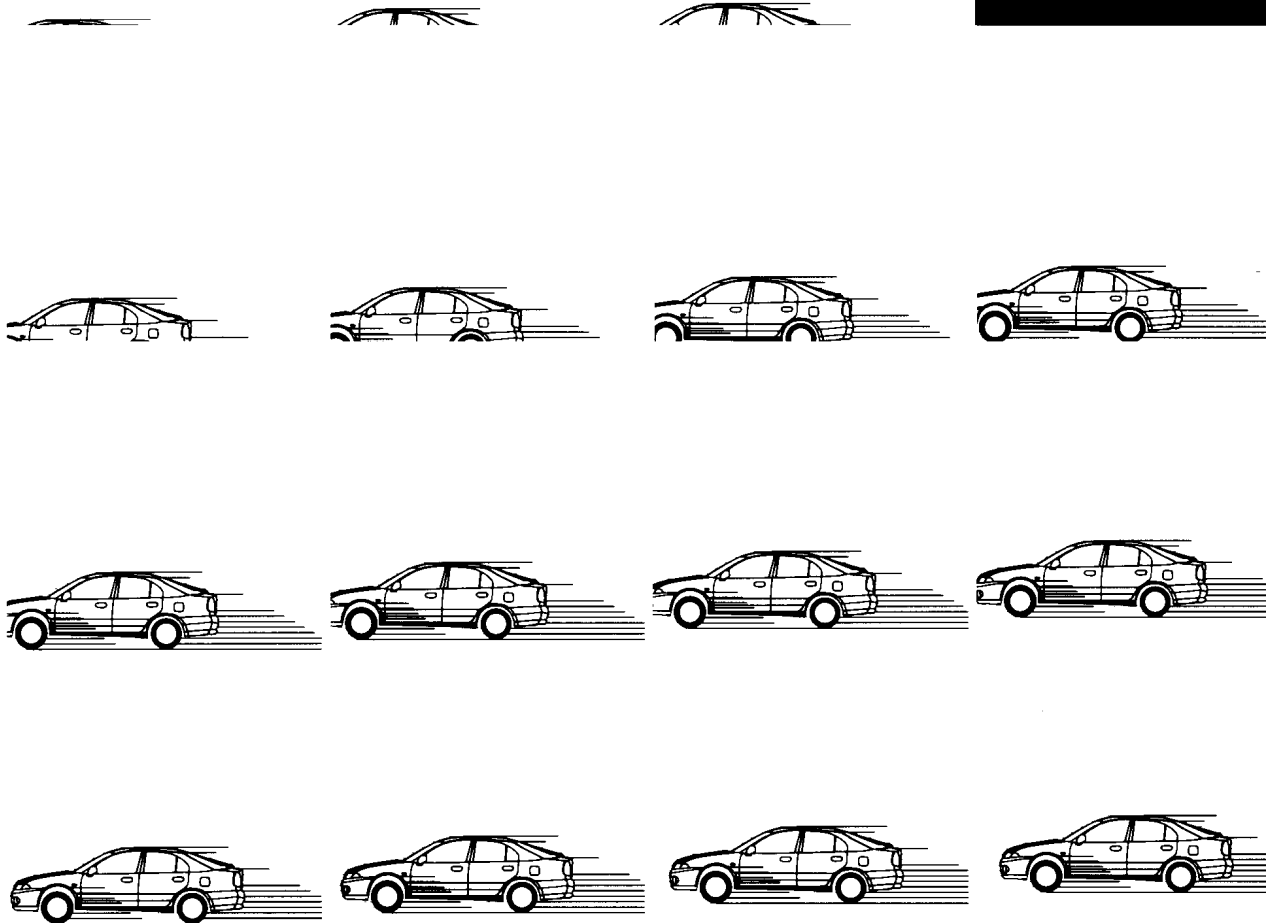

# Workshop Manual

## chassis SUPPLEMENT

# CARISMA 2001



# CARISMA

## WORKSHOP MANUAL SUPPLEMENT

### FOREWORD

This manual outlines changes in servicing procedures related to the chassis including vehicle inspections, adjustments and improvements in the newly equipped models. Use the following manuals in combination with this manual as required.

#### TECHNICAL INFORMATION MANUAL

PYGE951  
 PYGE951-A (Supplement)  
 PYGE951-B (Supplement)  
 PYGE95E1-C (Supplement)

#### WORKSHOP MANUAL CHASSIS GROUP

PWDE9502  
 PWDE9502-A (Supplement)  
 PWDE9502-B (Supplement)  
 PWDE9502-C (Supplement)  
 PWDE9502-D (Supplement)

#### ELECTRICAL WIRING

PHDE9501  
 PHDE9501-A (Supplement)  
 PHDE9501-B (Supplement)  
 PHDE9501-C (Supplement)  
 PHDE9501-D (Supplement)  
 PHDE9501-E (Supplement)

#### BODY REPAIR MANUAL

BMXE99E1

#### ENGINE GROUP

PWEE\_\_\_\_\_  
 (Looseleaf edition)

#### PARTS CATALOGUE

N606C006D□

All information, illustrations and product descriptions contained in this manual are current as at the time of publication. We, however, reserve the right to make changes at any time without prior notice or obligation.

 **MITSUBISHI MOTOR SALES**  
 Europe B.V.

"GDI" is a registered trade mark of Mitsubishi Motors Corporation.

General .....	00
Engine .....	11
Engine Lubrication .....	12
Fuel .....	13
Engine Cooling .....	14
Intake and Exhaust .....	15
Engine Electrical .....	16
Engine and Emission Control .....	17
Clutch .....	21
Manual Transmission .....	22
Automatic Transmission .....	23
Front Axle .....	26
Wheel and Tyre .....	31
Power Plant Mount .....	32
Service Brakes .....	35
Steering .....	37
Exterior .....	51
Chassis Electrical .....	54
Heater, Air Conditioner and Ventilation .....	55

## **WARNING REGARDING SERVICING OF SUPPLEMENTAL RESTRAINT SYSTEM (SRS) EQUIPPED VEHICLE**

### **WARNING!**

- (1) Improper service or maintenance of any component of the SRS, or any SRS-related component, can lead to personal injury or death to service personnel (from inadvertent firing of the air bag) or to the driver and passenger (from rendering the SRS inoperative).**
- (2) The SRS components should not be subjected to temperature of 93°C or more. So, remove the SRS-ECU, driver's and front passenger's air bag modules, clock spring, side impact sensors and front seat assemblies (side air bag modules) before drying or baking the vehicle after painting.**
- (3) Service or maintenance of any SRS component or SRS-related component must be performed only at an authorized MITSUBISHI dealer.**
- (4) MITSUBISHI dealer personnel must thoroughly review this manual, and especially its GROUP 52B - Supplemental Restraint System (SRS), before beginning any service or maintenance of any SRS component or any SRS-related component.**

### **NOTE**

Section titles with asterisks (\*) in the table of contents in each group indicate operations requiring warnings.