



ISSUED BY

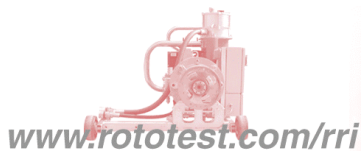

Certificate of Performance

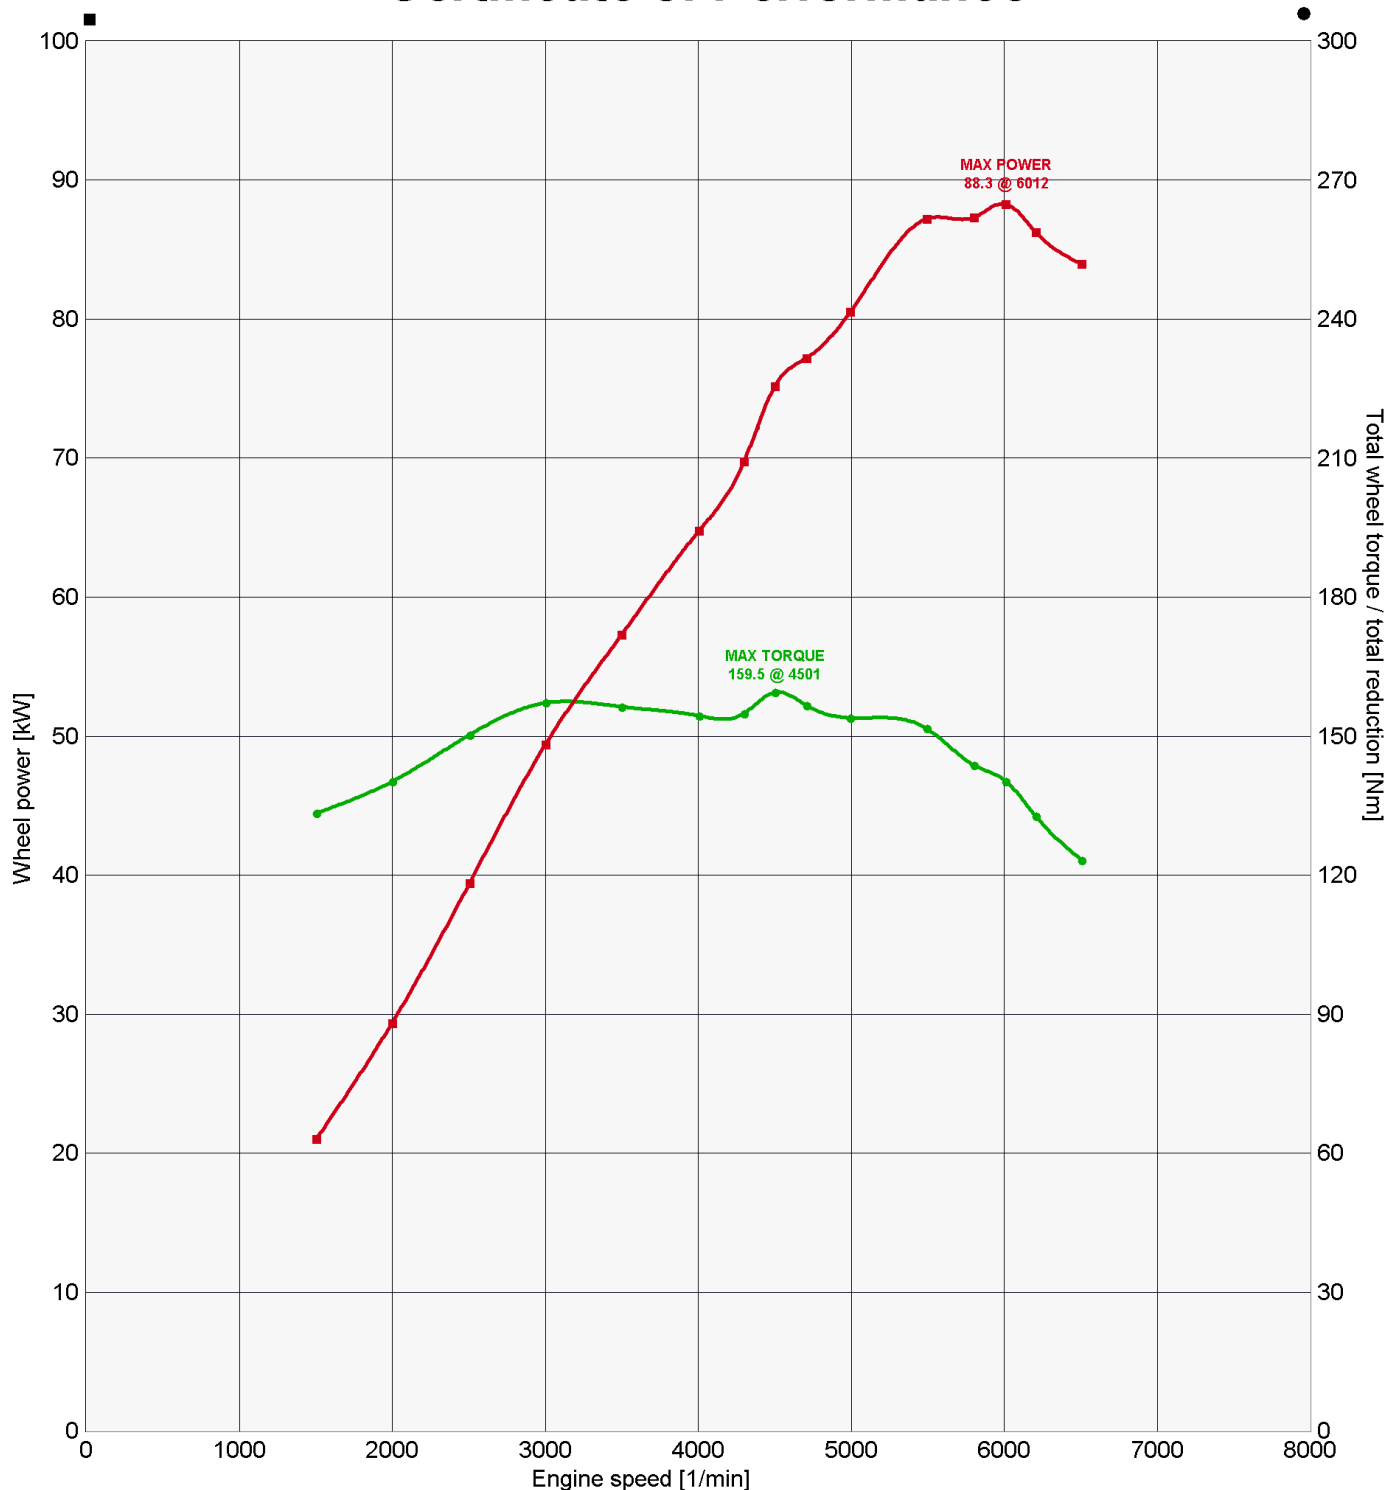

Vehicle	Description	Mode	Correction	Legend
Mitsubishi Galant 2.0 -97 (100 kW)		Steady State	ISO 1585 (5/82)	■ ●

Printed 2006-04-14 12:08

246615

ROTOTEST VPA / VPA-R chassis dynamometer system | www.rototest.com



Downloaded from www.rototest.com/rri on 2007-04-12 20:33 by 62.204.144.97

(c) Copyright Rototest Research Institute. All rights reserved. For limited non-profit use, see terms at www.rototest.com/rri. Performance graphs are available as high resolution images. Please contact RRI for more information.

ISSUED BY




Certificate of Performance

Test ID STR-97052601
Created 1997-05-19 13:20
Vehicle ID
Vehicle make Mitsubishi
Vehicle model Galant 2.0 -97 (100 kW)
Engine SI NA, 1997 cc, I4, 16v
Mileage 11840 km
Test mode Steady State
Test fuel 95 RON
Customer Description

Measured at [1/min]
Max power [kW] 88.3 6012
Max torque [Nm] 159.5 4501
Correction ISO 1585 (5/82)
Atm pressure [hPa] 1008 - 1008

Comments

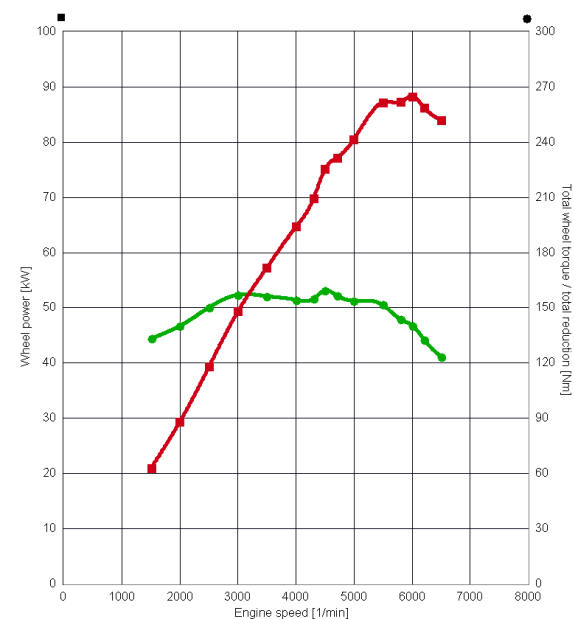

Engine speed [1/min]	Corr power [kW]	Corr torque [Nm]	Wheel speed [1/min]	Total red [1/x]	Total wheel torque [Nm]	Total wheel torque / total red [Nm]	Wheel power [kW]	Inl temp* [°C]	Rel hum [%]	Amb temp [°C]	Oil temp* [°C]	Sample Corr factor	Sample Time [s]
1505	21.0	133.4	387	3.885	526	135.3	21.3	24	33	20	97	0.986	57.3
1999	29.4	140.2	515	3.885	553	142.2	29.8	24	33	20	97	0.986	44.0
2504	39.4	150.3	645	3.885	592	152.5	40.0	24	32	20	99	0.986	32.9
3001	49.4	157.2	772	3.885	619	159.4	50.1	24	32	20	102	0.986	27.2
3498	57.3	156.4	900	3.885	615	158.3	58.0	25	30	21	106	0.988	23.0
4006	64.8	154.4	1031	3.885	606	156.0	65.5	26	29	21	112	0.989	21.0
4301	69.8	154.9	1107	3.885	608	156.6	70.5	26	29	22	114	0.990	18.5
4501	75.2	159.5	1159	3.885	625	160.8	75.8	27	28	22	116	0.992	17.9
4707	77.2	156.6	1211	3.885	614	158.0	77.9	27	27	23	119	0.992	16.2
4995	80.5	153.9	1286	3.885	604	155.6	81.4	26	26	23	122	0.990	15.7
5495	87.2	151.6	1414	3.885	594	152.9	88.0	27	25	24	124	0.992	14.3
5804	87.3	143.7	1494	3.885	562	144.6	87.9	28	25	24	128	0.994	14.1
6012	88.3	140.2	1547	3.885	548	141.1	88.8	28	24	25	128	0.994	13.8
6207	86.3	132.7	1598	3.885	518	133.3	86.6	29	24	25	133	0.996	13.9
6508	84.0	123.2	1675	3.885	482	124.0	84.5	28	24	25	135	0.994	12.7

* Inl temp measured in intake before air filter, oil temp measured in oil dipstick, unless noted otherwise.

Printed 2006-04-14 12:08

