

MIRRORS - POWER

1993 Mitsubishi Montero

1993 ACCESSORIES & EQUIPMENT
Mitsubishi Power Mirrors

Montero

DESCRIPTION & OPERATION

Electric remote control mirrors are controlled by a dual-control switch mounted on driver's door, dash or center console depending on model. Left/right switch directs current to desired mirror. Horizontal/vertical switch directs current to electric motor in mirror assembly, controlling up/down and left/right adjustment. Heated mirrors are controlled by defogger relay.

TROUBLE SHOOTING

POWER MIRRORS INOPERATIVE

Check for faulty fuse No. 5, faulty power mirror switch or faulty power mirror motor.

TESTING

POWER MIRROR MOTOR TEST

Connect 12-volt power source to mirror connector terminals. See Figs. 1 and 2. Replace mirror as necessary.



COLT, COLT 200, ECLIPSE, GALANT,
MIRAGE, MONTERO, PICKUP, RAM-50, SUMMIT,
& STEALTH & 3000GT (WITHOUT HEATER)

93H83292

Fig. 1: Identifying Power Mirror Connector
Courtesy of Mitsubishi Motor Sales of America.

Direction of operation \ Connection	Battery		Terminal		
	⊕	⊖	1	2	3
Up	○	○	○		○
Down	○	○	○		○
Left	○	○	○	○	
Right	○	○	○	○	

COLT, COLT VISTA, COLT 200, EXPO,
MIRAGE, MONTERO, SUMMIT & SUMMIT WAGON

93183293

Fig. 2: Power Mirror Operational Test Chart
Courtesy of Mitsubishi Motor Sales of America.



POWER MIRROR SWITCH TEST

Remove mirror switch. Using ohmmeter, check continuity of switch. See appropriate POWER MIRROR SWITCH CONTINUITY CHART. See Fig. 3. Replace switch as necessary if switch continuity is not as specified.

POWER MIRROR SWITCH CONTINUITY CHART

Switch Position	(1) Check Continuity Between
Left Side	
UP	Pins 4 & 8; Pins 6 & 7
DOWN	Pins 4 & 7; Pins 6 & 8
LEFT	Pins 3 & 6; Pins 4 & 7
RIGHT	Pins 3 & 4; Pins 6 & 7
Right Side	
UP	Pins 2 & 4; Pins 6 & 7
DOWN	Pins 2 & 6; Pins 4 & 7
LEFT	Pins 4 & 7; Pins 6 & 9
RIGHT	Pins 4 & 9; Pins 6 & 7

(1) - See Fig. 3.

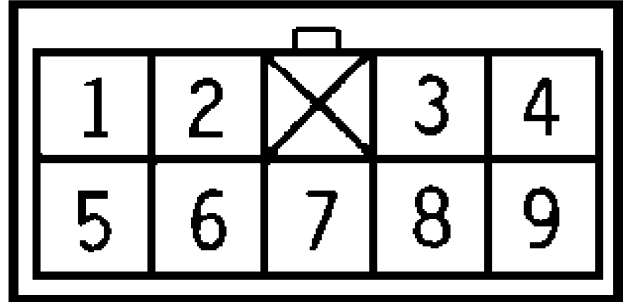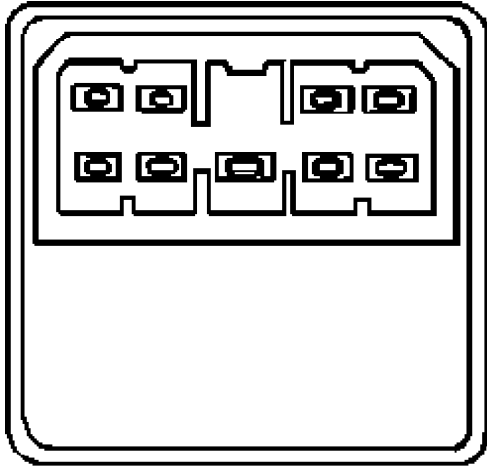

93D83298

Fig. 3: Power Mirror Switch Terminal ID
Courtesy of Mitsubishi Motor Sales of America.

REMOVAL & INSTALLATION

POWER MIRROR ASSEMBLY

Remove delta cover (trim cover), screws and electrical connector. Remove mirror assembly. To install, reverse removal procedure.

WIRING DIAGRAMS

See appropriate chassis wiring diagram in the WIRING DIAGRAMS section.