



SERVICE BULLETIN

QUALITY INFORMATION ANALYSIS
OVERSEAS SERVICE DEPT. MITSUBISHI MOTORS CORPORATION


SERVICE BULLETIN		No.: MSB-99E22-503	
		Date: 1999-07-15	
Subject:	CORRECTION TO PAINT MARKS ON M/T SHIFT AND SELECT CABLE ASSEMBLY	<Model> SPACE RUNNER (N60, N80)	<M/Y> 99-10 99-10
Group:	MANUAL TRANSAXLE	Draft No.: 99RV022515	SPACE WAGON (N60, N80)
CORRECTION	OVERSEAS SERVICE DEPT	 T.NITTA - VICE GENERAL MANAGER QUALITY INFORMATION ANALYSIS	

1. Description:

Correction has been made to the paint marks on the manual transmission shift and select cable assembly.

2. Applicable Manuals:


Manual		Pub. No.	Language	Page(s)
EUR	'99 SPACE RUNNER/WAGON Workshop Manual	PWDE9803	(English)	22-6
		PWDS9804	(Spanish)	
		PWDF9805	(French)	
		PWDG9806	(German)	
		PWDD9807	(Dutch)	
		PWDW9808	(Swedish)	

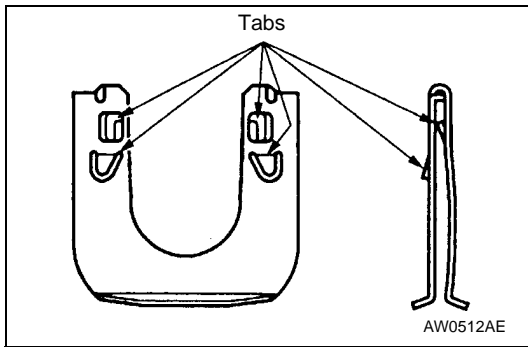

REMOVAL SERVICE POINTS

◀▶CLIP REMOVAL


Pry the tabs of the clip with a screwdriver or similar, and then remove the clip.

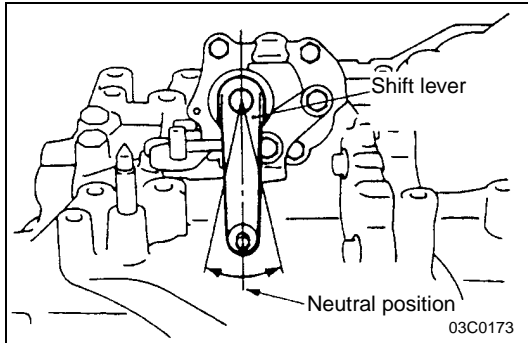

INSTALLATION SERVICE POINTS

◀▶SHIFT CABLE AND SELECT CABLE ASSEMBLY/ SHIFT CABLE CONNECTION/SELECT CABLE CONNECTION

1. Set the transmission side shift lever and the passenger compartment side shift lever to the neutral position.

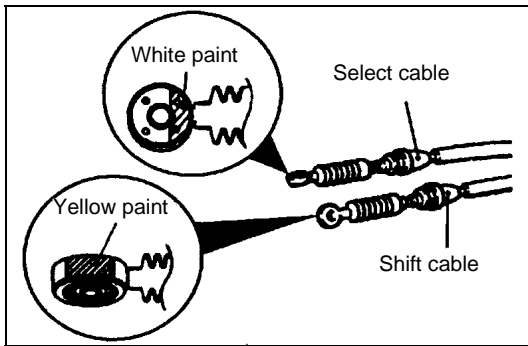

<Added>

<Incorrect>

2. For the transmission side, the paint marks on the shift and select cable ends should face the snap pins.
3. Install new clips to the cable bracket at the transmission, and then install shift cable and select cable to the cable bracket.
4. Move the passenger compartment side shift lever to all positions and check that the operation is smooth.

◀▶NUT/SPRING WASHER/SHIFT KNOB INSTALLATION

1. Screw in the nut all the way by hand, turn back half a turn, and then insert the spring washer.
2. Screw in the shift knob until it touches the spring washer, and make one more turn. Then turn more to adjust the shift pattern on the shift knob.
3. If the above steps are impossible, you can turn back the shift knob by one turn at most after screwing in all the way to adjust the shift pattern.

<Correct>

Install the transmission side shift cable with its end painted yellow toward the body top end. Install the transmission side select cable with its end painted white toward the snap pin end.