

SECTION **WT**
ROAD WHEELS & TIRES

A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P

WT

CONTENTS

PREPARATION	2	SERVICE DATA AND SPECIFICATIONS (SDS)	4	F
PREPARATION	2	SERVICE DATA AND SPECIFICATIONS (SDS)	4	G
Commercial Service Tools	2	Road Wheel	4	H
ON-VEHICLE REPAIR	3	Tire	4	H
ROAD WHEEL TIRE ASSEMBLY	3			I
Adjustment	3			J

PREPARATION


< PREPARATION >

PREPARATION

PREPARATION

Commercial Service Tools

INFOID:000000001181458

Tool name	Description
Power tool  PBIC0190E	Loosening bolts and nuts

ROAD WHEEL TIRE ASSEMBLY

< ON-VEHICLE REPAIR >

ON-VEHICLE REPAIR

ROAD WHEEL TIRE ASSEMBLY

Adjustment


INFOID:000000001181459

TIRE ROTATION

1. Follow the maintenance schedule for tire rotation service intervals. Refer to [MA-7, "General Maintenance"](#).
2. Do not include the T-type spare tire when rotating the tires.
3. When installing the wheel, tighten wheel nuts to the specified torque.

CAUTION:

- When installing wheels, tighten them diagonally by dividing the work two to three times in order to prevent the wheels from developing any distortion.
- Be careful not to tighten wheel nut at torque exceeding the criteria for preventing strain of disc rotor.
- Use NISSAN genuine wheel nuts for aluminum wheels.

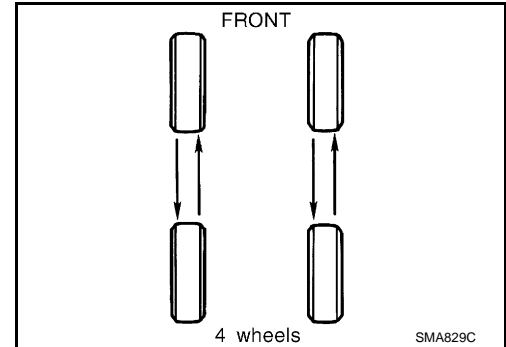

Wheel nuts tightening torque: Refer to [WT-4, "Road Wheel"](#).

SERVICE DATA AND SPECIFICATIONS (SDS)

< SERVICE DATA AND SPECIFICATIONS (SDS)

SERVICE DATA AND SPECIFICATIONS (SDS)

SERVICE DATA AND SPECIFICATIONS (SDS)

Road Wheel

INFOID:000000001181460

Kind of wheel		Aluminum	Steel	
			Conventional	For temporary use
Maximum radial runout limit	Lateral deflection	Less than 0.3 mm (0.012 in)	Less than 0.8 mm (0.031 in)	Less than 1.2 mm (0.047 in)
	Vertical deflection		Less than 0.7 mm (0.028 in)	Less than 1.3 mm (0.051 in)
Maximum allowable unbalance limit	Dynamic (At flange)	Less than 10 g (0.35 oz) (one side)		
	Static (At flange)	Less than 20 g (0.71 oz)		
Wheel nuts tightening torque		112.6 N·m (11 kg-m, 83 ft-lb)		

Tire

INFOID:000000001181461

Unit: kPa (bar, kg/cm², psi)

Tire size	Air pressure		
	Front	Rear	
215/65R16 98H	230 (2.3, 2.3, 33)	210 (2.1, 2.1, 30) ^{*1}	260 (2.6, 2.7, 38) ^{*2}
215/60R17 96H	230 (2.3, 2.3, 33)	210 (2.1, 2.1, 30) ^{*1}	260 (2.6, 2.7, 38) ^{*2}
T145/90D16 106M	420 (4.2, 4.2, 60)	420 (4.2, 4.2, 60)	420 (4.2, 4.2, 60)

*1: The passenger are 3 or less.

*2: The passenger are more than 3.