

# RESERVOIR TANK

POWER ASSISTED SYSTEM (POWER STEERING)

## 8. Reservoir Tank


### A: REMOVAL

- 1) Drain fluid from the reservoir tank.
- 2) Disconnect pipe D from return hose and suction hose from oil pump.


#### CAUTION:

- Do not allow fluid from the hose end to come into contact with pulley belt.
- To prevent foreign matter from entering the hose and pipe, cover the open ends of them with a clean cloth.

Non-TURBO model

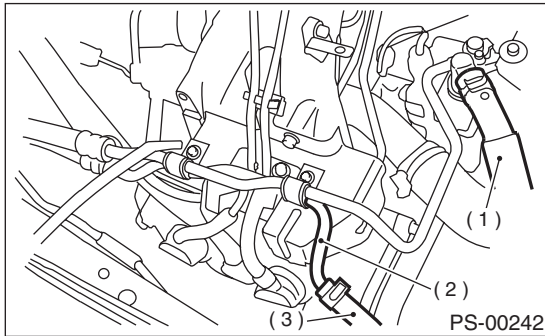

TURBO model

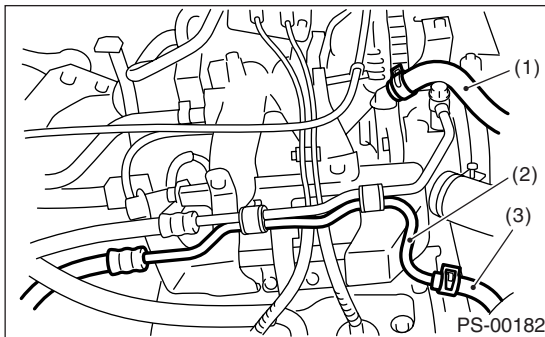


- (1) Suction hose
- (2) Pipe D
- (3) Return hose

- 3) Remove reservoir tank from bracket by pulling it upwards.


### B: INSTALLATION

- 1) Install reservoir tank to bracket.
- 2) Connect pipes D to return hose and suction hose to oil pump.

Non-TURBO model

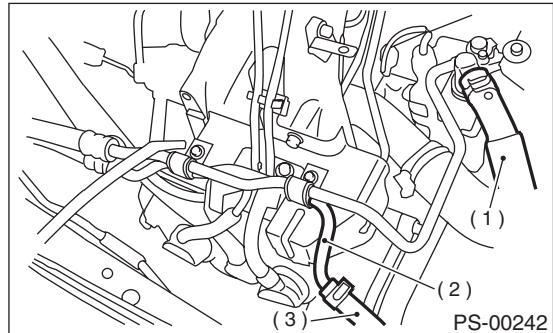

TURBO model

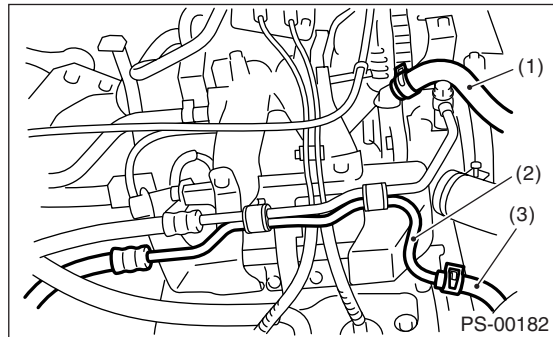

- (1) Suction hose
- (2) Pipe D
- (3) Return hose

- 3) Feed the specified power steering fluid. <Ref. to PS-59, Power Steering Fluid.>

### C: INSPECTION

Check reservoir tank for cracks, breakage, or damage. If any cracks, breakage, or damage is found, replace reservoir tank.