


15. Roof Rail

A: REMOVAL

CAUTION:

When removing roof rail, use great care not to damage body panel by stud bolt.

- 1) Remove cargo bed upper molding. <Ref. to EI-49, REMOVAL, Cargo Bed Upper Molding.>
- 2) Remove roof trim. <Ref. to EI-44, REMOVAL, Roof Trim.>
- 3) Remove five nuts and roof rail.
- 4) Remove roof molding.

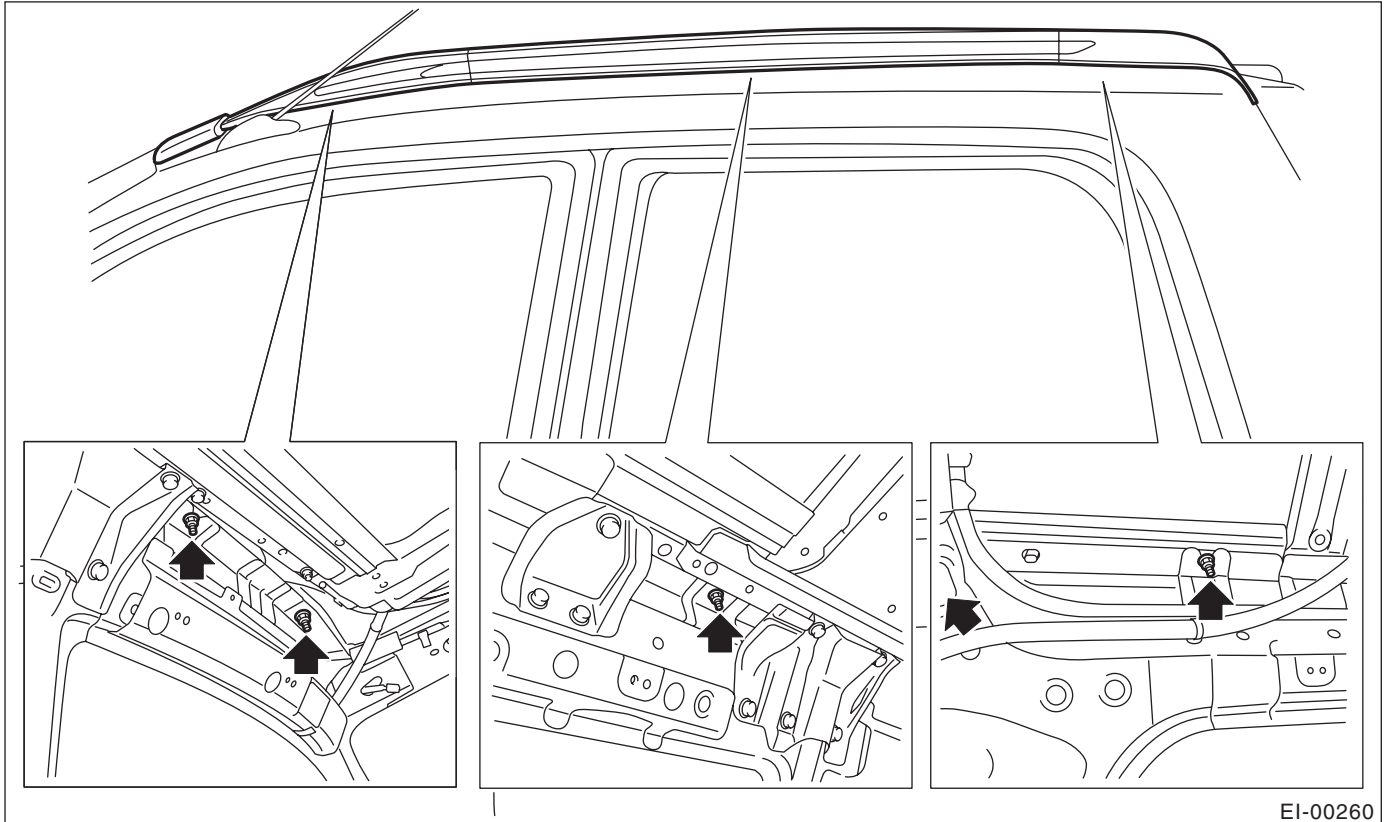

EI-00260

B: INSTALLATION

Install in the reverse order of removal.

CAUTION:

Be careful not to scratch body panels with roof rail stud bolts when installing them.