
Interior equipment


Sun visors Vanity mirror (if equipped)	
Storage compartment	
Glove compartment	• • •
Sunglasses storage compartment	• •
Dashboard storage compartment	
Door storage compartment	
Coin tray	
Cup holder	
Driver's cup holder	
Front passenger's cup holder	
Rear passenger's cup holder	
Clock	
Setting the clock	
Accessory power socket	
Front accessory power socket (if equipped)	
Rear accessory power socket	
Cigarette lighter (if equipped)	
Ashtray (if equipped)	
Front ashtray	
Rear ashtray	
Coat hook	
Interior light	
Spotlight	
Luggage area light	
Luggage cover (if equipped)	
Using the cover	
To remove the cover	
To install the cover	
Cargo anchorage eyelets	
Luggage floor storage tray	
Front, left and right sides storage tray	
Center storage tray	
Maintenance tools	

Sun visors



To block out glare, swing down the visors. To use the sun visor at a side window, swing it down and move it sideways.

■ Vanity mirror (if equipped)




To use the vanity mirror, swing down the visor and open the cover.

Storage compartment

- Always keep the storage compartment closed while driving to reduce the risk of injury in the event of sudden stops or an accident.
- Do not store spray cans, containers with flammable or corrosive liquids or any other dangerous items in the storage compartment.


■ Glove compartment



To open the glove compartment, pull the handle. To close it, push the lid firmly upward.


To lock the glove compartment, insert the master key and turn it clockwise. To unlock it, insert the masterkey and turn it counterclockwise.

■ Center console



To open the lid, pull up the lock release.


■ Sunglasses storage compartment

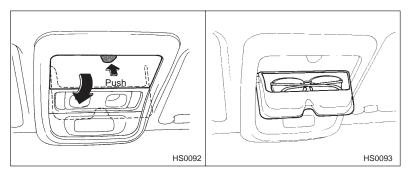

The sunglasses storage compartment can be used to store a pair of sunglasses or small items such as a garage door opener.


To open the compartment, push the button and it will automatically open.

■ Dashboard storage compartment




To open the dashboard compartment, push the button and pull up on the lid. Be sure to close the compartment fully before driving.

■ Door storage compartment



Each door is equipped with a door storage compartment. To open the compartment, push the button and pull up on the lid.

■ Coin tray




To open the coin tray, pull the upper edge of the lid.

Cup holder




- When not in use, always keep the holder stored while driving to reduce the risk of injury in the event of a sudden stop or an accident.
- Do not pick up a cup from the cup holder or put a cup in the holder while you are driving, as this may distract you and lead to an accident.
- Take care to avoid spills. Beverages, if hot, might burn you or your passengers. Spilled beverages may also damage upholstery, carpets or audio equipment.

■ Driver's cup holder

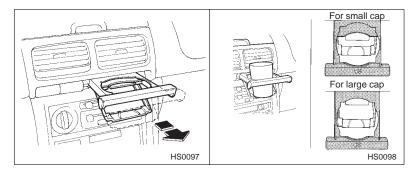


To use the cup holder, pull it out to the first click stop. If you want to use a larger cup, pull it out farther until it stops.

Front passenger's cup holder

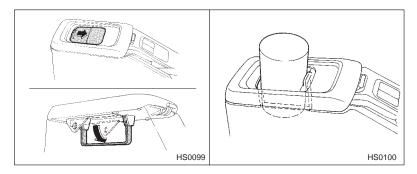


The front passenger's cup holder is built in the lid of the center console. To use the cup holder, open the lid by sliding it forward and unfold the arm. Adjust the opening area by sliding the lid forward or rearward to fit the cup. When not in use, fold the arm and close the lid.

■ Rear passenger's cup holder

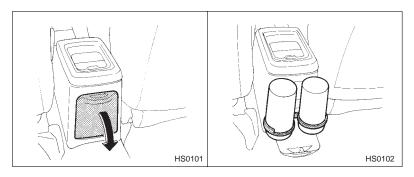

The rear passenger's cup holder is located at the back of the center console. To use the cup holder, open the lid by pulling its upper edge.

Clock



The clock displays the time when the ignition switch is in the "ACC" or "ON" positions.

■ Setting the clock

To set the hour, press the "H" button. To set the minutes, press the "M" button. To reset the minutes to "00" with a radio time signal, push the "S" button.

Accessory power socket


⚠ CAUTION

- Do not attempt to use a cigarette lighter in the accessory socket.
- Do not place any foreign objects, especially metal ones such as coins or aluminum foil, into the accessory socket. That could cause a short circuit. Always put the cap on the accessory socket when it is not in use.
- Use only electrical appliances which are designed for 12V DC and which consume less than 120W. Overloading the accessory socket can cause a short circuit. Do not use double adapters or more than one electrical appliance.
- If the plug on your electric appliance is either too loose or too tight for the accessory socket, this can result in a poor contact or cause the plug to get stuck. Only use plugs that fit properly in the accessory socket.
- Use of an electric appliance in the accessory socket for a long period of time while the engine is not running can cause battery discharge.
- Before driving your vehicle, make sure that the plug and the cord on your electrical appliance will not interfere with your shifting gears and operating the accelerator and brake pedals. If they do, do not use the electrical appliance while driving.

Electrical power (12V DC) from the battery is on tap at the socket when the ignition switch is either in the "ACC" or "ON" position.


You can use an in-car use electrical appliance by connecting it to the socket.

■ Front accessory socket (if equipped)



The front accessory socket is located on the lower part of the instrument panel.

■ Rear accessory socket



The rear accessory socket is located on the right side of the luggage compartment.

Cigarette lighter (if quipped)




∕!\ WARNING

To avoid being burned, never grasp the lighter by the end with the heating element. Doing so could result in injury and could also damage the heating element.

⚠ CAUTION

- Do not hold the lighter pushed in, because it will overheat.
- If the lighter is replaced, it is best to use only a genuine SUBARU part. The use of parts that are not SUBARU-made may result in a short circuit and overheating.
- Avoid the use of "plug-in" type accessories (spot-lights, shavers, etc.). Such accessories may damage the socket.



The cigarette lighter operates only when the ignition switch is in the "ON" and "ACC" position.


To use the cigarette lighter, push in the knob and wait a few moments. It will automatically spring up when ready for use.

Ashtray (if equipped)



Do not use ashtrays as waste receptacles or leave a lighted cigarette in an ashtray. This could cause a fire.

Fully close the ashtray after using it to help reduce residual smoke.

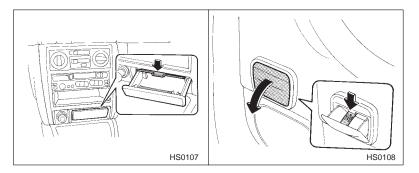

■ Front ashtray

To open the ashtray, pull the lid out.

To remove the ashtray for cleaning, open it and pull it out while pushing the inner plate down.

■ Rear ashtray

To open the ashtray, pull the upper edge of the lid.


To remove the ashtray for cleaning, open it and pull it out while pushing the inner plate down.

Coat hook




Never hang anything on the coat hook that might obstruct the driver's view. And do not hang items on the coat hook that weight 1 kg (2.2 lb) or more.

The coat hook is attached to the rear passenger's hand grip behind the driver.



Interior light



The interior light switch has three positions:

ON: The light stays on continuously.


Middle position: The light comes on when any door is opened and

stays on for a few seconds after all doors are closed.

OFF: The light stays off.

When leaving your vehicle, make sure the light is turned off to avoid battery discharge.


Spotlight



To turn on the spotlight, push the switch. To turn it off, push the switch again.

When leaving the vehicle, make sure the light is turned off to avoid battery discharge.

Luggage area light



The luggage area light switch has three positions:

ON: The light stays on continuously.

DOOR: The light comes on only when the rear gate is opened.

OFF: The light stays off.

When leaving your vehicle, make sure the light is turned off to avoid battery discharge.

Luggage cover (if equipped)




/!\ CAUTION

Do not place anything on the extended cover. Putting excessive weight on the extended cover can break it and an object on the cover could tumble forward in the event of a sudden stop or collision. This could cause serious injury.


The luggage cover is provided for covering the luggage compartment and to protect its contents from direct sunlight. This cover is detachable to make room for additional cargo.

Using the cover



To extend the cover, pull the end of the cover out of the cover housing, then insert its hooks into the catches as shown. To rewind it, unhook it from the catches and it will rewind automatically. You should hold on to the cover and guide it back into the cover housing while it is rewinding.

■ To remove the cover



- 1. Rewind the cover.
- $2. \ \ \mbox{Remove}$ the fastening straps of the cover from the pillows.
- 3. To take it off the retainer, lift it out.
- 4. Store the cover housing in the luggage area.

■ To install the cover


- 1. Insert the both ends of the cover housing into the retainers.
- 2. Attach the fastening straps to the pillows.

The cover can be installed in either of two positions.

Cargo anchorage eyelets



The cargo anchorage eyelets are designed only for securing light luggage. Never try to secure any luggage which weighs more than the load capacity of the anchorage eyelets. The maximum load capacity is about 44 lb. (20 kg) per eyelet.




The luggage compartment is equipped with four anchorage eyelets so that luggage can be secured with a luggage net or ropes.

When using the anchorage eyelets, raise them up. When not in use, lower the eyelets down.

Luggage floor storage tray


A CAUTION

- Always keep the lid of the storage tray closed while driving to reduce the risk of injury in the event of sudden stops or an accident.
- Do not store spray cans, containers with flammable or corrosive liquids or any other dangerous items in the storage tray.




There are four storage trays under the floor of the luggage compartment. They can be used to store small items.

■ Front, left and right side storage tray

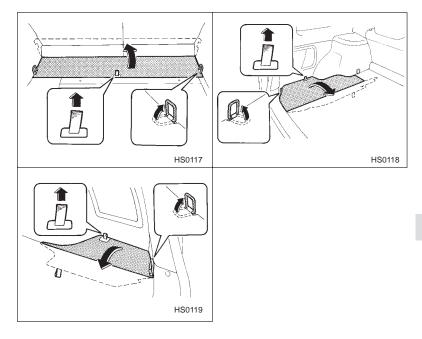


To open the lid, raise the cargo anchorage eyelets and pull the tab up. The jack and jack handle are stored in the left side storage tray.

■ Center storage tray

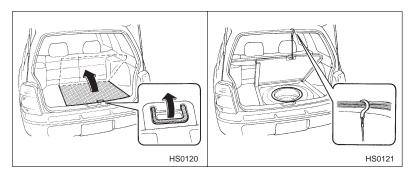

To open the lid, pull the handle up. To keep the lid open, hang the hook provided on the backside of the lid on the rear edge of the roof. The spare tire is stored under the storage tray.

Maintenance tools



Your vehicle is equipped with the following maintenance tools:

Screwdriver

Wheel nut wrench