Important safety notice

- Providing appropriate service and repair is a matter of great importance in the serviceman's safety maintenance and safe operation, function and performance which the SUBARU vehicle possesses.
- In case the replacement of parts or replenishment of consumables is required, genuine SUBARU parts whose parts numbers are designated or their equivalents must be utilized.
- It must be made well known that the safety of the serviceman and the safe operation of the vehicle would be
 jeopardized if he used any service parts, consumables, special tools and work procedure manuals which are
 not approved or designated by SUBARU.

All right reserved. This book may not be reproduced or copied, in whole or in part, without the written permission of FUJI HEAVY INDUSTRIES LTD., TOKYO JAPAN.

SUBARU, and are trademarks of FUJI HEAVY INDUSTRIES LTD.

© Copyright 1996 FUJI HEAVY INDUSTRIES LTD.


1. General Description


1. General Description

1. HOW TO USE THIS MANUAL

The description of the electrical system is divided into the charging system, starting system, etc.

- 1) First, open to the necessary electrical system section and wiring diagram.
- 2) Next, open the foldout page of the electrical wiring diagram. By observing the electrical wiring harness' illustrations (front, instrument panel, etc.), the wiring diagram connector can be located.

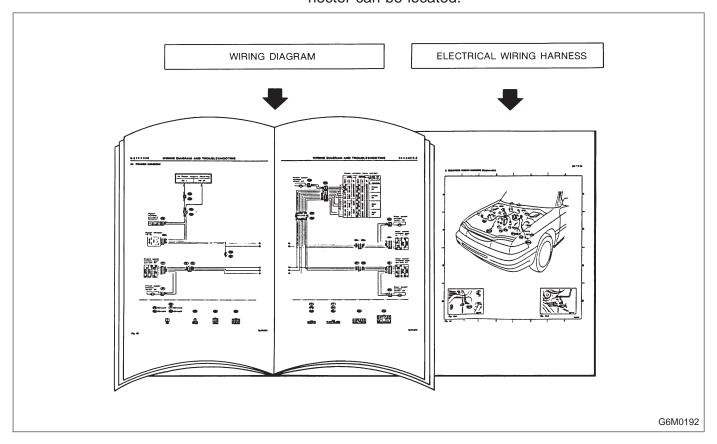

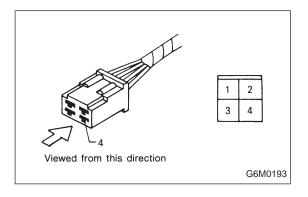


2. WIRING DIAGRAM


The wiring diagram of each system is illustrated so that you can understand the path through which the electric current flows from the battery.

Sketches and codes are used in the diagrams. They should read as follows:

1) Each connector and its terminal position are indicated by a sketch of the connector in a disconnected state which is viewed from the front, as shown in figure. 2) The number of poles or pins, presence of a lock, and pin number of each terminal are indicated in the sketch of each connector.

In the sketch, the highest pole number refers to the number of poles which the connector has. For example, the sketch of the connector shown in figure indicates the connector has 9 poles.

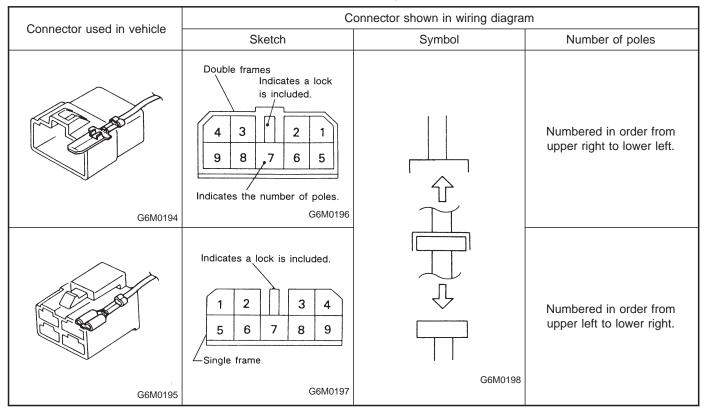


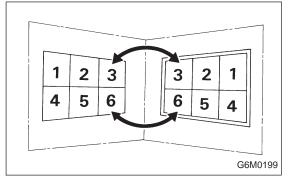

When one set of connectors is viewed from the front side, the pole numbers of one connector are symmetrical to those of the other. When these two connectors are connected as a unit, the poles which have the same number are joined.

3) Electrical wiring harness


The connectors are numbered along with the number of poles, external colors, and mating connections in the accompanying list.

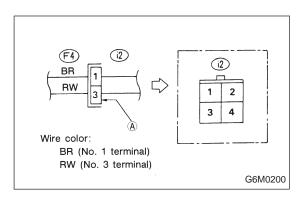


4) The sketch of each connector in the wiring diagram usually shows the "A" side of the connector. The relationship between the wire color, terminal number and connector is described in figure.

NOTE:

A wire which runs in one direction from a connector terminal sometimes may have a different color from that which runs in the other direction from that terminal.

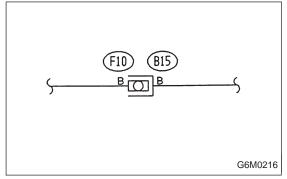


5) In wiring diagram, connectors which have no terminal number refer to one-pole types. Sketches of these connectors are omitted intentionally.

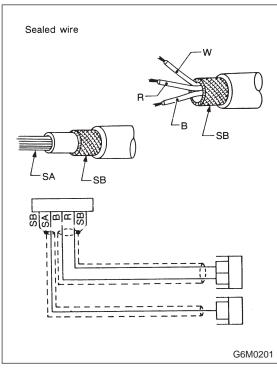

6) The following color codes are used to indicate the colors of the wires used.

Color code	Color
L	Blue
В	Black
Y	Yellow
G	Green
R	Red
W	White
Br	Brown
Lg	Light green
Gr	Gray
P	Pink
Or	Orange
Lb	Light Blue
V	Violet
SA	Sealed (Inner)
SB	Sealed (Outer)

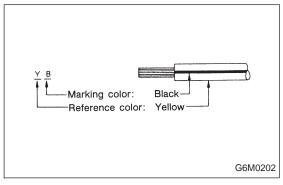

7) The wire color code, which consists of two letters (or three letters including Br or Lg), indicates the standard color (base color of the wire covering) by its first letter and the stripe marking by its second letter.

8) The table below lists the nominal sectional areas and allowable currents of the wires.


Nominal sectional area mm²	No. of strands/ strand diameter	Outside diameter of finished wiring mm	Allowable current Amps/40°C
0.3	7/0.26	1.8	7
0.5	7/0.32	2.2 (or 2.0)	12
0.75	30/0.18	2.6 (or 2.4)	16
0.85	11/0.32	2.4 (or 2.2)	16
1.25	16/0.32	2.7 (or 2.5)	21
2	26/0.32	3.1 (or 2.9)	28
3	41/0.32	3.8 (or 3.6)	38
5	65/0.32	4.6 (or 4.4)	51
8	50/0.45	5.5	67

CAUTION:

When replacing or repairing a wire, be sure to use the same size and type of the wire which was originally used.

NOTE:

- The allowable current in the above table indicates the tolerable amperage of each wire at an ambient temperature of 40°C (104°F).
- The allowable current changes with ambient temperature. Also, it changes if a bundle of more than two wires is used.

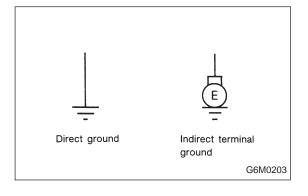

9) Each unit is directly grounded to the body or indirectly grounds through a harness ground terminal. Different symbols are used in the wiring diagram to identify the two grounding systems.

The ground points shown in the wiring diagram refer to the following:

- (GB) Body ground
- GE Engine ground
- GR Radio ground
- GD Rear defogger ground


All wiring harnesses are provided with a ground point which should be securely connected.

1. General Description

10) Relays are classified as normally-open or normallyclosed.

The normally-closed relay has one or more contacts.


The wiring diagram shows the relay mode when the energizing circuit is OFF.

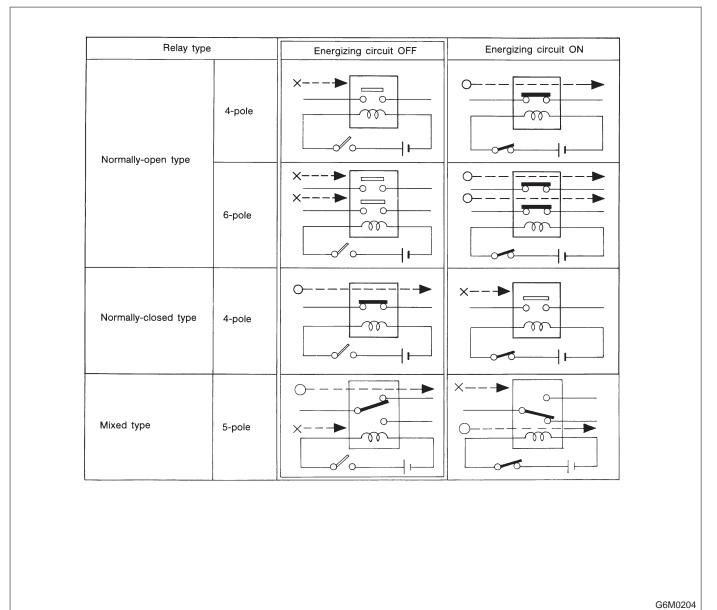

Key to symbols:

○ →: Current flows.X →: Current does not flow.

WIRING DIAGRAM

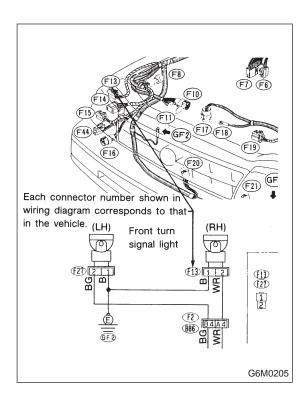

11) Each connector number shown in the wiring diagram corresponds to that in the wiring harness. The location of each connector in the actual vehicle is determined by reading the first character of the connector (for example, a "F" for F8, "i" for i16, etc.) and the type of wiring harness. The first character of each connector number refers to the area or system of the vehicle, as indicated in table below.

Symbol	Wiring harness and Cord
F	Front wiring harness
В	Bulkhead wiring harness
E	Engine wiring harness
Т	Transmission cord
D	Door cord LH & RH, Rear gate cord
I	Instrument panel wiring harness
R	Rear wiring harness, Rear defogger cord Room light cord, Fuel tank cord, Sunroof cord, Trunk lid cord
Р	Floor wiring harness

2. Basic Diagnostics Procedures

The most important purpose of diagnostics is to determine which part is malfunctioning quickly, to save time and labor.

A: IDENTIFICATION OF TROUBLE SYMPTOM

Determine what the problem is based on the symptom.

B: PROBABLE CAUSE OF TROUBLE


Look at the wiring diagram and check the system's circuit. Then check the switch, relay, fuse, ground, etc.

C: LOCATION AND REPAIR OF TROUBLE

- 1) Using the diagnostics narrow down the causes.
- 2) If necessary, use a voltmeter, ohmmeter, etc.
- 3) Before replacing certain component parts (switch, relay, etc.), check the power supply, ground, for open wiring harness, poor connectors, etc. If no problems are encountered, check the component parts.

D: CONFIRMATION OF SYSTEM OPERATION

After repairing, ensure that the system operates properly.

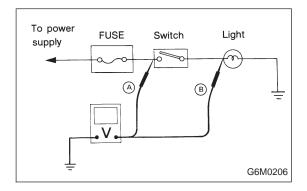

E: INSPECTION

1. VOLTAGE MEASUREMENT

- 1) Using a voltmeter, connect the negative lead to a good ground point or negative battery terminal and the positive lead to the connector or component terminal.
- 2) Contact the positive probe of the voltmeter on connector (A).


The voltmeter will indicate a voltage.

3) Shift the positive probe to connector (B). The voltmeter will indicate no voltage.

With test set-up held as it is, turn switch ON. The voltmeter will indicate a voltage and, at the same time, the light will come on.

4) The circuit is in good order. If a problem such as a lamp failing to light occurs, use the procedures outlined above to track down the malfunction.

WIRING DIAGRAM 2. Basic Diagnostics Procedures

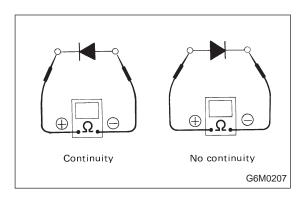

2. CIRCUIT CONTINUITY CHECKS

1) Disconnect the battery terminal or connector so there is no voltage between the check points.

Contact the two leads of an ohmmeter to each of the check points.

If the circuit has diodes, reverse the two leads and check again.


2) Use an ohmmeter to check for diode continuity.


When contacting the negative lead to the diode positive side and the positive lead to the negative side, there should be continuity.


When contacting the two leads in reverse, there should be no continuity.


3) Symbol "o—o" indicates that continuity exists between two points or terminals. For example, when a switch position is "3", continuity exists among terminals 1, 3 and 6, as shown in table below.

Terminal	1	2	3	4	5	6
Switch Position	I		3	4	5	0
OFF						
1	<u> </u>					<u> </u>
2	<u> </u>			- 0-		<u> </u>
3	0-		<u> </u>			—
4	0	-0-				—

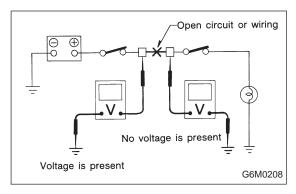

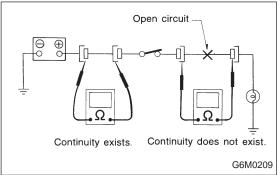

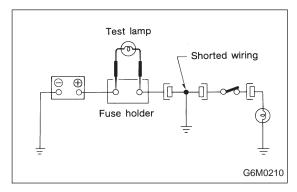

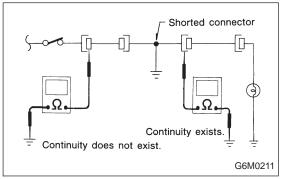

3. HOW TO DETERMINE AN OPEN CIRCUIT

1) Voltmeter method

An open circuit is determined by measuring the voltage between respective connectors and ground using a voltmeter, starting with the connector closest to the power supply. The power supply must be turned ON so that current flows in the circuit. If voltage is not present between a particular connector and ground, the circuit between that connector and the previous connector is open.

2) Ohmmeter method

Disconnect all connectors affected, and check continuity in the wiring between adjacent connectors. When the ohmmeter indicates "infinite", the wiring is open.

4. HOW TO DETERMINE A SHORT-CIRCUIT

1) Test lamp method

Connect a test lamp (rated at approximately 3 watts) in place of the blown fuse and allow current to flow through the circuit. Disconnect one connector at a time from the circuit, starting with the one located farthest from the power supply. If the test lamp goes out when a connector is disconnected, the wiring between that connection and the next connector (farther from the power supply) is shorted.

2) Ohmmeter method

Disconnect all affected connectors, and check continuity between each connector and ground. When ohmmeter indicates continuity between a particular connector and ground, that connector is shorted.


3. Working Precautions

1. PRECAUTIONS WHEN WORKING WITH THE PARTS MOUNTED ON THE VEHICLE


- 1) When working under a vehicle which is jacked-up, always be sure to use safety stands.
- 2) The parking brake must always be applied during working. Also, in automatic transmission vehicles, keep the select lever set to the P (Parking) range.
- 3) Be sure the workshop is properly ventilated when running the engine. Further, be careful not to touch the belt or fan while the engine is operating.
- 4) Be careful not to touch hot metal parts, especially the radiator and exhaust system immediately after the engine has been shut off.

2. PRECAUTIONS IN TROUBLE DIAGNOSIS AND REPAIR OF ELECTRIC PARTS

- 1) The battery cable must be disconnected from the battery's (–) terminal, and the ignition switch must be set to the OFF position, unless otherwise required by the diagnostics.
- 2) Securely fasten the wiring harness with clamps and slips so that the harness does not interfere with the body end parts or edges and bolts or screws.
- 3) When installing parts, be careful not to catch them on the wiring harness.

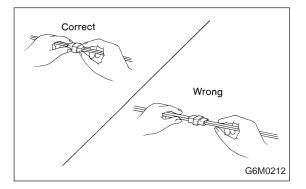


4) When disconnecting a connector, do not pull the wires, but pull while holding the connector body.

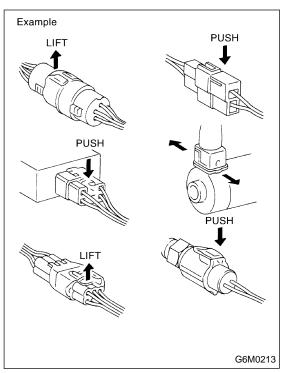

5) Some connectors are provided with a lock. One type of such a connector is disconnected by pushing the lock, and the other, by moving the lock up. In either type the lock shape must be identified before attempting to disconnect the connector.

To connect, insert the connector until it snaps and confirm that it is tightly connected.

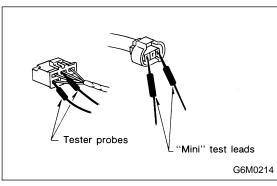


6) When checking continuity between connector terminals, or measuring voltage across the terminal and ground, always contact tester probe(s) on terminals from the wiring connection side. If the probe is too thick to gain access to the terminal, use "mini" test leads.

To check water-proof connectors (which are not accessible from the wiring side), contact test probes on the terminal side being careful not to bend or damage the terminals.

7) Sensors, relays, electrical unit, etc., are sensitive to strong impacts.

Handle them with care so that they are not dropped or mishandled.

4. How to Use Wiring Diagram

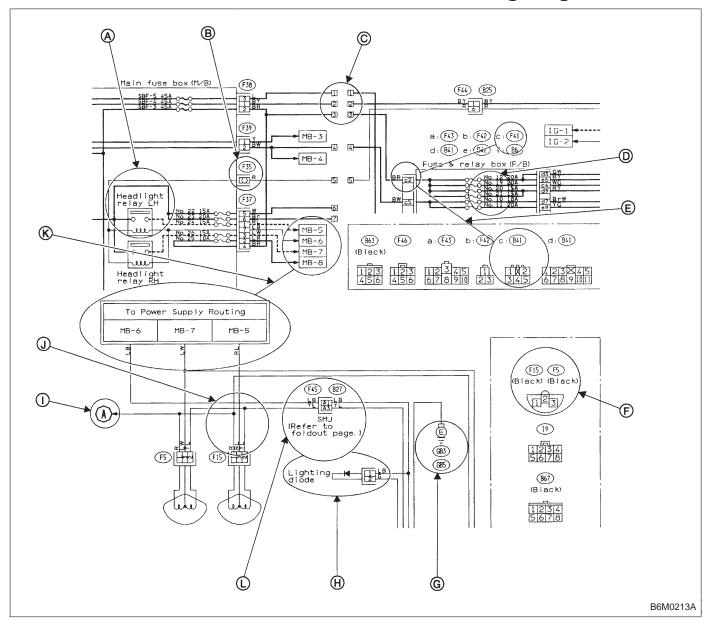

A: RELAY

A symbol used to indicate a relay.

B: CONNECTOR-1

The sketch of the connector indicates the onepole types.

C: WIRING CONNECTION

Some wiring diagrams are indicated in foldouts for convenience. Wiring destinations are indicated where necessary by corresponding symbols (as when two pages are needed for clear indication).

D: FUSE No. & RATING

The "FUSE No. & RATING" corresponds that used in the fuse box (main fuse box, and joint box).

E: CONNECTOR-2

- 1. Each connector is indicated by a symbol.
- 2. Each terminal number is indicated in the corresponding wiring diagram in an abbreviated form.
- 3. For example, terminal number "C2" refers to No. 2 terminal of connector (C:F41) shown in the connector sketch.

F: CONNECTOR SKETCH

- Each connector sketch clearly identifies the shape and color of a connector as well as terminal locations. Non-colored connectors are indicated in natural color.
- When more than two types of connector number are indicated in a connector sketch, it means that the same type connectors are used.

G: GROUND

Each grounding point can be located easily by referring to the corresponding wiring harness.

H: DIODE

A symbol is used to indicate a diode.

I: WIRE TRACING ON EXTENDED WIRING DIAGRAMS

For a wiring diagram extending over at least two pages, a symbol (consisting of the same characters with arrows), as shown below, facilitates wire tracing from one page to the next.

 $A \leftrightarrow A, B \leftrightarrow B$

J: SYMBOLS OF WIRE CONNECTION AND CROSSING

Symbol Refers to wires which are connected and branched

at the "dot" point.

Symbol Refers to wires which are crossed but not con-

nected.

K: POWER SUPPLY ROUTING

A symbol is used to indicate the power supply in each wiring diagram.

"MB-5", "MB-6", etc., which are used as power supply symbols throughout the text, correspond with those shown in the POWER SUPPLY ROUTING in the wiring diagram.

Accordingly, using the POWER SUPPLY ROUT-ING and wiring diagrams permits service personnel to understand the entire electrical arrangement of a system.

L: S.M.J.

A symbol is used to indicate the terminal arrangement of the super multiple junction. The S.M.J. is not shown in respective wiring diagrams but is indicated on the next page.

SYMBOLS AND ABBREVIATIONS


A number of symbols and abbreviations are used in each wiring diagram to easily identify parts or circuits.

5. How to Use Super Multiple Junction (S.M.J.)


The "S.M.J." indicated in wiring diagrams is shown in a simplified form.

TERMINAL ARRANGEMENT


LHD model

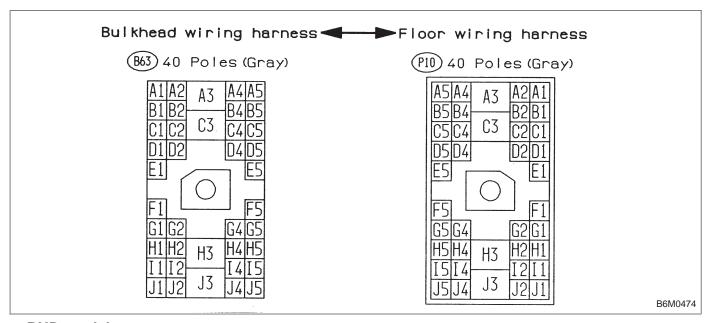

RHD model

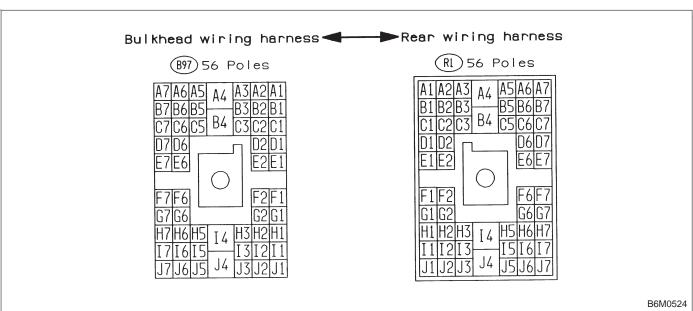

INSTALLATION

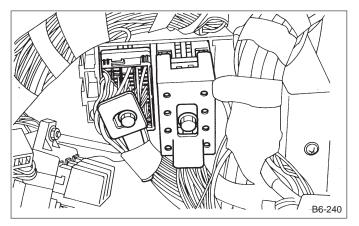


Tightening torque: 4.4 — 7.4 № m (45 — 75 kg-cm, 39 — 65 in-lb)

NOTE:

- Align the cutout portion of one connector with that of other before tightening the connecting bolt.
- Do not tighten the bolt excessively since this may deform the connectors.

EXPLANATION OF S.M.J. SHOWN IN THE WIRING DIAGRAM

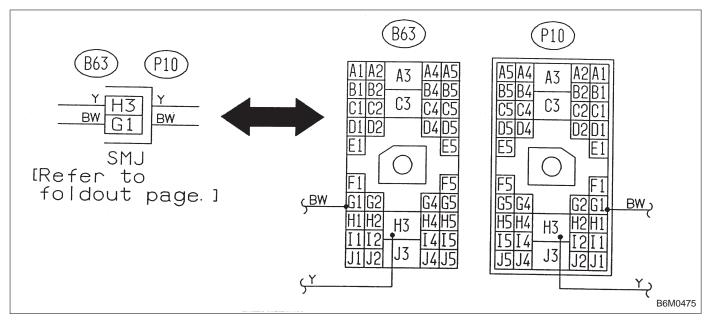


ABBREVIATION LIST


Abbr.	Full name
A.B.S.	Antilock Brake System
ACC	Accessory
A/C	Air Conditioning
AD	Auto Down
AT	Automatic Transmission
AU	Auto Up
+B	Battery
DN	Down
DRL	Daytime Running Light
E	Ground
F/B	Fuse & Joint Box
FL1.5	Fusible link 1.5 mm ²
IG	Ignition
Illumi.	Illumination

Abbr.	Full name
LH	Left Hand
Lo	Low
М	Motor
M/B	Main Fuse Box
MG	Magnet
Mi	Middle
OP	Optional Parts
PASS	Passing
RH	Right Hand
SBF	Slow Blow Fuse
S.M.J.	Super Multiple Junction
ST	Starter
SW	Switch
T.C.S.	Traction Control System
UP	Up
WASH	Washer

6. Wiring Diagram

- 1. POWER SUPPLY ROUTING
- LHD model

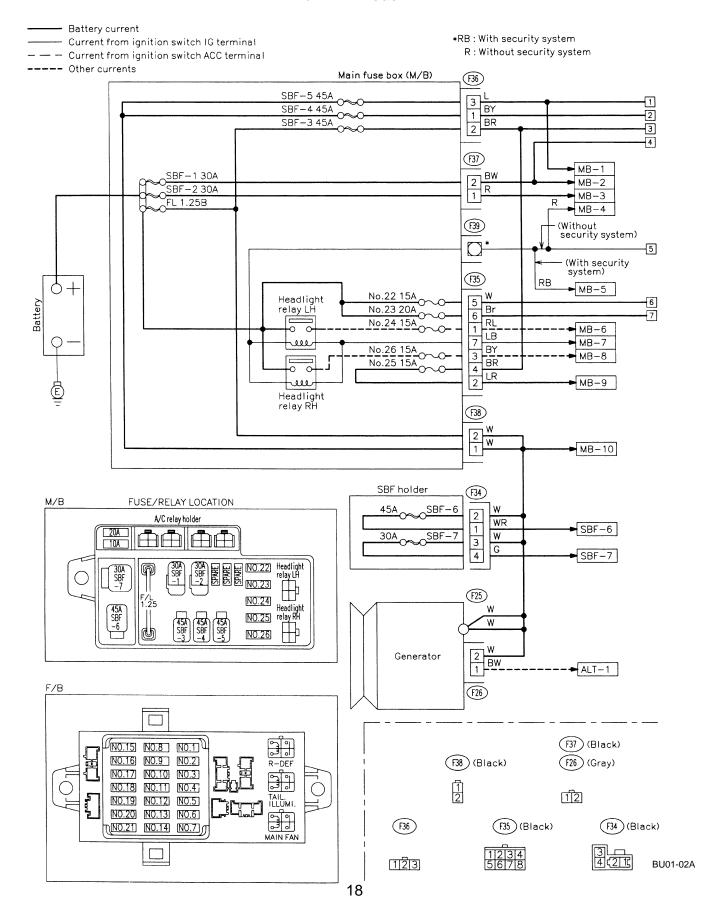

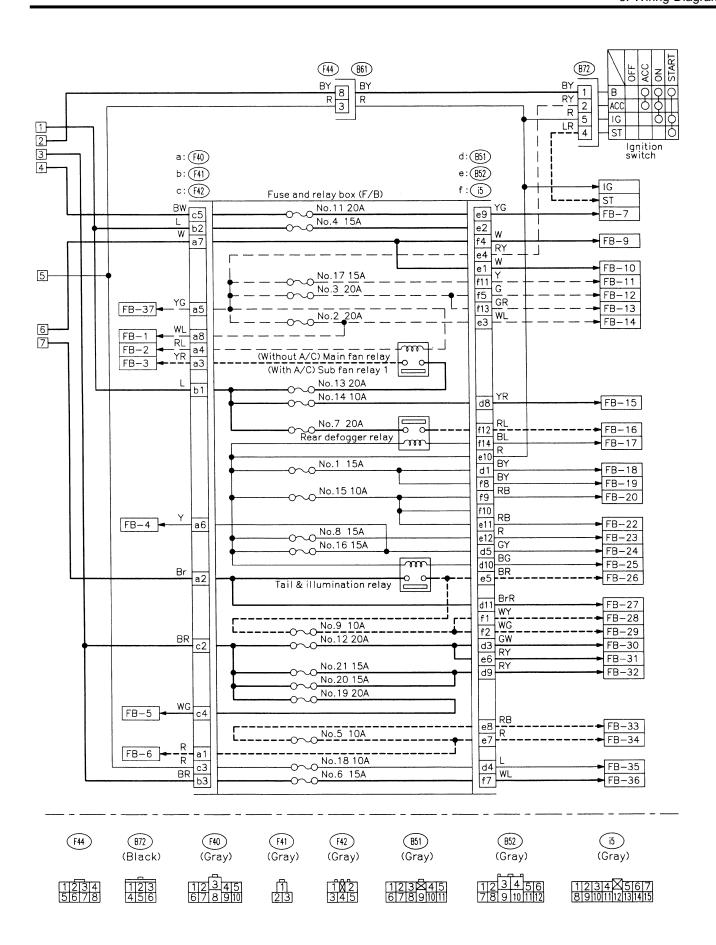

WIRING DIAGRAM

No.	Load	
MB-1	Fuse holder (Rear power supply & seat heater)	
MB-2	Power window circuit breaker	
MB-3	Engine control module Fuel pump relay Main relay OBD-II service connector	
MB-4	A/C relay holder	
MB-5	Headlight alarm relay (with security)	
MB-6	Headlight LH	
MB-7	Daytime running light control module Diode (Lighting) Diode (Security) Lighting switch	
MB-8	Combination meter Front fog light switch Headlight RH Front fog light relay	
MB-9	Door lock timer Headlight alarm relay Interrupt relay Radio Security control module Security indicator light Spot light Room light Step light Combination meter Luggage room light Trailer connector Trunk room light	
MB-10	A/C relay holder	
SBF-6	ABS relay box TCS motor relay	
SBF-7	TCS valve relay	
ALT-1	Combination meter Daytime running light control module Diode (TCS)	
IG	Headlight alarm relay	
ST	Cruise control module Engine control module Inhibitor switch (AT) Interrupt relay Starter interlock relay (MT)	
FB-1	Front washer motor Rear washer motor	
FB-2	Engine control module Main fan relay 1	
FB-3	Sub fan relay 2 Sub fan motor	
FB-4	Engine control module Fuel pump relay Ignition coil Transmission control module	


No.	Load
FB-5	ABS relay box
FB-6	Side marker light LH Side marker light RH
FB-7	Door lock timer
FB-9	Hazard switch
FB-10	AT shift lock control module Key warning switch Power antenna
FB-11	Radio
FB-12	Front accessory power supply
FB-13	Mirror heater Rear power supply relay Remote control rearview mirror switch Security control module Vanity mirror illumination light
FB-14	AT shift lock control module Combination switch Front wiper motor Rear wiper motor Rear wiper relay
FB-15	ABS/TCS control module Transmission control module
FB-16	Rear defogger Rear defogger condenser Rear defogger switch
FB-17	Rear defogger switch
FB-18	AT shift lock control module Back-up light switch (MT) Inhibitor switch (AT)
FB-19	Hazard switch
FB-20	A/C switch Combination meter Mode control panel TCS off switch
FB-22	Blower motor relay Check connector Daytime running light control module Daytime running light relay FRESH/RECIRC actuator Hi-beam relay Power window and sunroof relay Seat belt timer
FB-23	Airbag control module
FB-24	Airbag control module
FB-25	Lighting switch


WIRING DIAGRAM

No.	Load
FB-26	Parking switch
FB-27	Parking switch
FB-28	Illumination light
FB-29	Illumination light
FB-30	Pedal stroke switch Stop light switch Stop & brake switch
FB-31	Horn relay
FB-32	Blower motor relay
FB-33	Parking switch
FB-34	License plate light Rear combination light LH Rear combination light RH Rear finisher light LH Rear finisher light RH
FB-35	ABS control module ABS/TCS control module TCS valve relay Cruise control main switch Cruise control module
FB-36	Front fog light relay
FB-37	Main fan relay 1

1. POWER SUPPLY ROUTING

RHD model

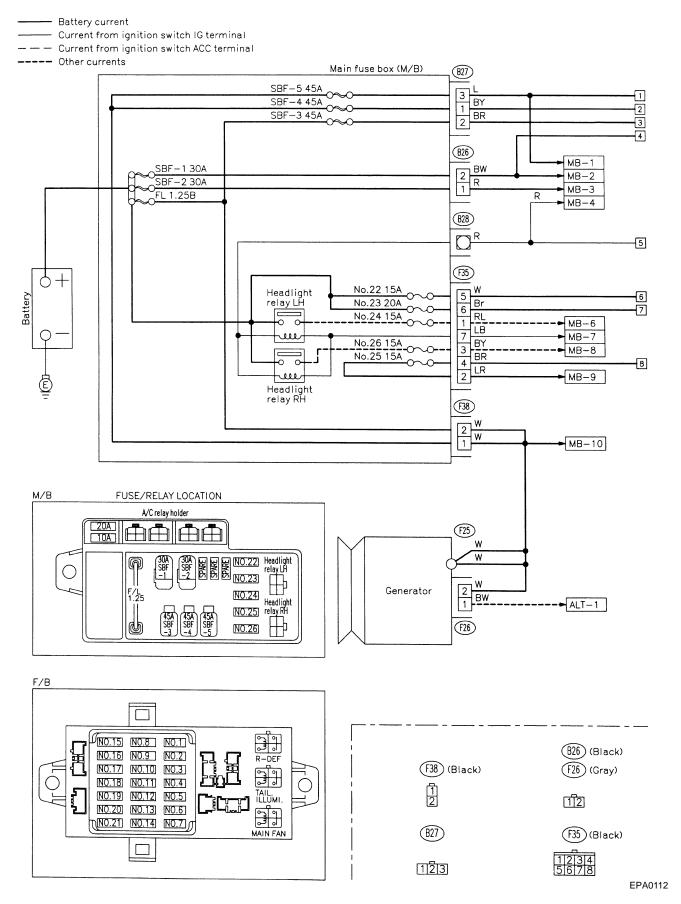

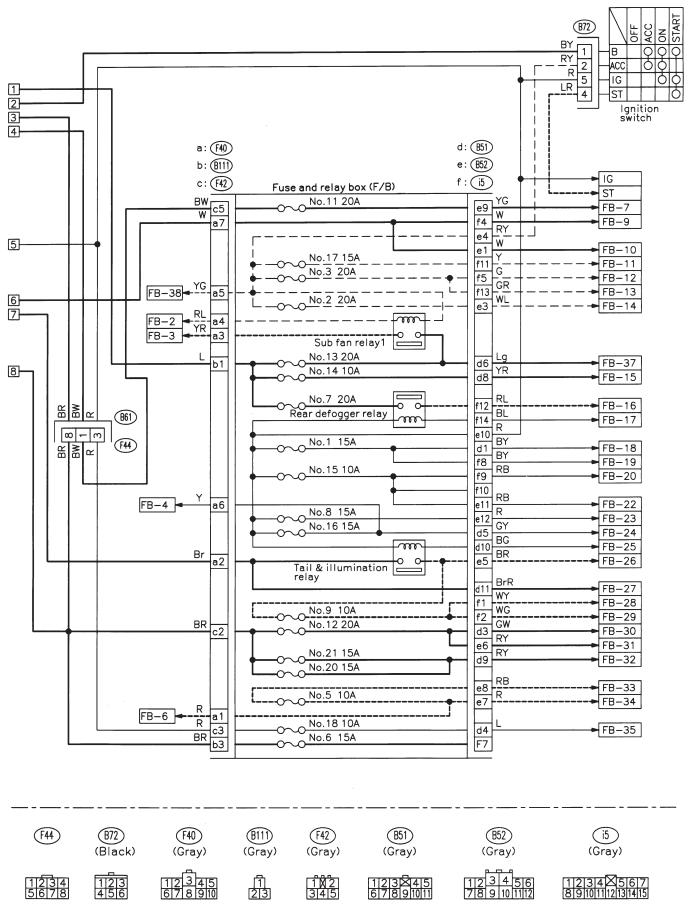


No.	Load
MB-2	Power window circuit breaker
MB-3	Engine control module Fuel pump relay Main relay OBD-II service connector
MB-4	A/C relay holder
MB-6	Headlight LH
MB-7	Diode (Lighting) Lighting switch
MB-8	Combination meter Headlight RH
MB-9	Combination meter Door lock timer Luggage room light Radio Room light
MB-10	A/C relay holder
ALT-1	Combination meter
IG	A/C relay holder
ST	Cruise control module Engine control module Inhibitor switch
FB-2	Engine control module Main fan relay 1
FB-3	Sub fan motor Sub fan relay-2
FB-4	Engine control module Fuel pump relay Ignition coil Transmission control module
FB-6	Side marker light LH Side marker light RH
FB-7	Door lock timer
FB-9	Hazard switch
FB-10	AT shift lock control module Key warning switch Power antenna
FB-11	Radio
FB-12	Cigarette lighter
FB-13	Remote control rearview mirror switch
FB-14	AT shift lock control module Combination switch Front washer motor Front wiper motor Rear washer motor Rear wiper motor Rear wiper relay


No.	Load
FB-15	Transmission control module
FB-16	Rear defogger Rear defogger condenser Rear defogger switch
FB-17	Rear defogger switch
FB-18	AT shift lock control module Inhibitor switch
FB-19	Hazard switch
FB-20	Combination meter Mode control panel
FB-22	Blower motor relay Check connector FRESH/RECIRC actuator Mode actuator Power window relay Seat belt timer
FB-23	Airbag control module
FB-24	Airbag control module
FB-25	Lighting switch
FB-26	Parking switch
FB-27	Parking switch
FB-28	Illumination light
FB-29	Illumination light
FB-30	Stop light switch Stop & brake switch
FB-31	Horn relay
FB-32	Blower motor relay
FB-33	Parking switch
FB-34	License plate light LH License plate light RH Rear combination light LH Rear combination light RH Rear finisher light LH Rear finisher light RH
FB-35	Cruise control main switch Cruise control module
FB-38	Main fan relay 1


2. GROUND DISTRIBUTION

LHD model

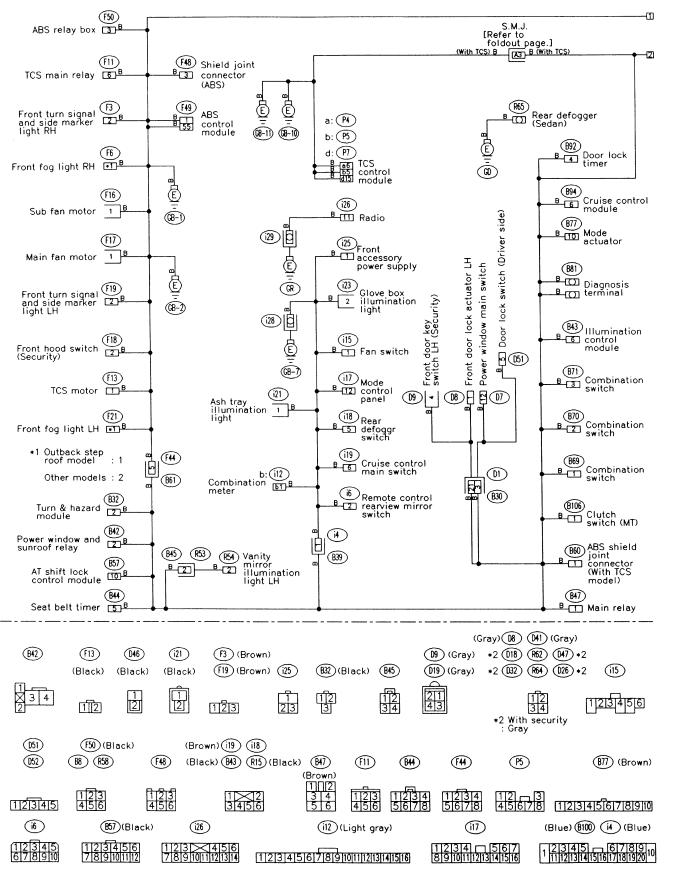


WIRING DIAGRAM

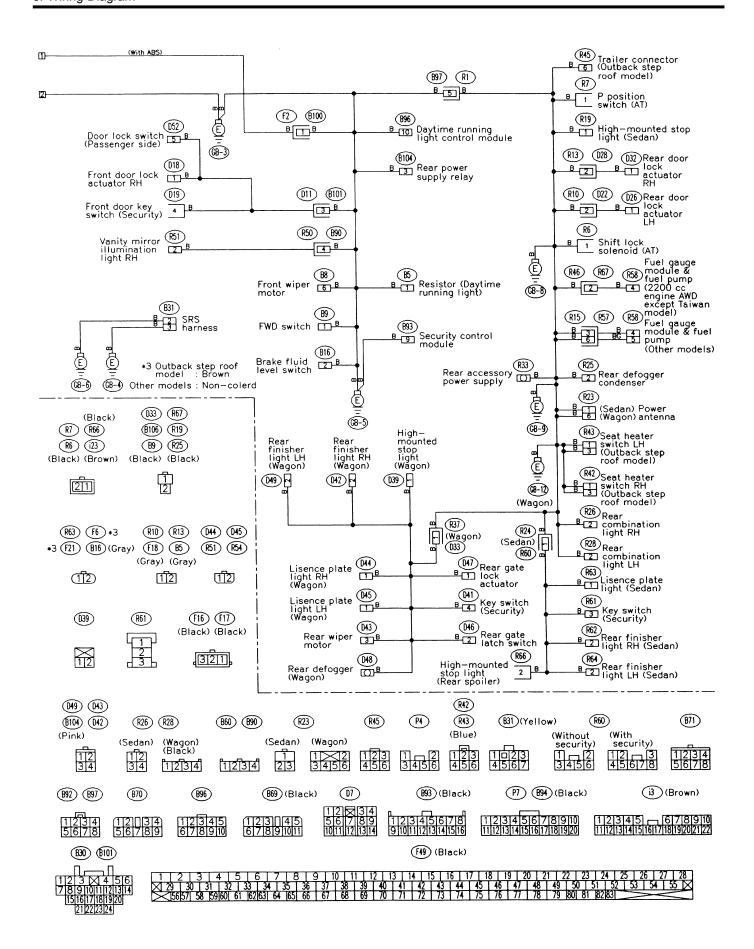


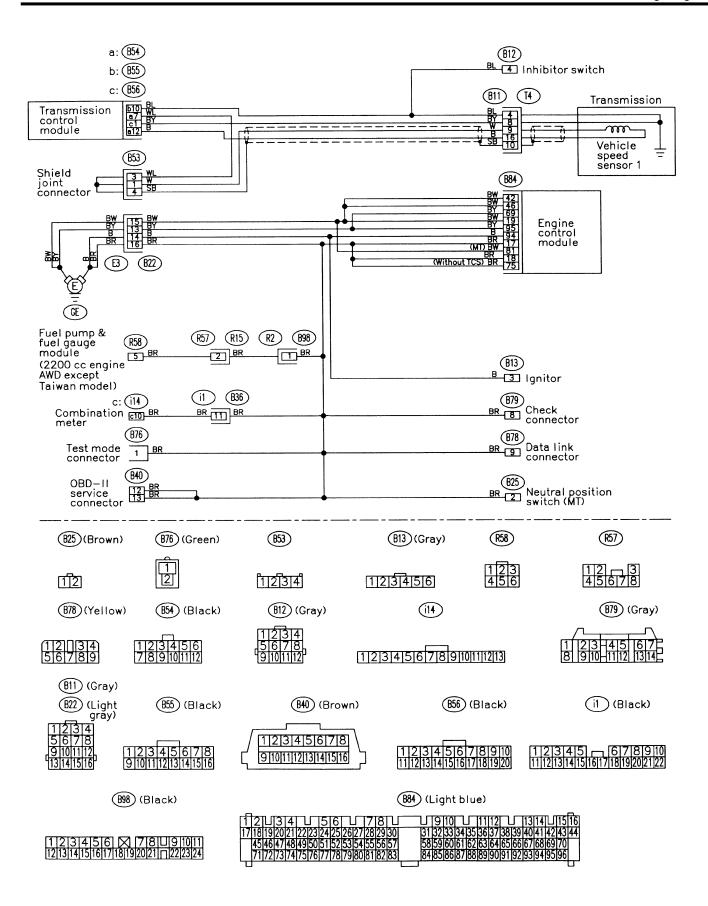


2. GROUND DISTRIBUTION

RHD model

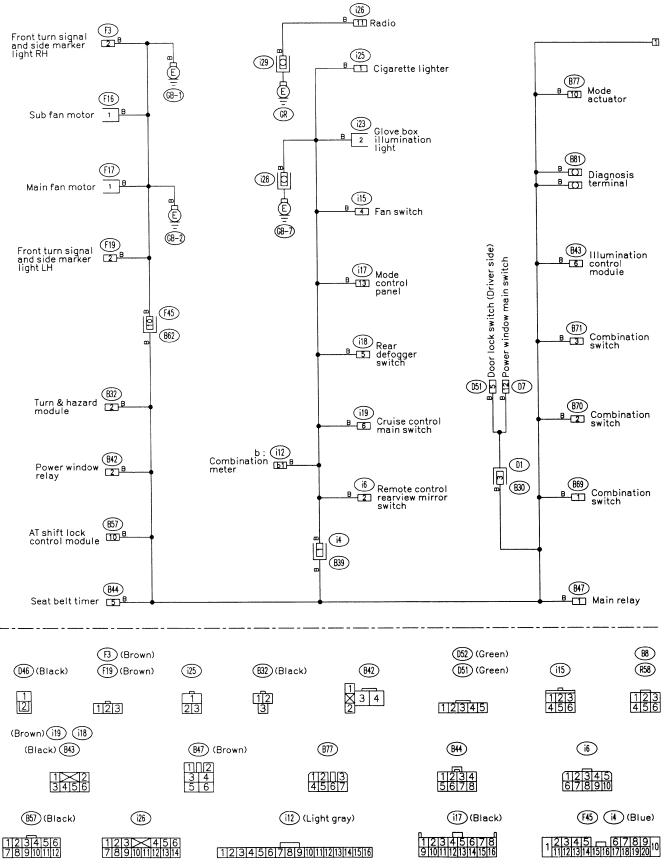


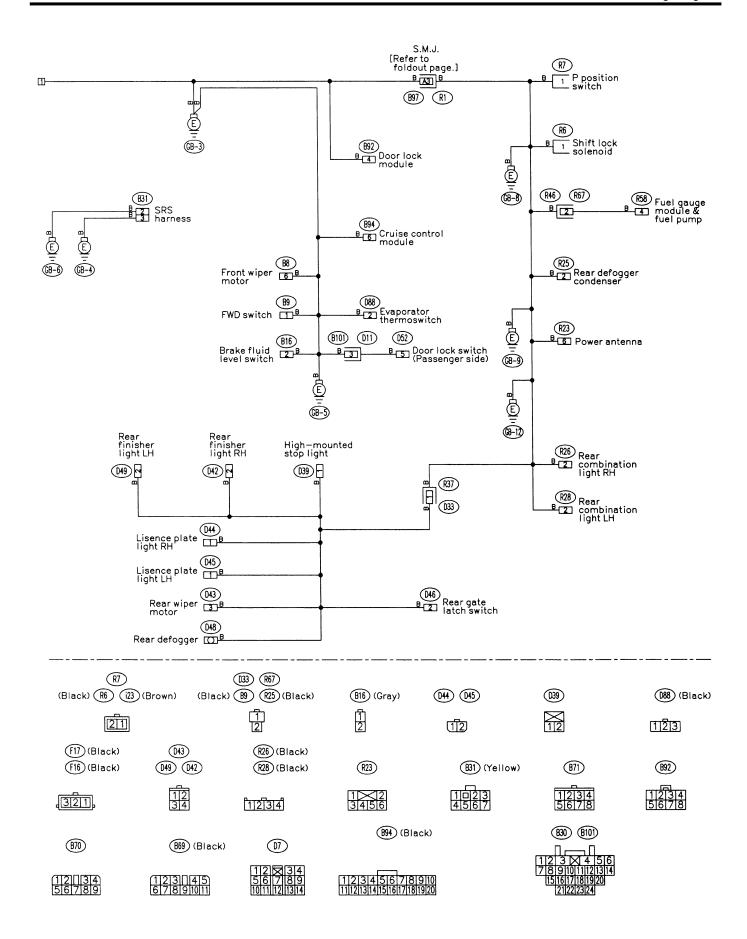

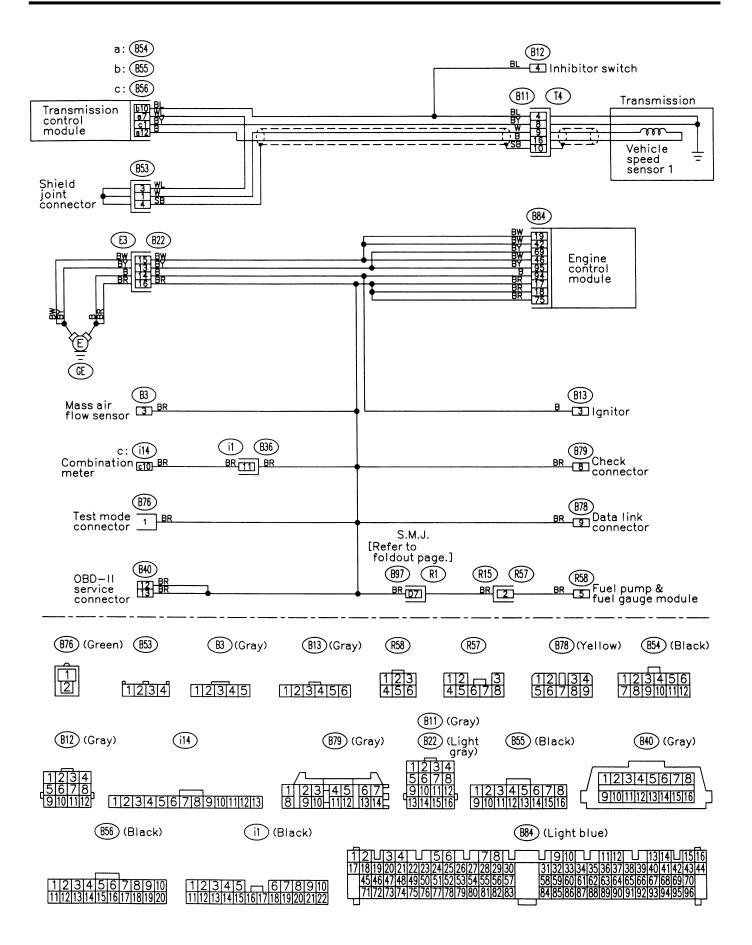


3. AIR CONDITIONING SYSTEM

LHD model

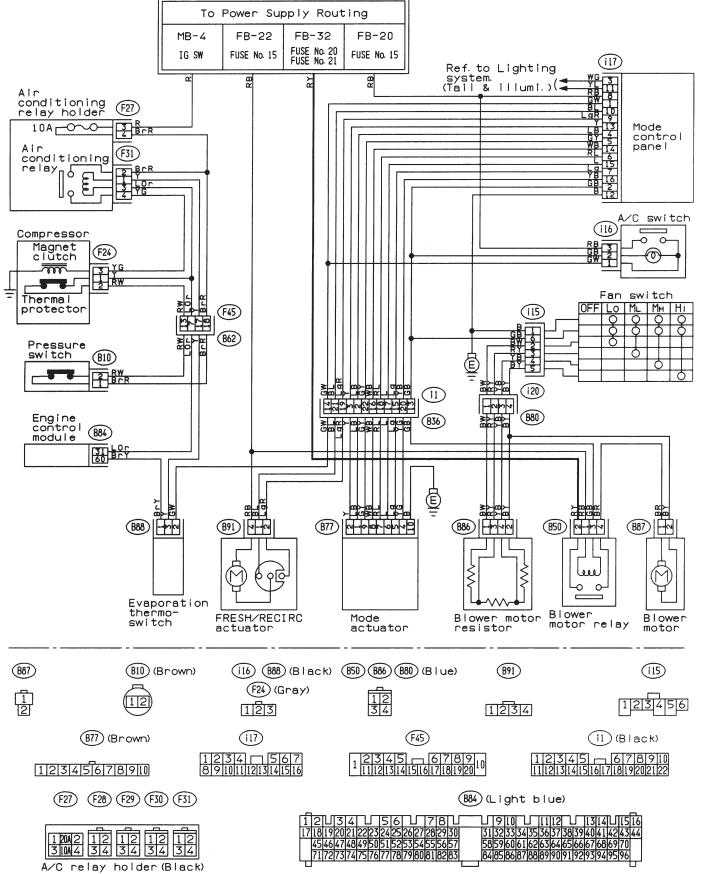



3. AIR CONDITIONING SYSTEM

RHD model

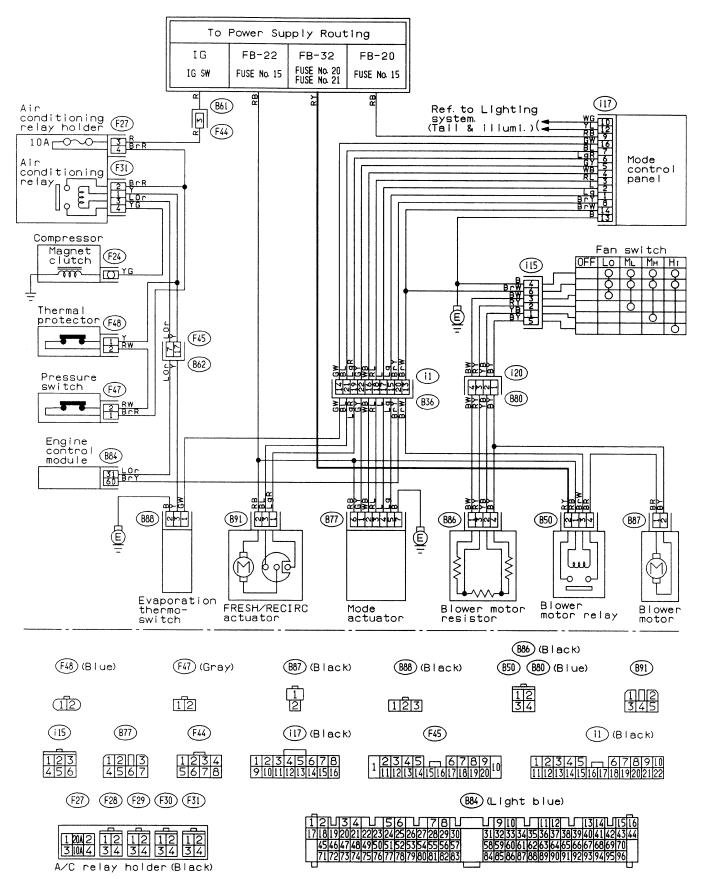


4. ANTI-LOCK BRAKE SYSTEM

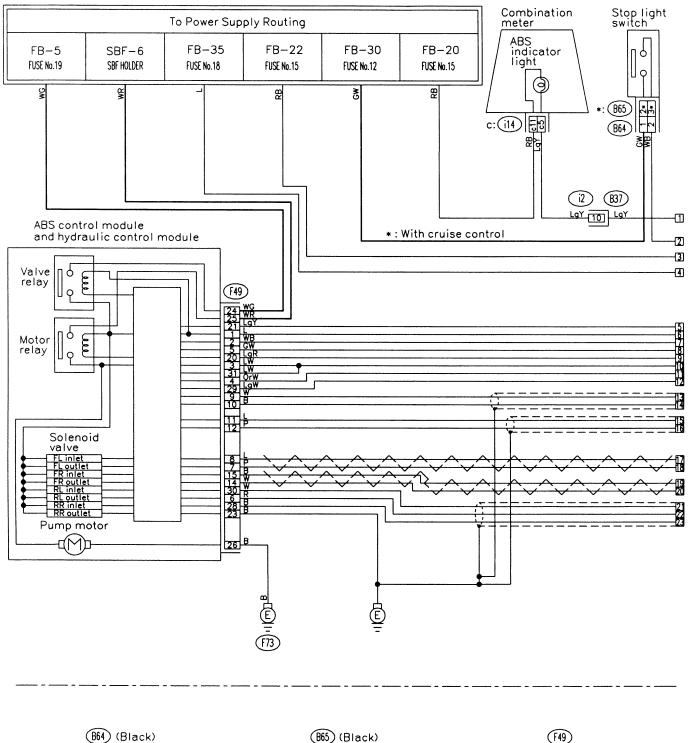


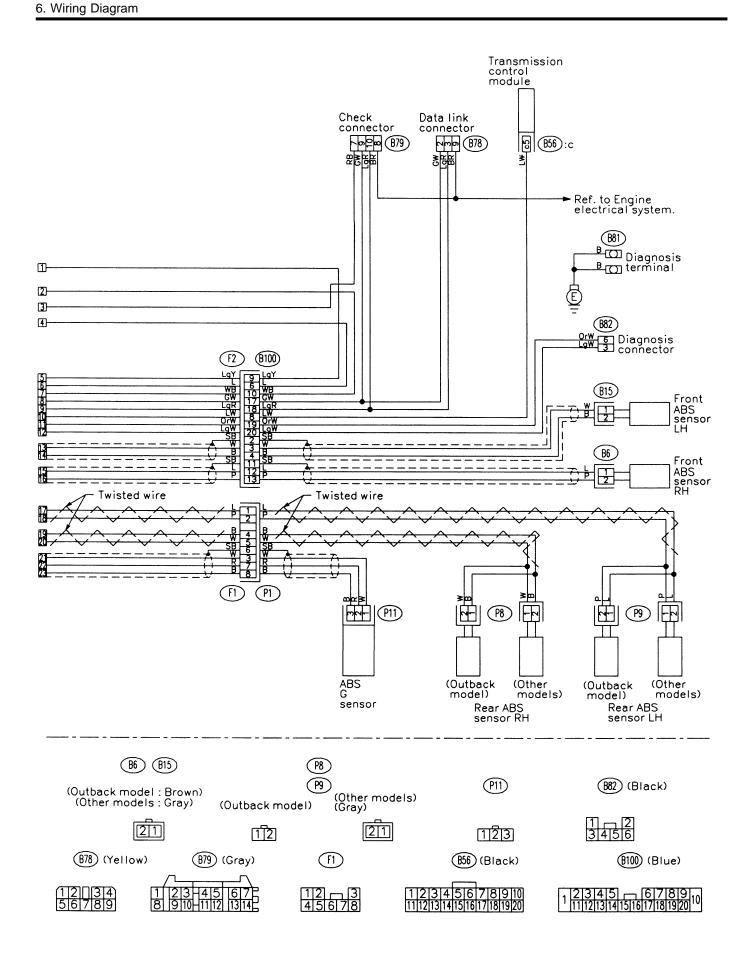


5. AT CONTROL SYSTEM


LHD model

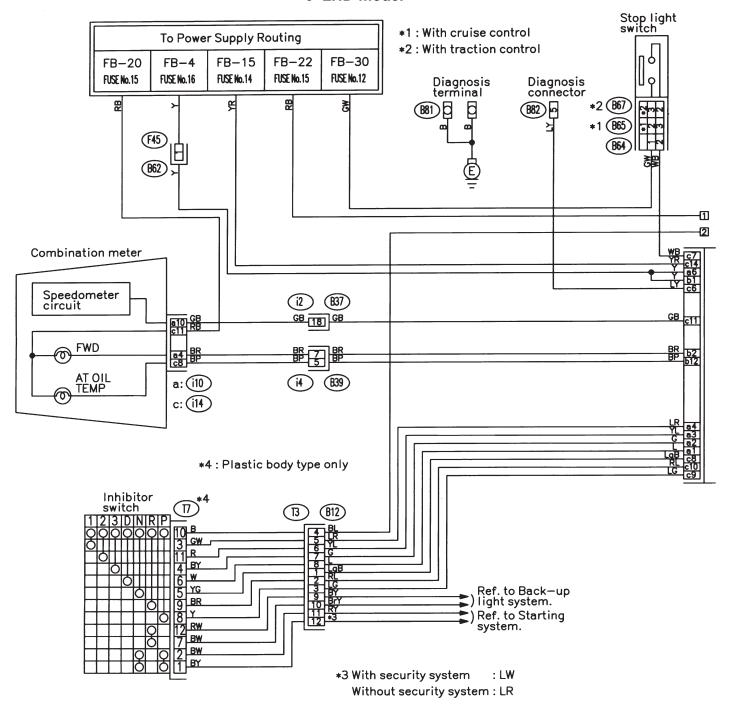


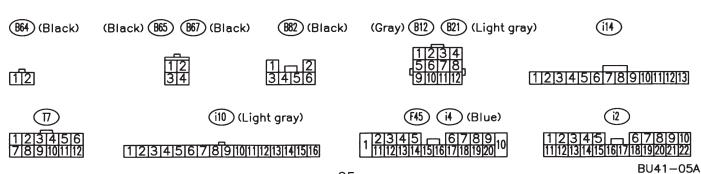

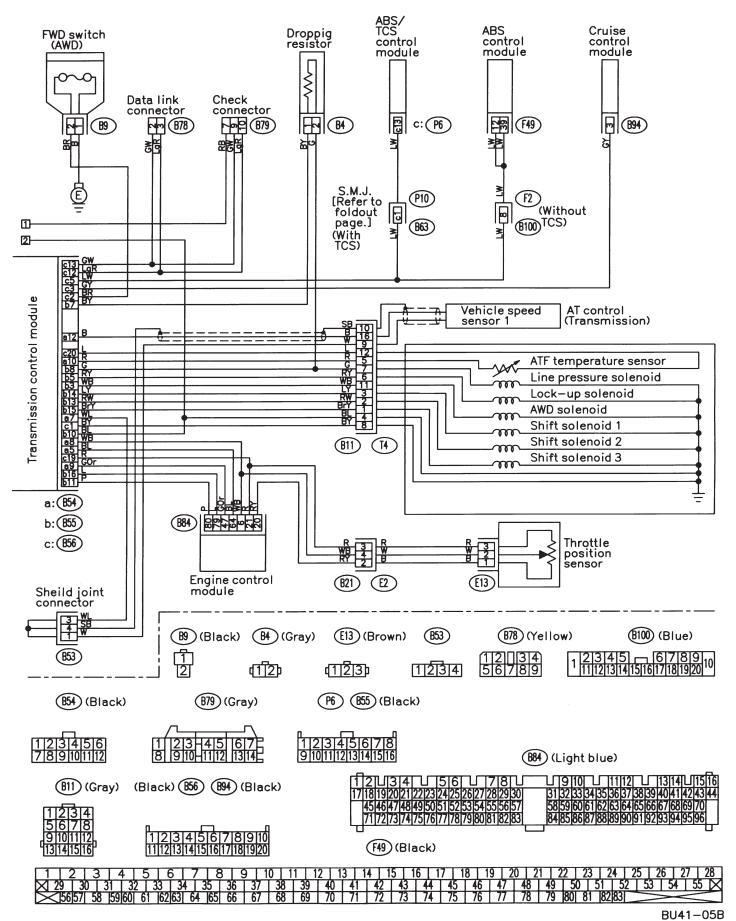


5. AT CONTROL SYSTEM

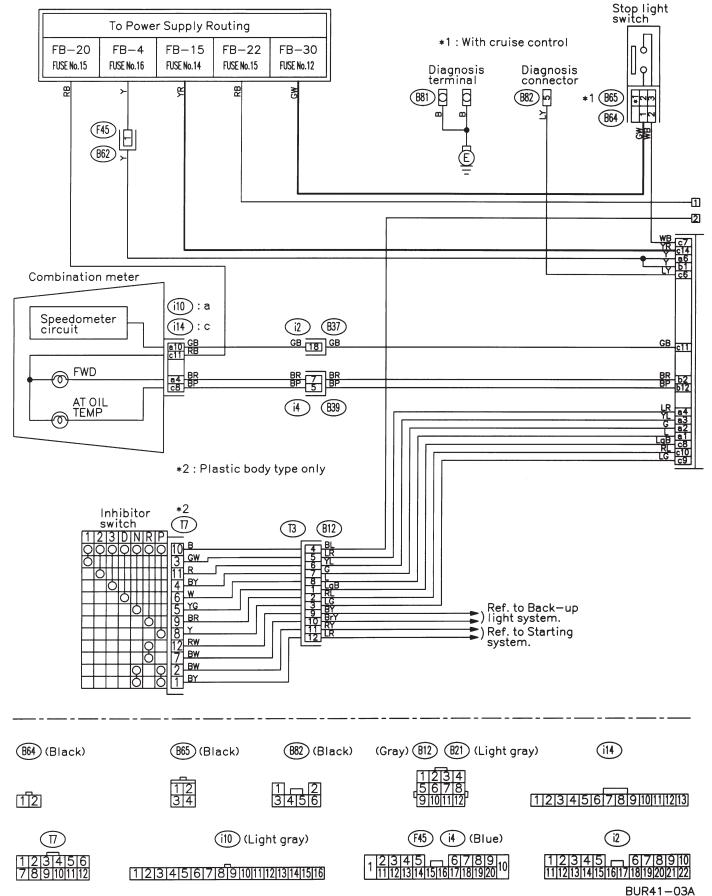

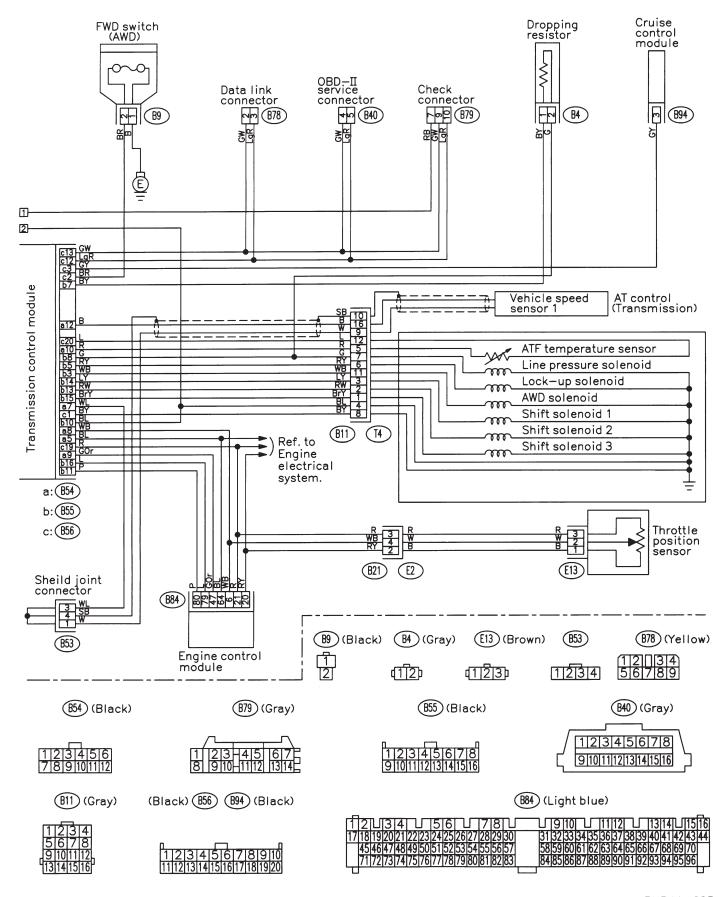


6. AT SHIFT LOCK SYSTEM

LHD model

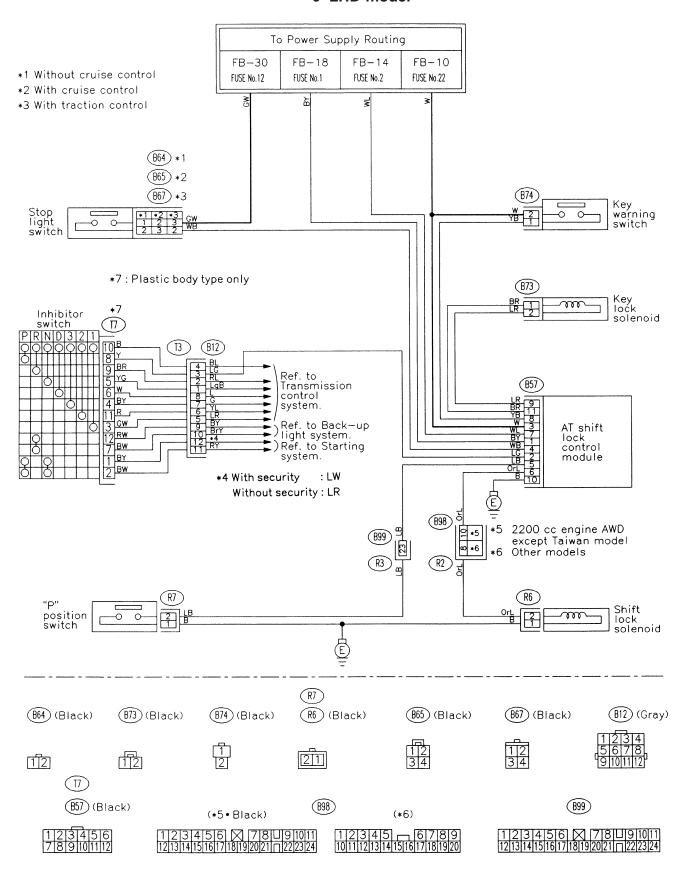


6. AT SHIFT LOCK SYSTEM

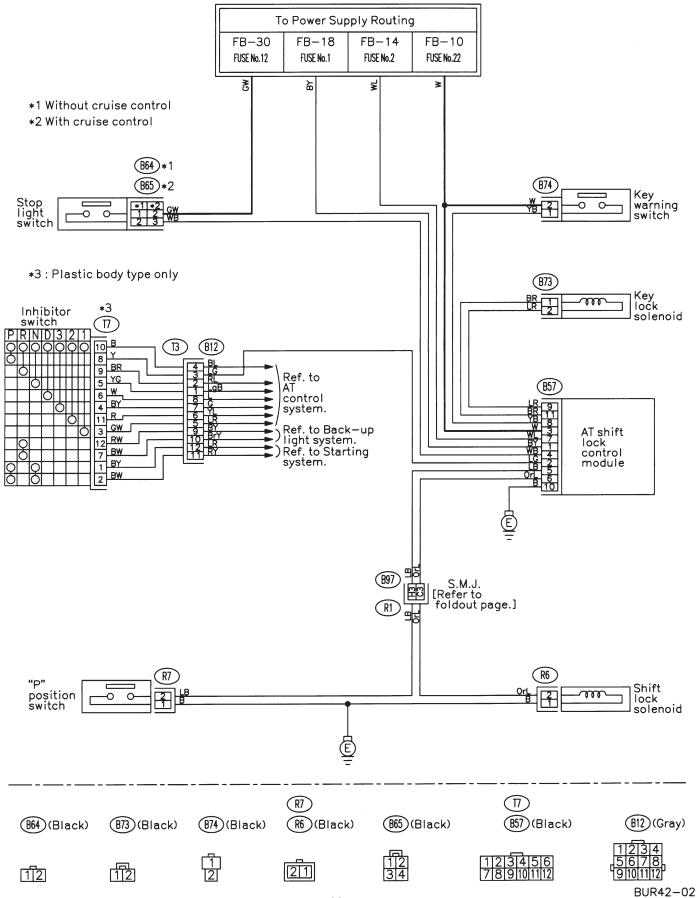


7. AUDIO SYSTEM

LHD model

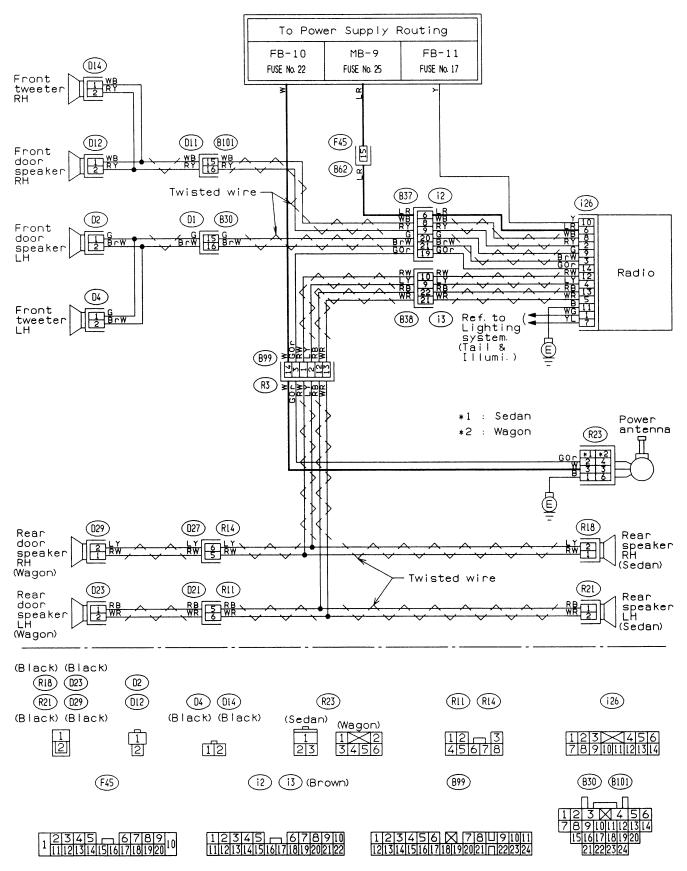


7. AUDIO SYSTEM

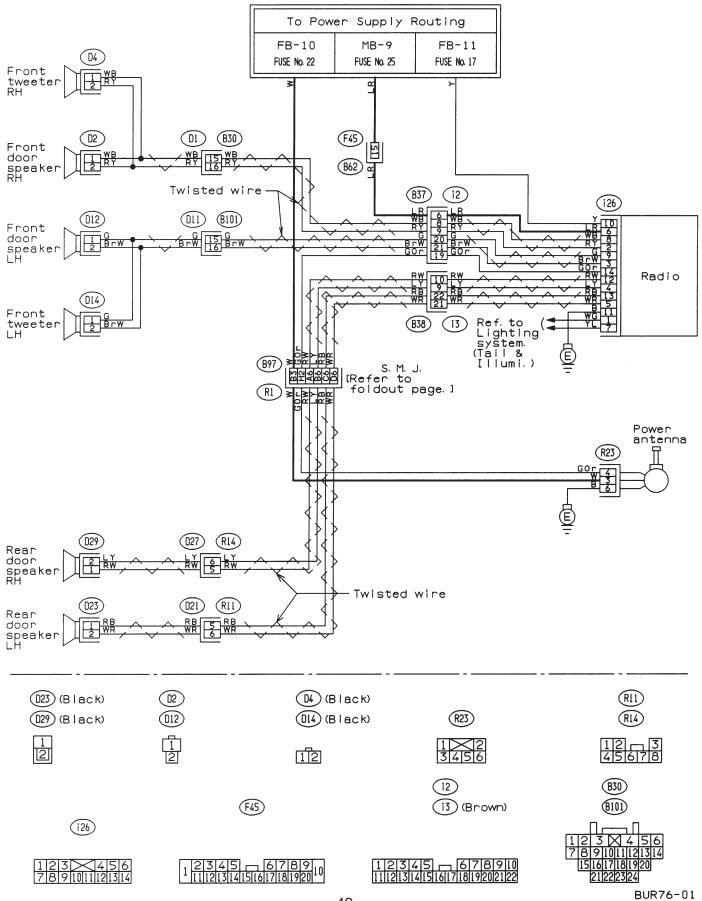


8. BACK-UP LIGHT SYSTEM


LHD model

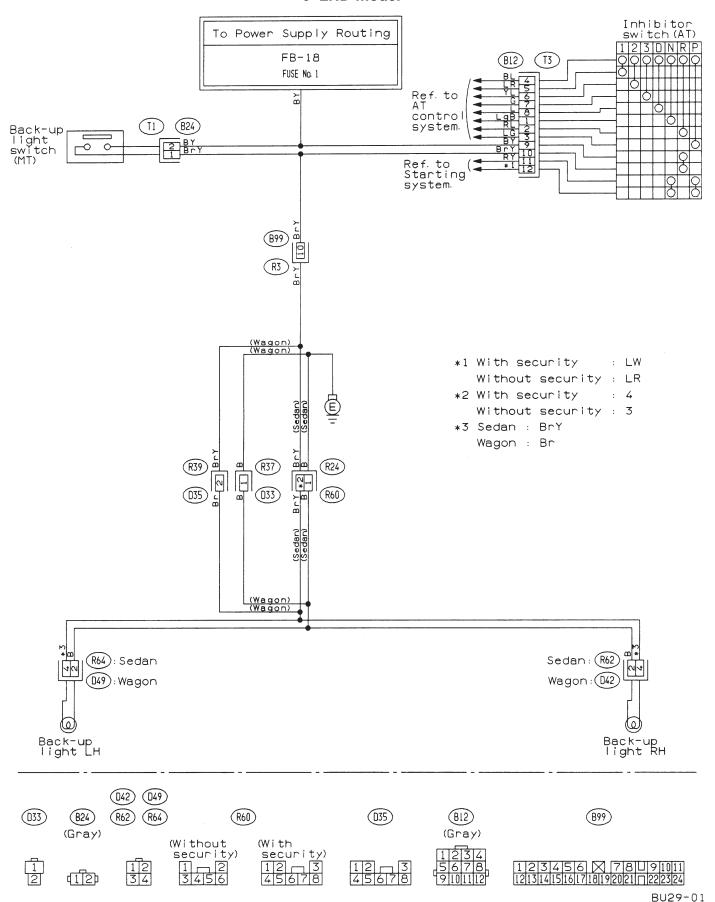


8. BACK-UP LIGHT SYSTEM

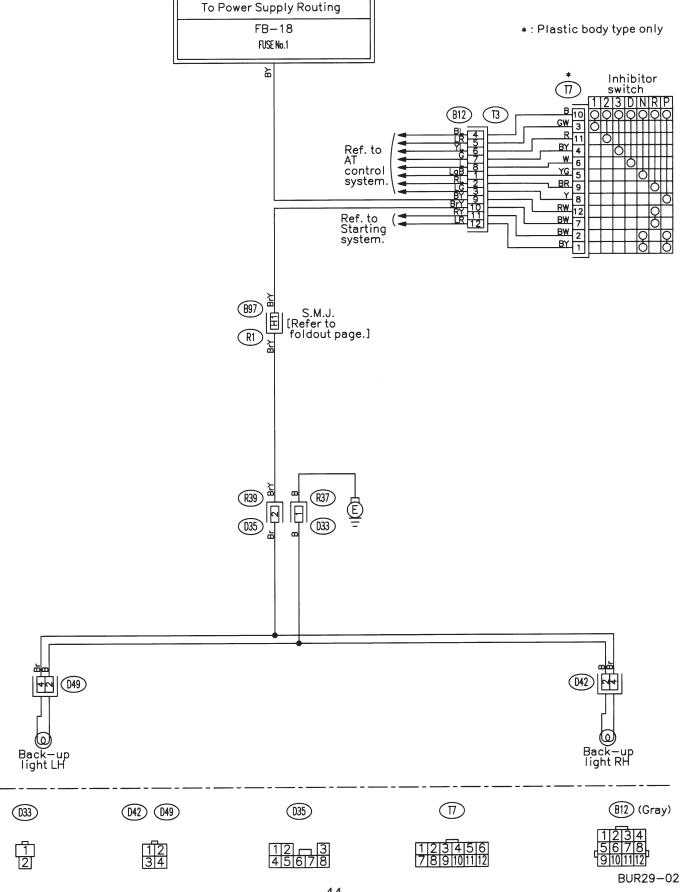


9. CHARGE WARNING SYSTEM

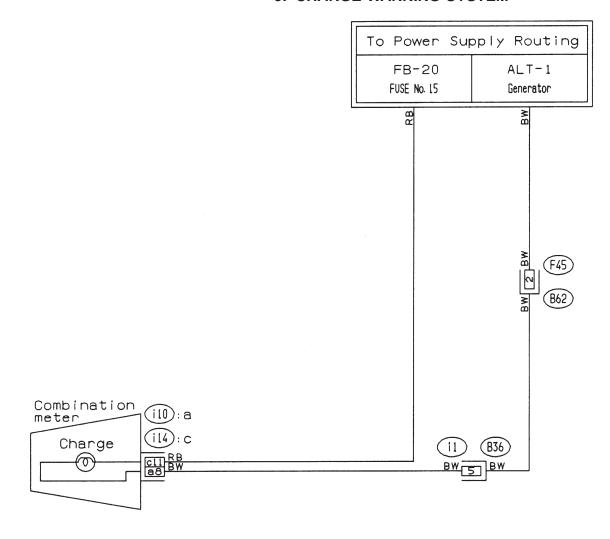


10. COMBINATION METER

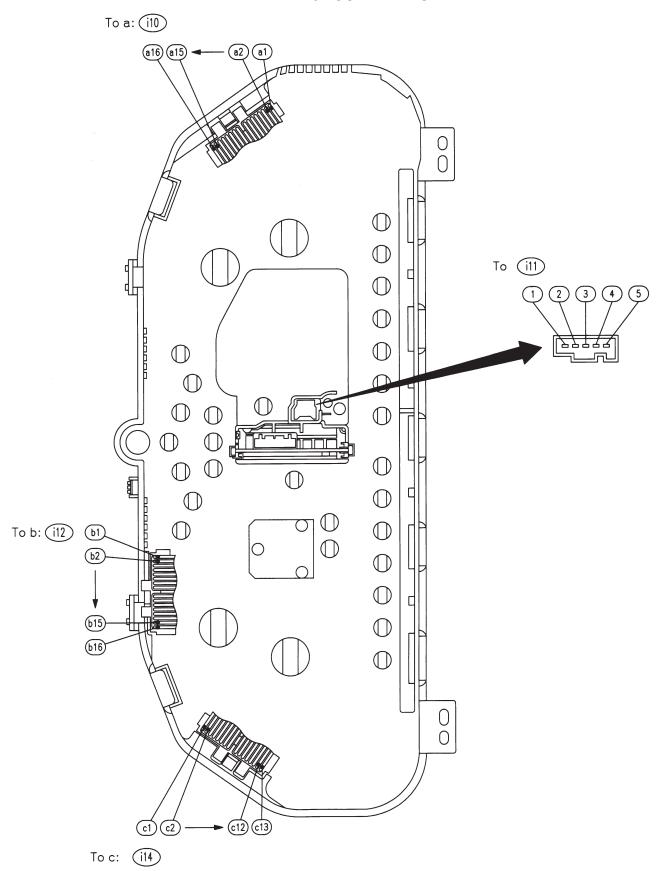

BU65-02A

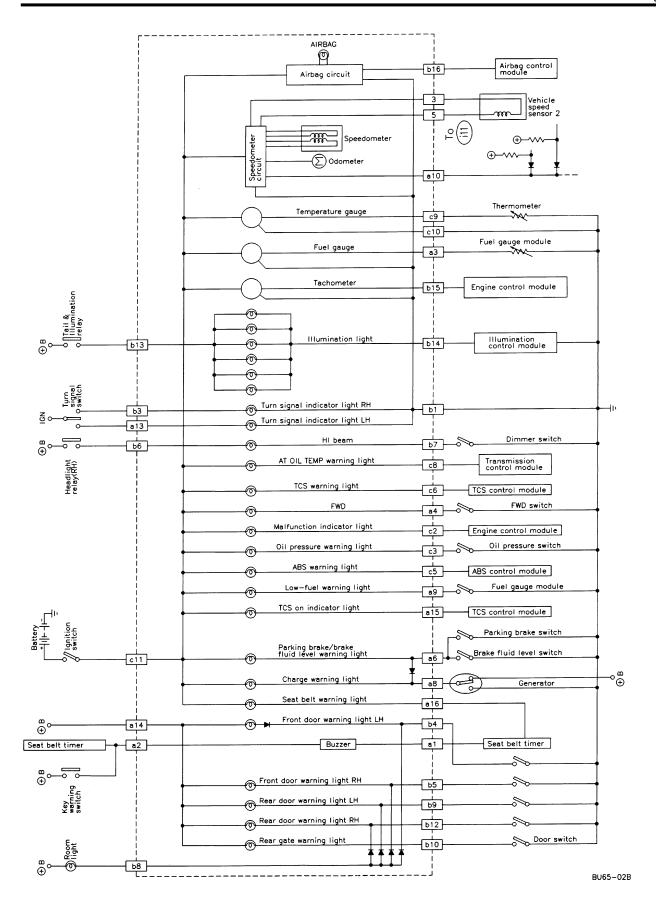


11. CRUISE CONTROL SYSTEM

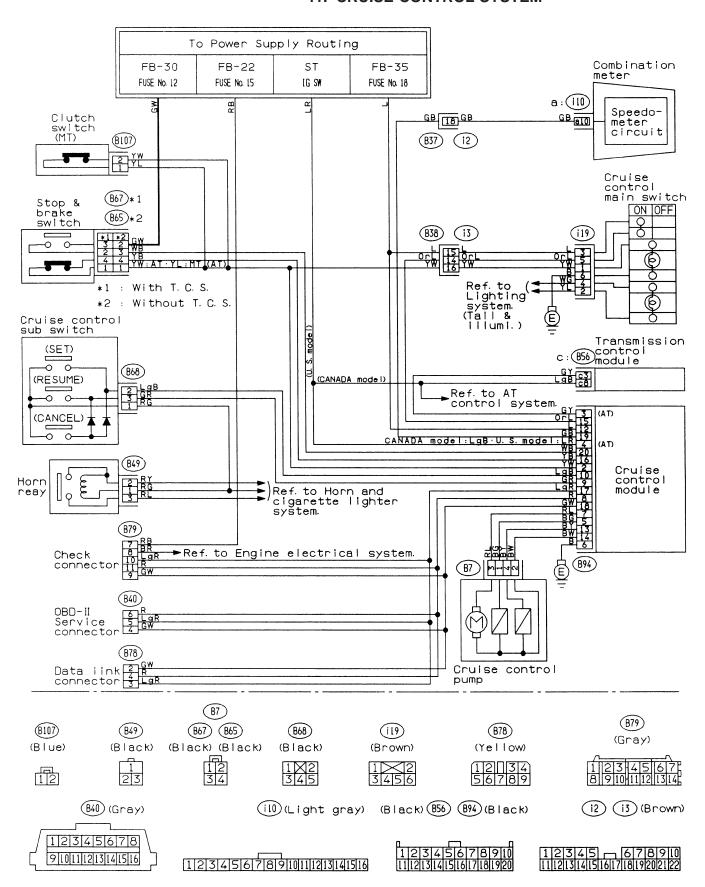


12. DOOR LOCK SYSTEM

LHD model

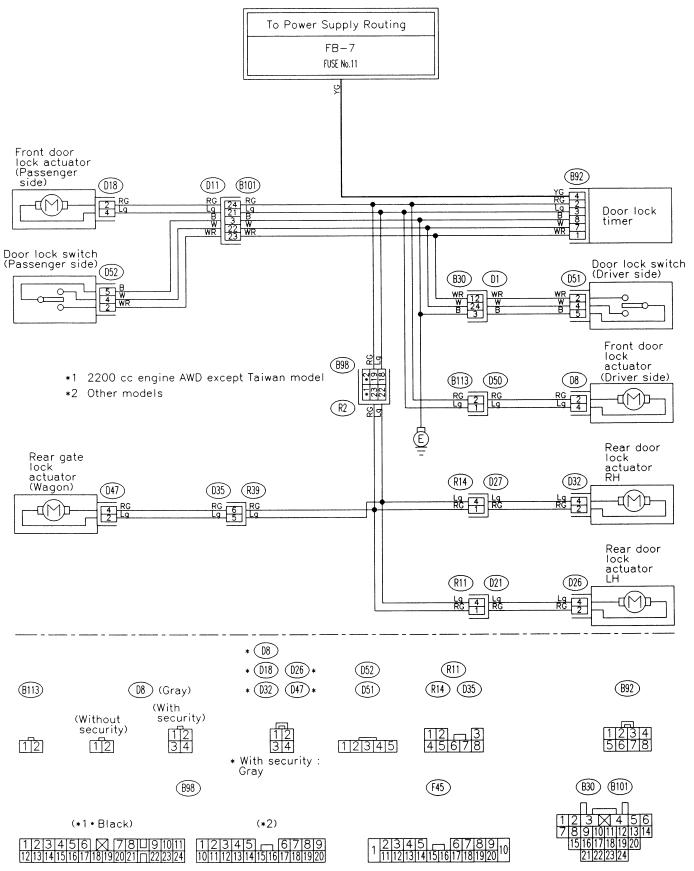



12. DOOR LOCK SYSTEM

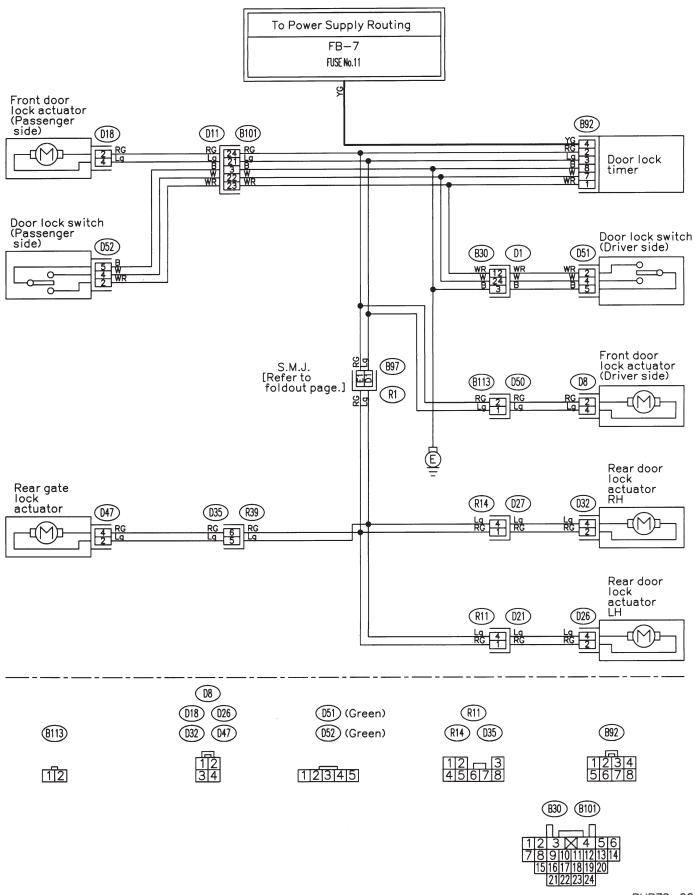

13. ENGINE ELECTRICAL SYSTEM


LHD 2200 cc engine AWD model

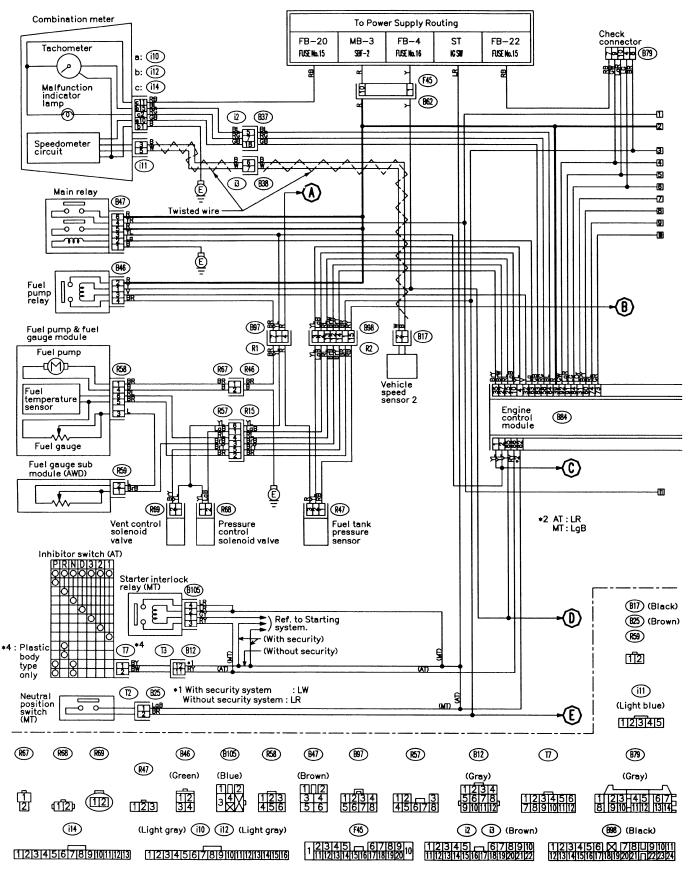


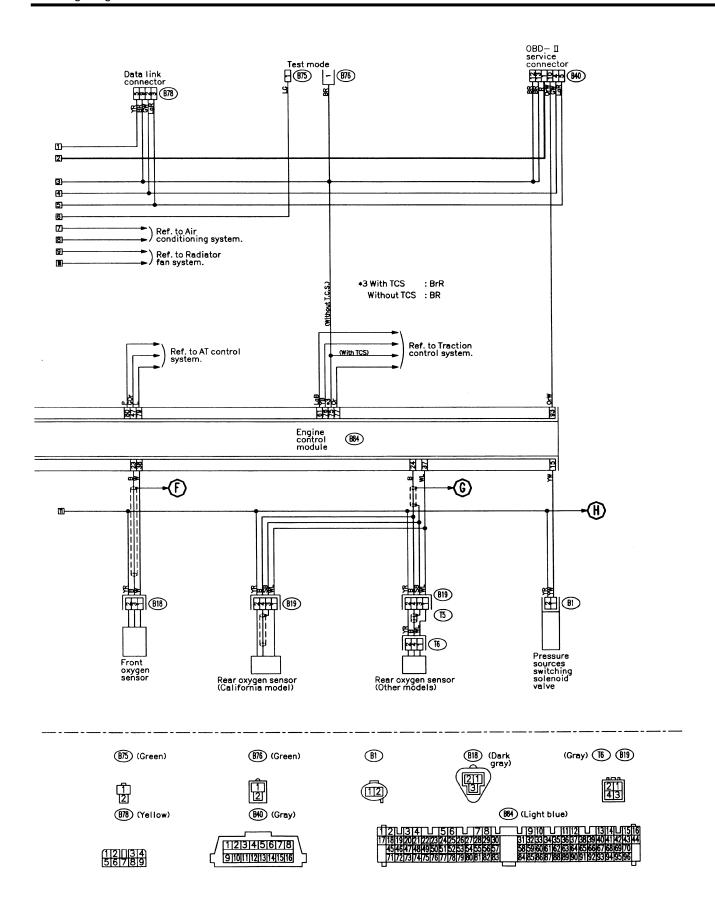

6-3


6. Wiring Diagram

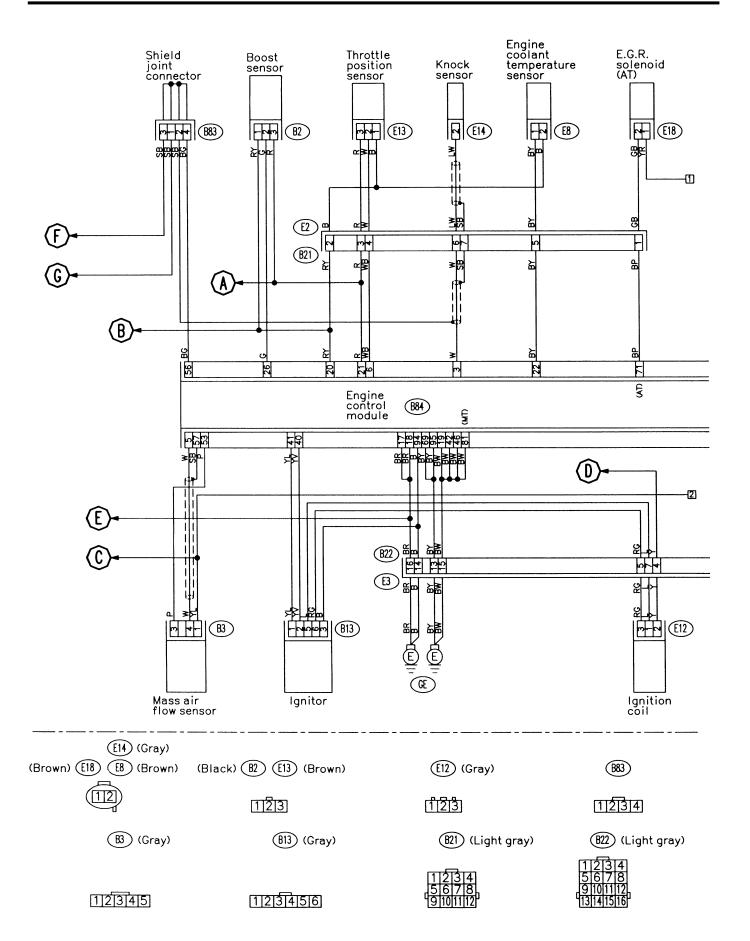


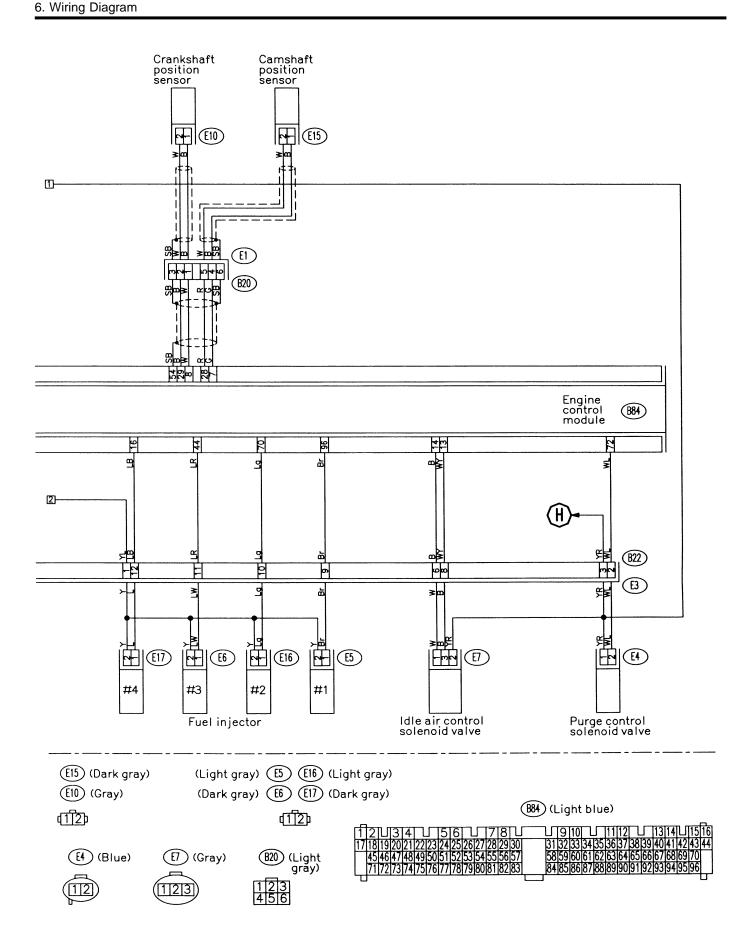



13. ENGINE ELECTRICAL SYSTEM

LHD other models

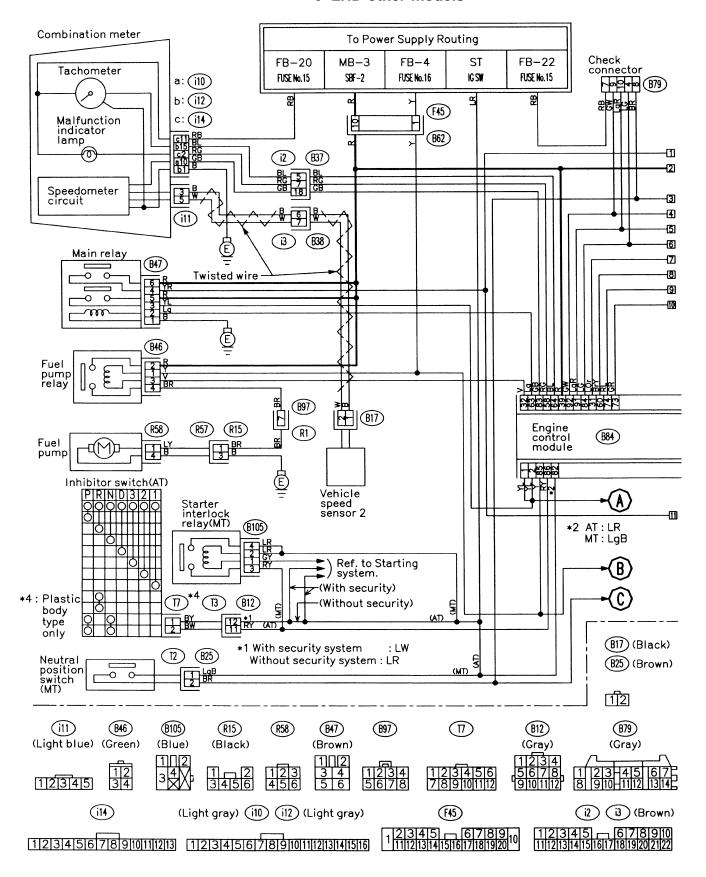


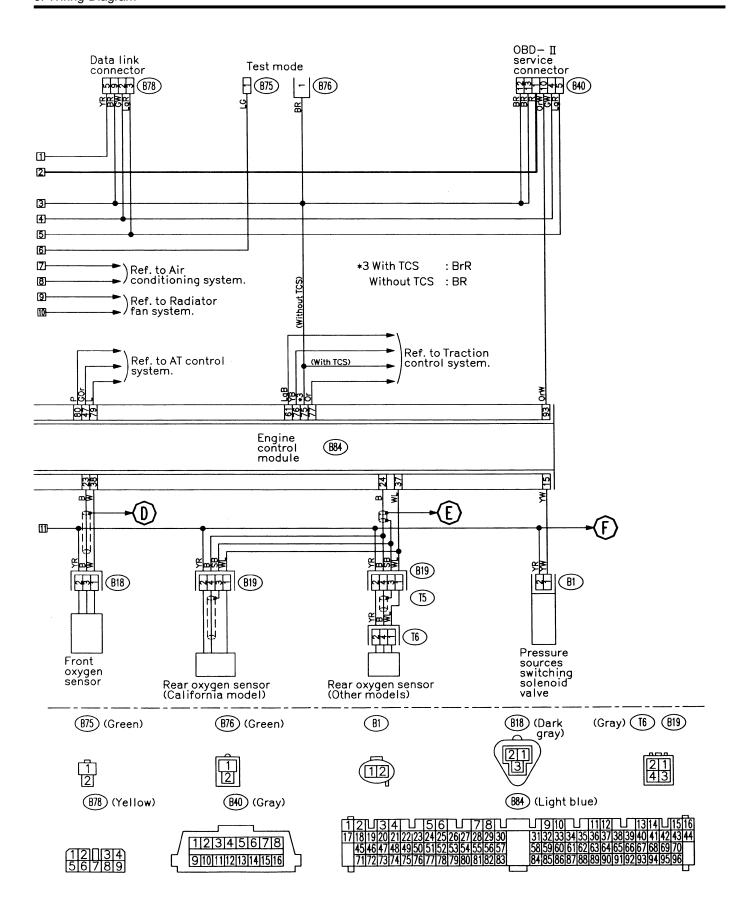


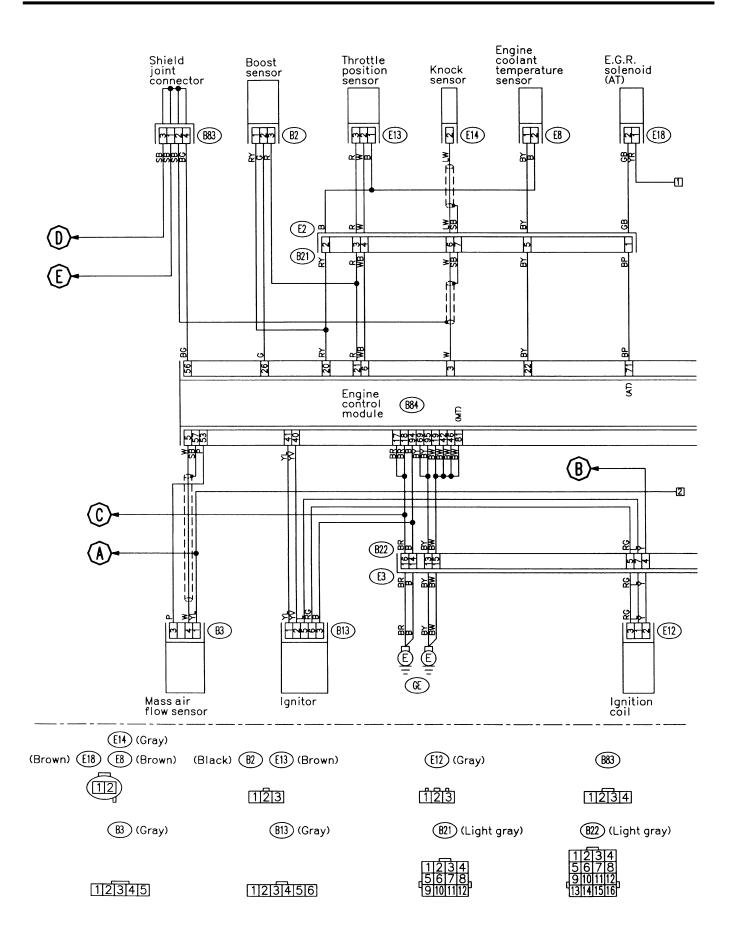


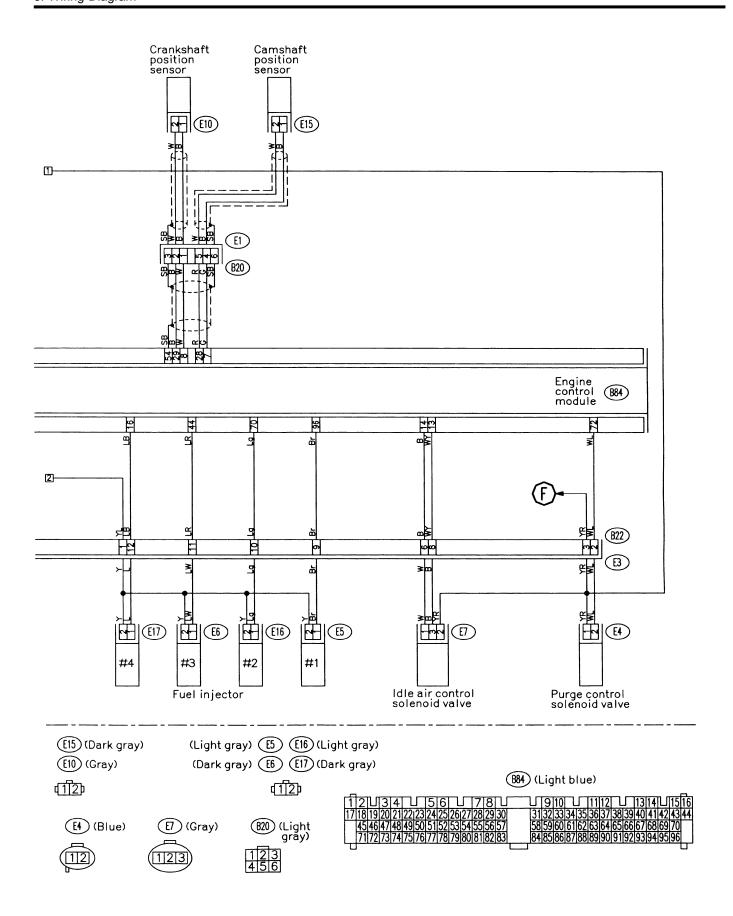


13. ENGINE ELECTRICAL SYSTEM

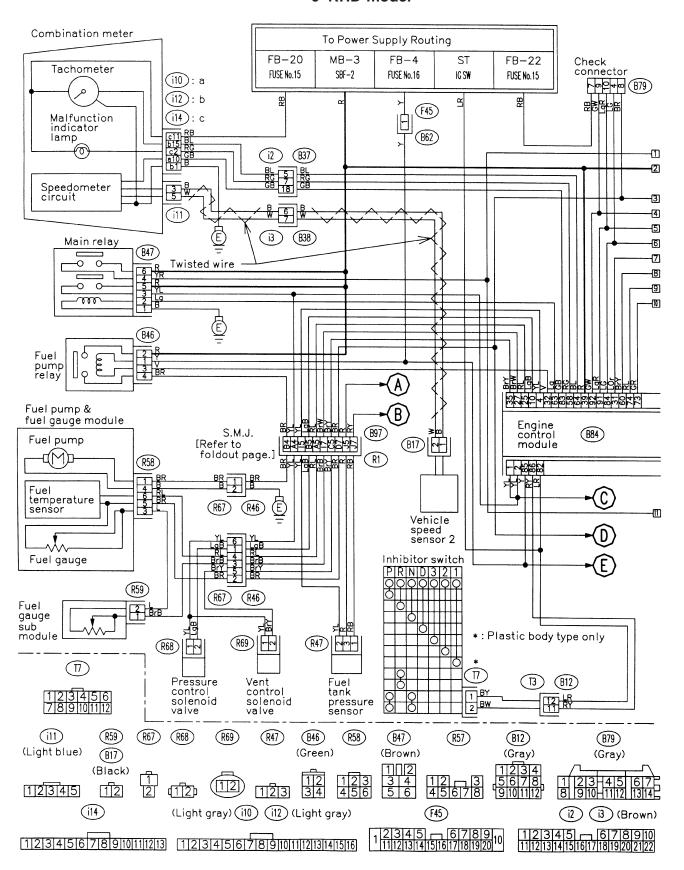

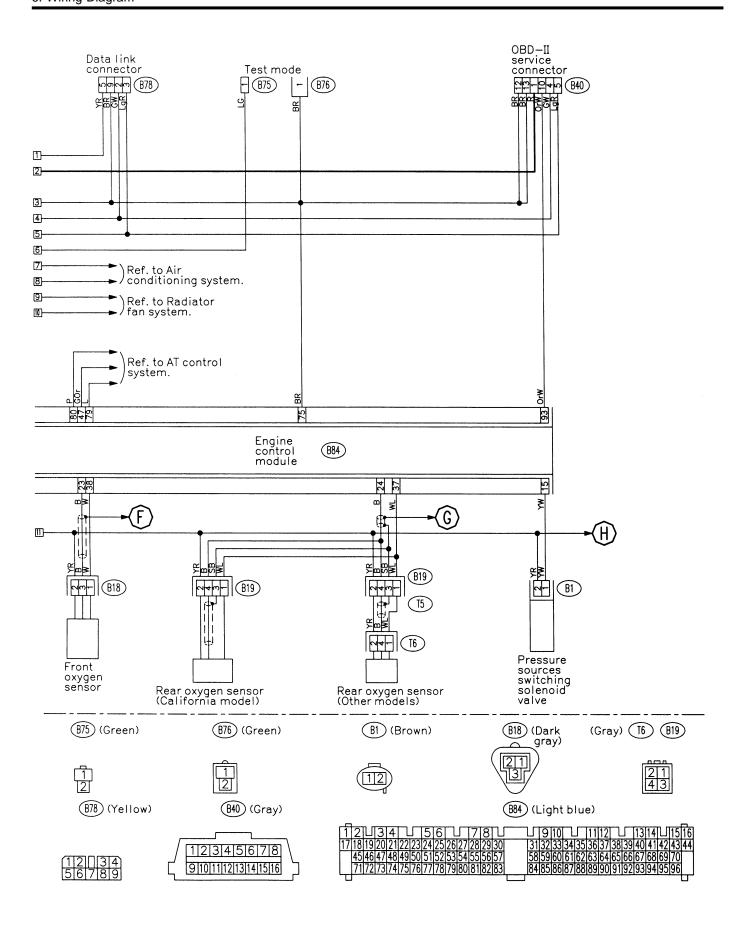


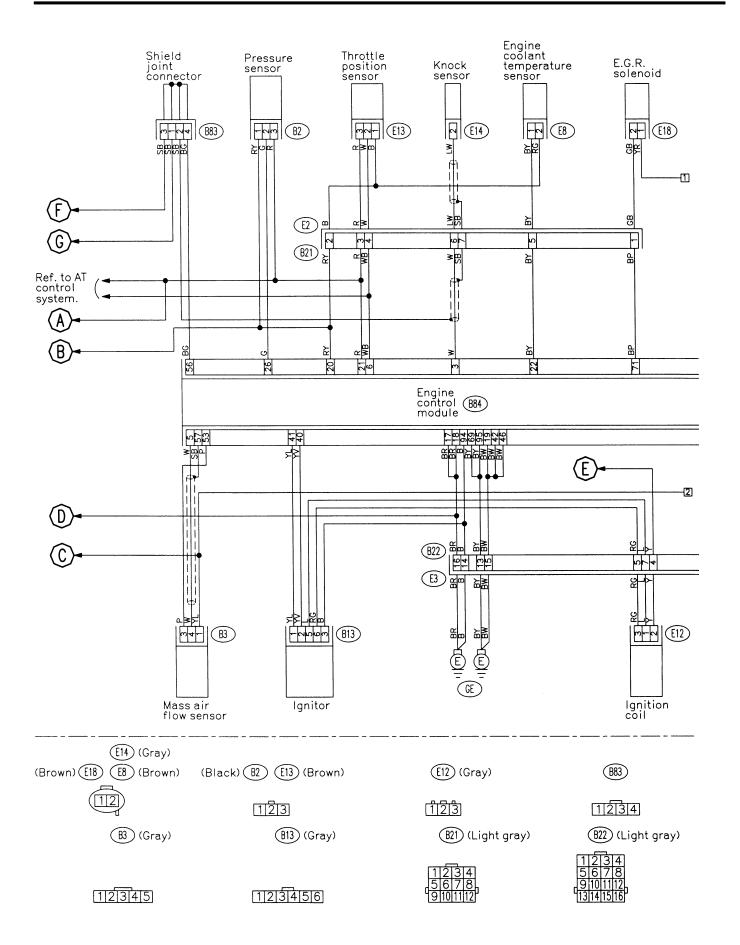

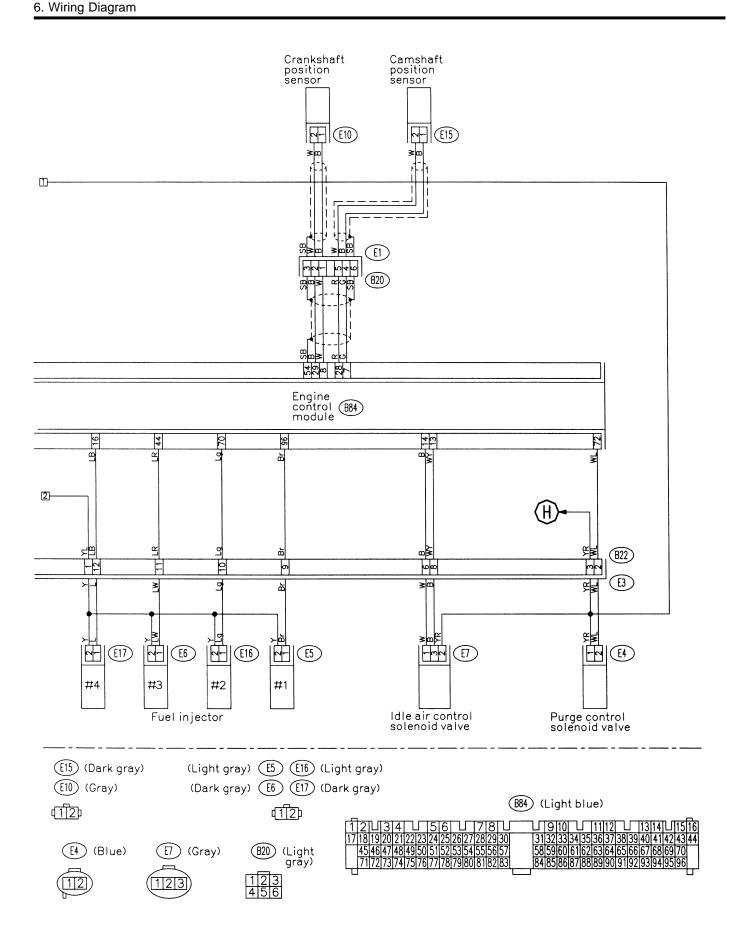


14. FRONT FOG LIGHT SYSTEM

Without DRL model

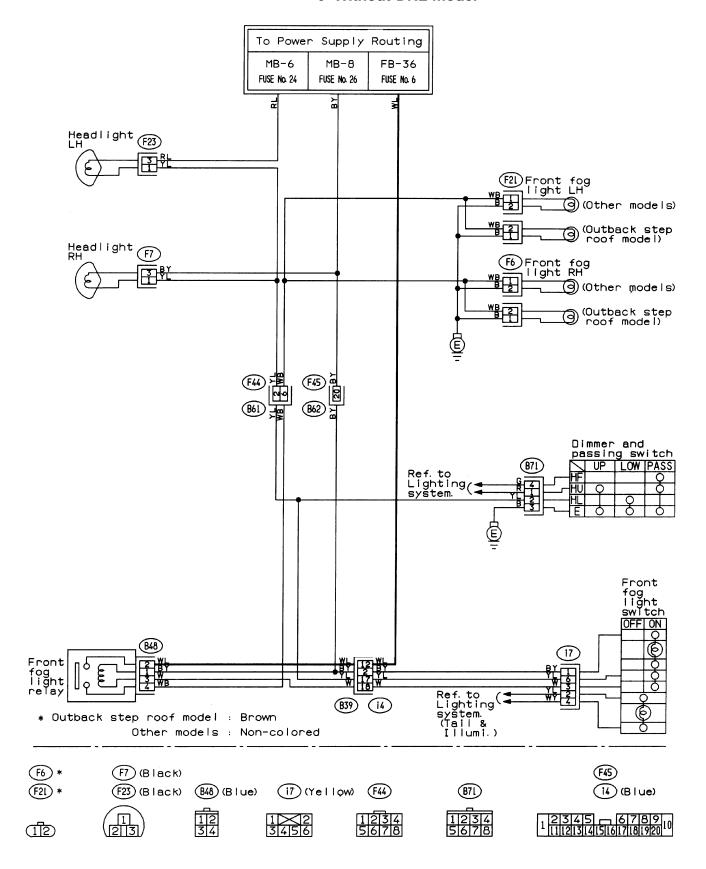


14. FRONT FOG LIGHT SYSTEM

With DRL model

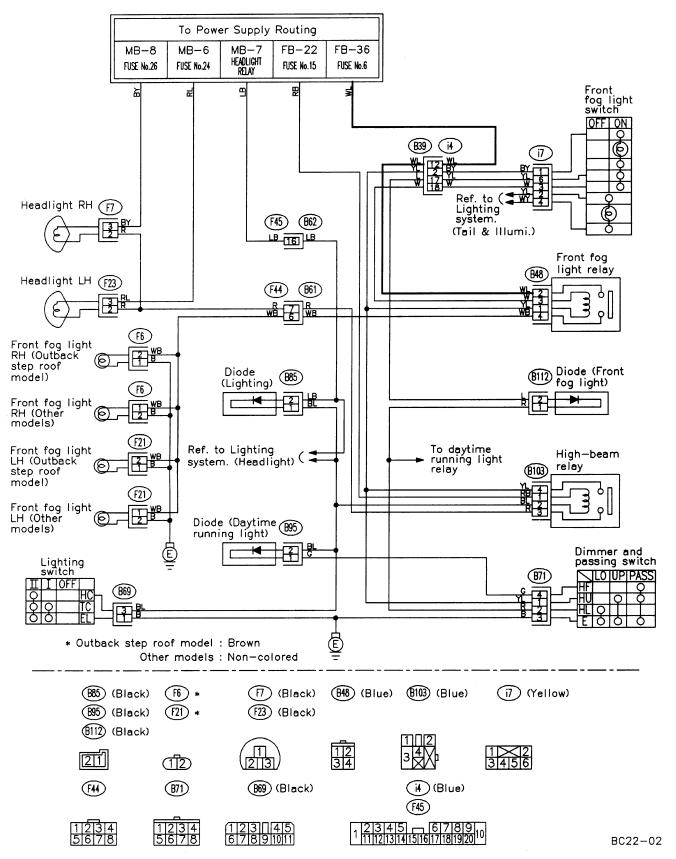


15. FRONT WIPER AND WASHER SYSTEM

LHD model

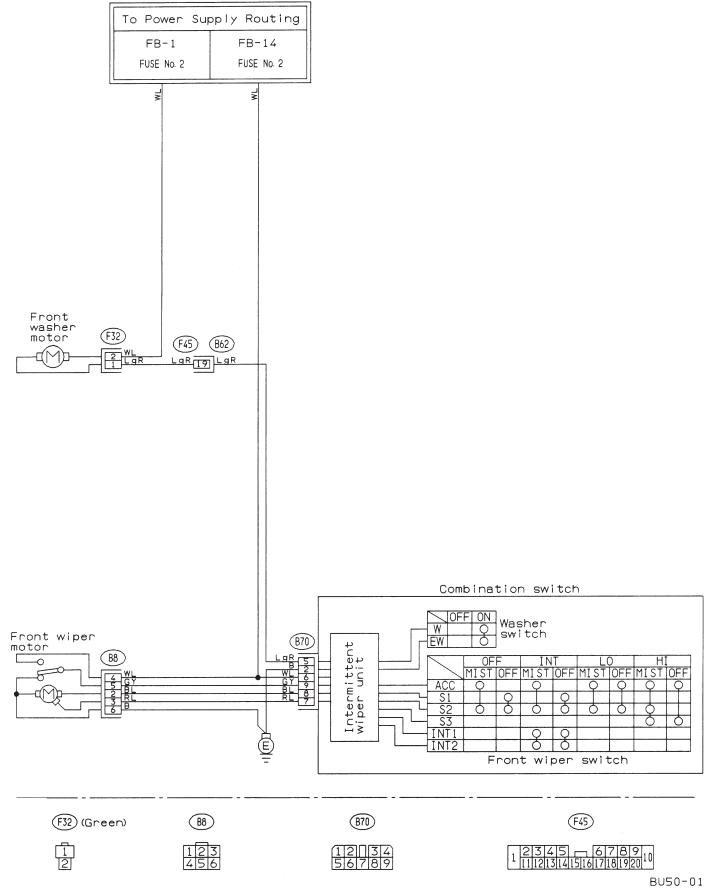


65

15. FRONT WIPER AND WASHER SYSTEM

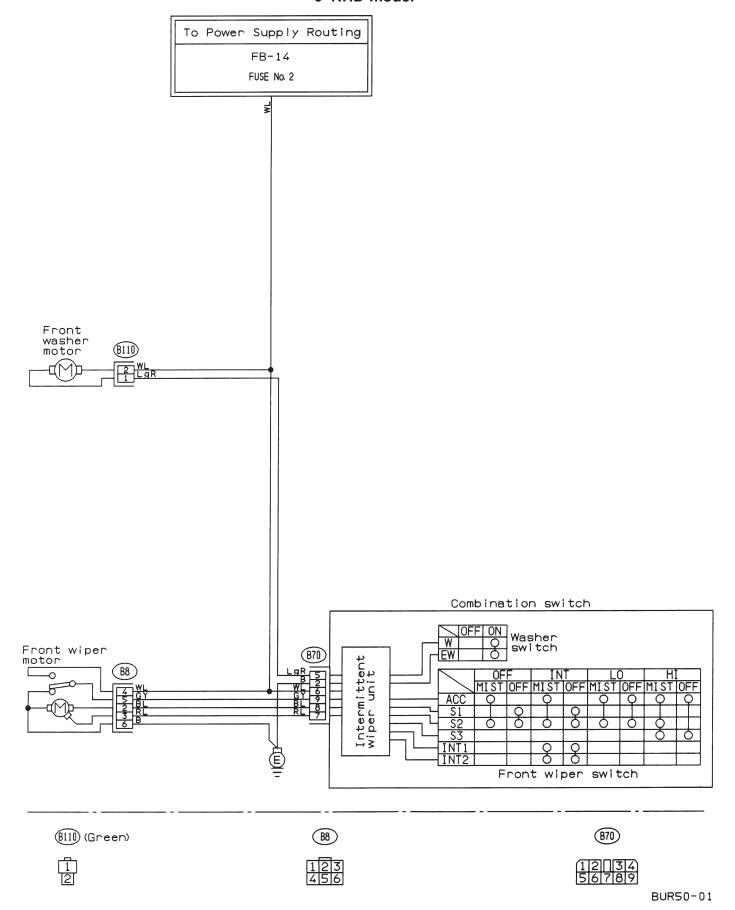


16. FUEL GAUGE SYSTEM

LHD model

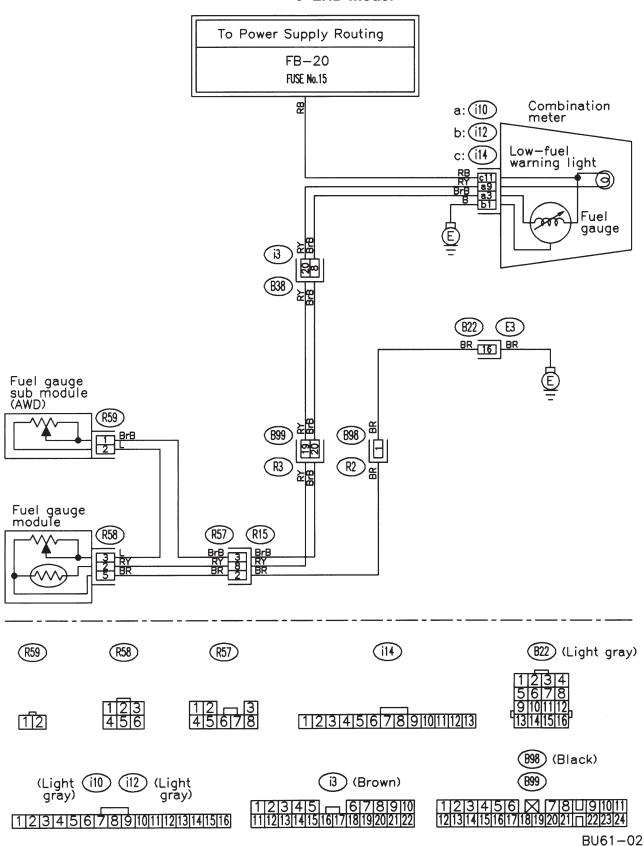


16. FUEL GAUGE SYSTEM

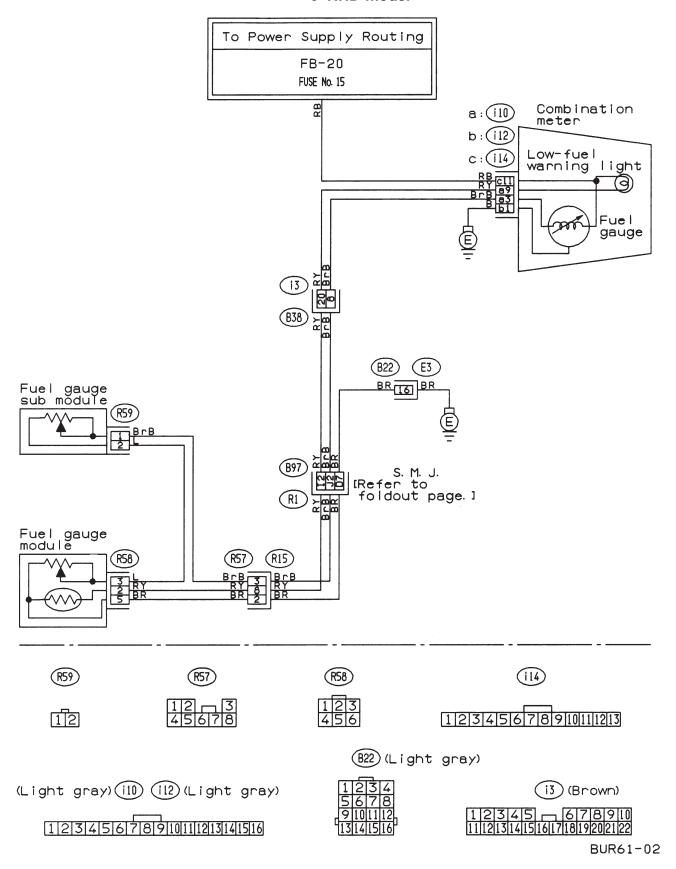

BU74-02


17. HORN AND FRONT ACCESSORY POWER SUPPLY SYSTEM


LHD model

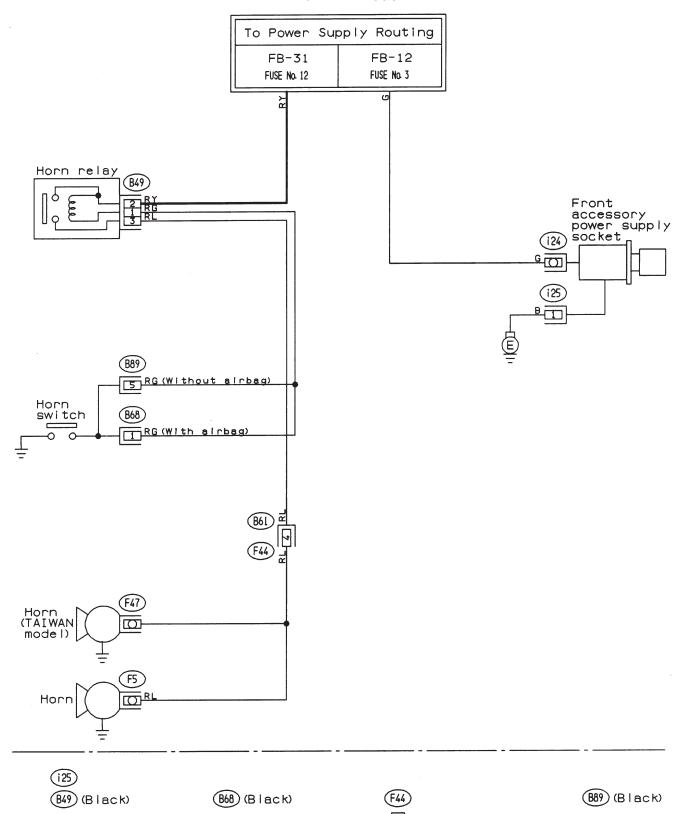

17. HORN AND FRONT ACCESSORY POWER SUPPLY SYSTEM

RHD model

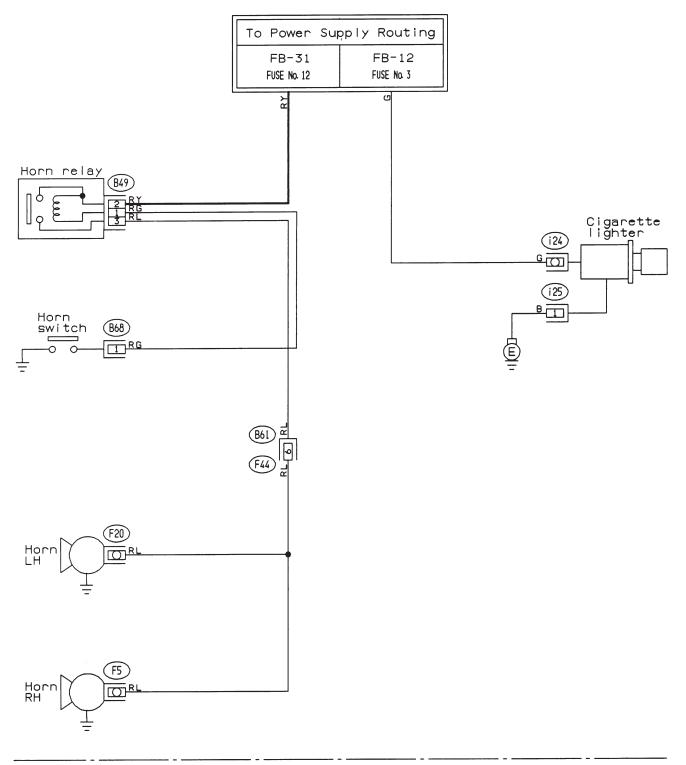








868 (Black)

6-3


18. LIGHTING (HEADLIGHT) SYSTEM


• LHD without DRL model

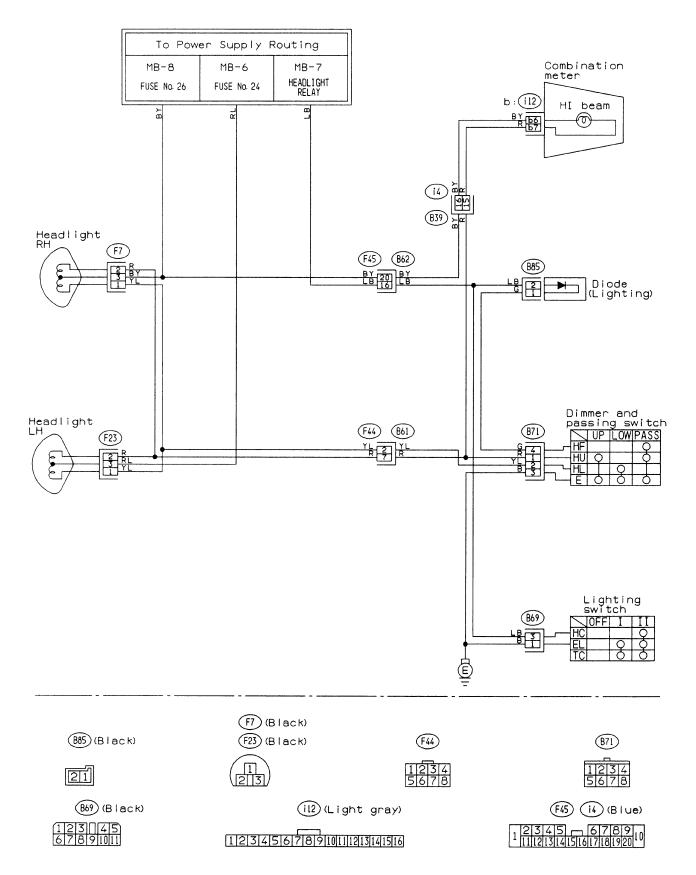


18. LIGHTING (HEADLIGHT) SYSTEM

• LHD with DRL model

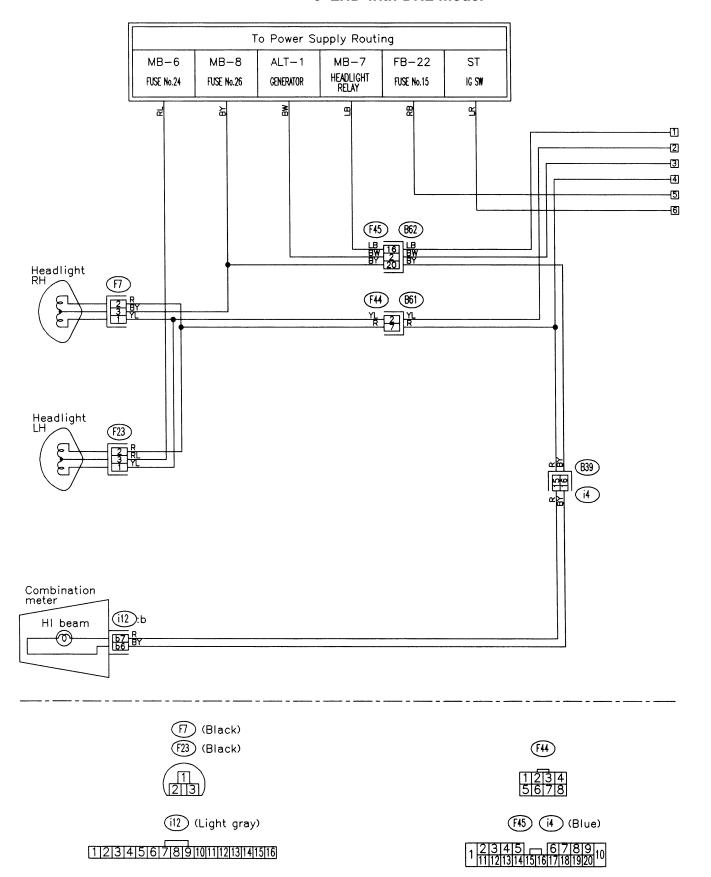


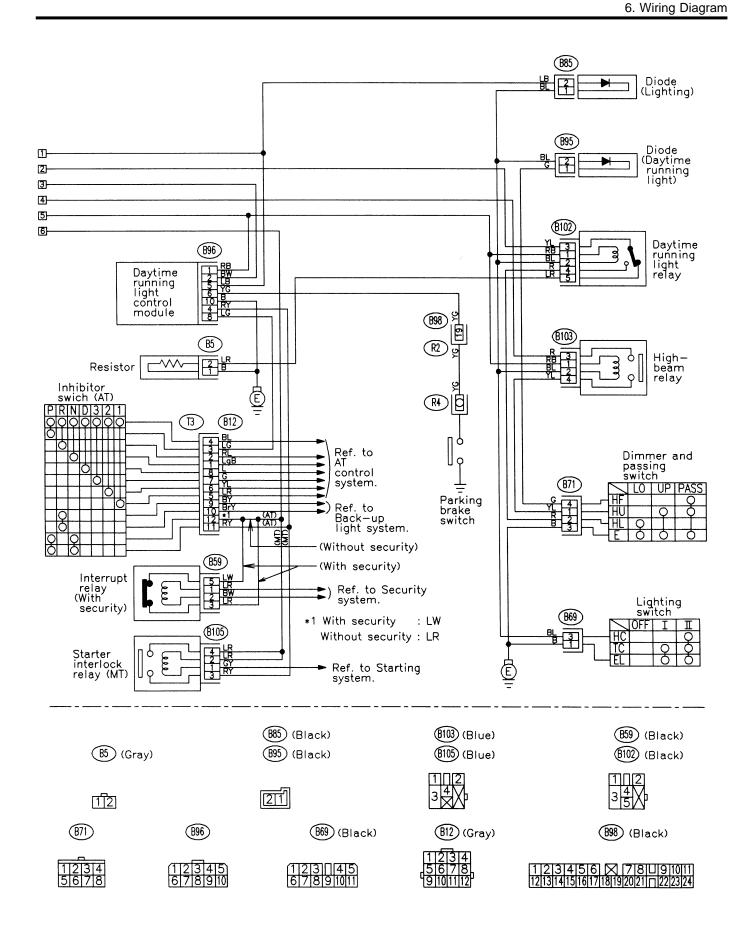


18. LIGHTING (HEADLIGHT) SYSTEM • RHD model

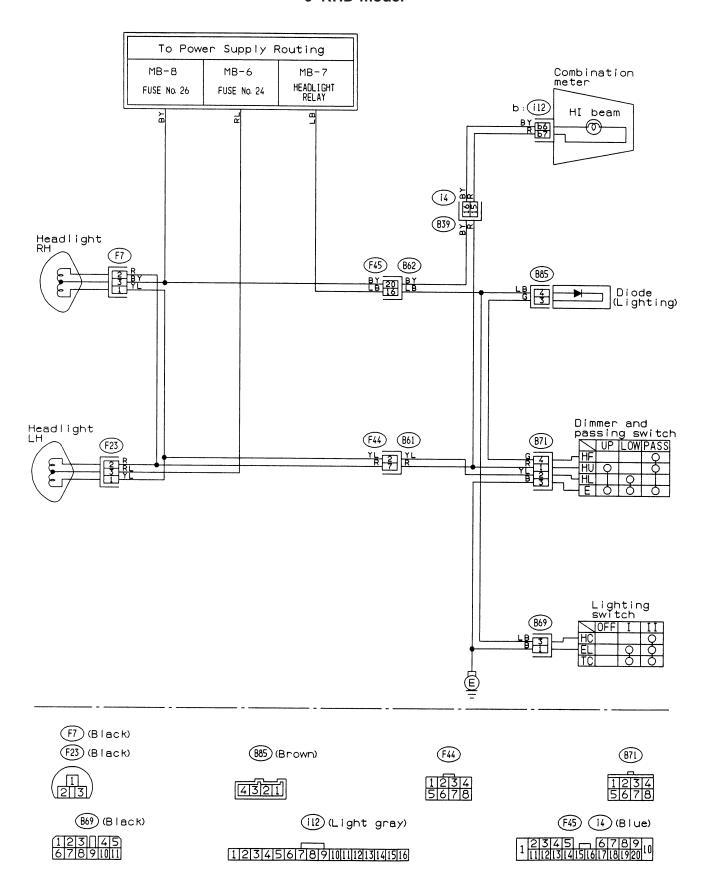


19. LIGHTING (TAIL LIGHT ILLUMINATION LIGHT ETC.) SYSTEM • LHD model

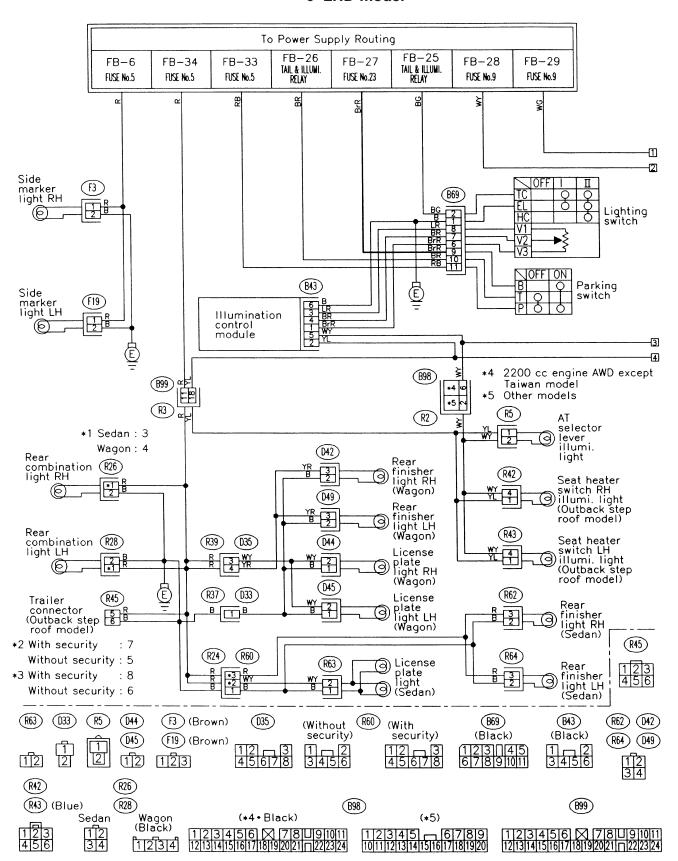


WIRING DIAGRAM

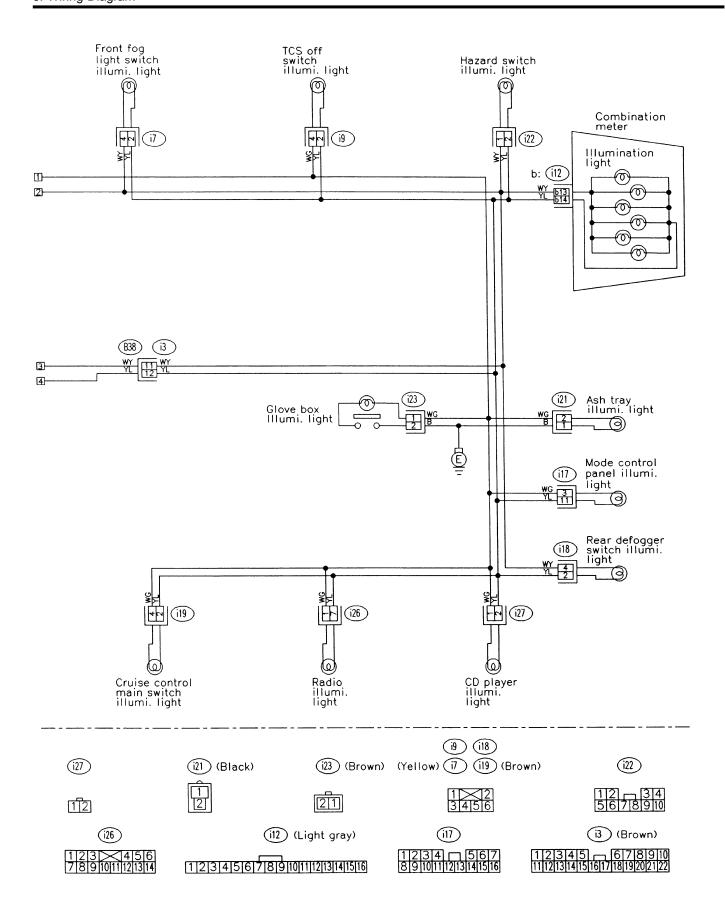


19. LIGHTING (TAIL LIGHT ILLUMINATION LIGHT ETC.) SYSTEM ● RHD model

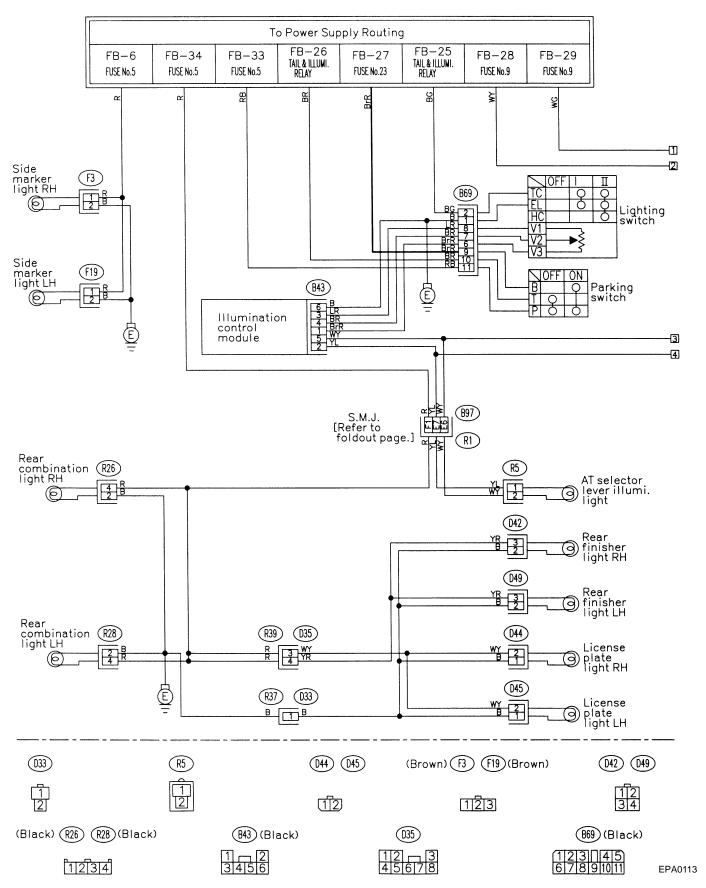


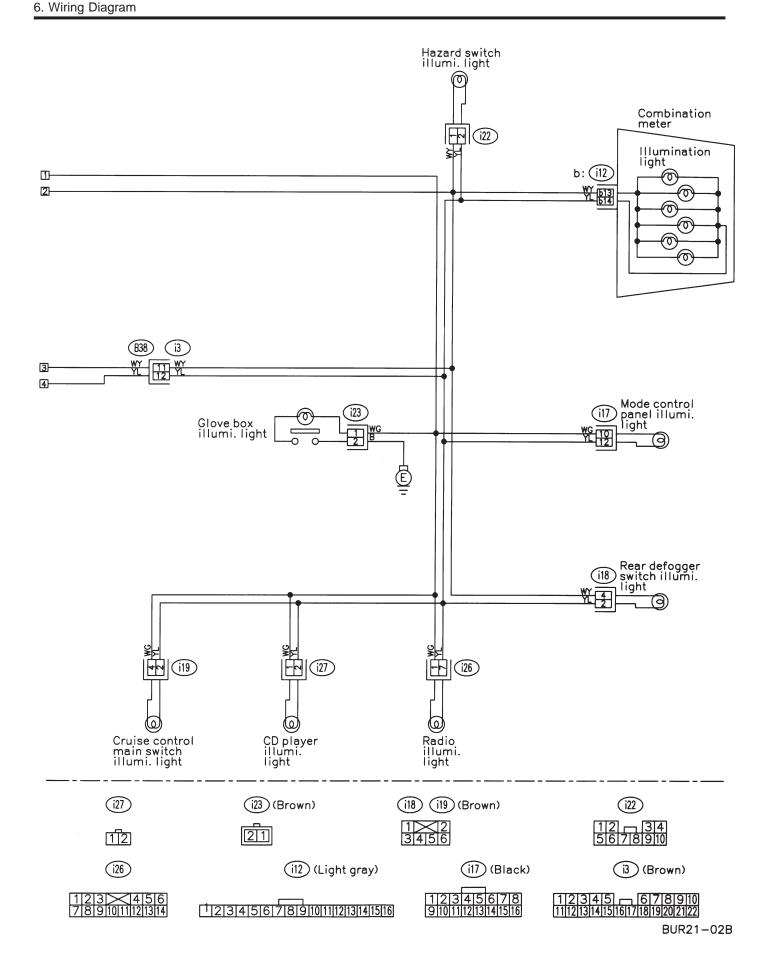


20. OIL PRESSURE AND TEMPERATURE GAUGE SYSTEM

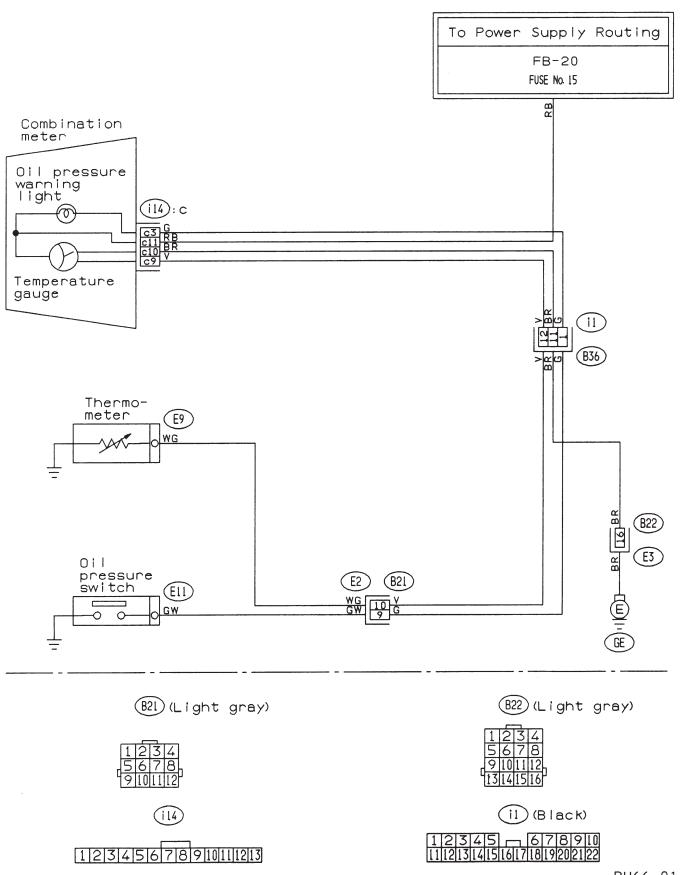

21. PARKING BRAKE AND BRAKE FLUID LEVEL WARNING SYSTEM

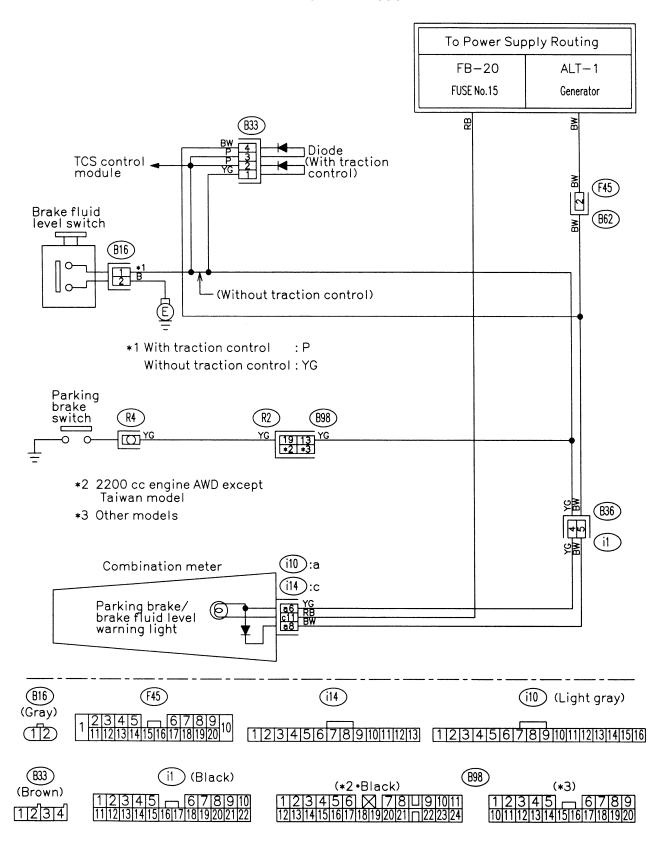


21. PARKING BRAKE AND BRAKE FLUID LEVEL WARNING SYSTEM

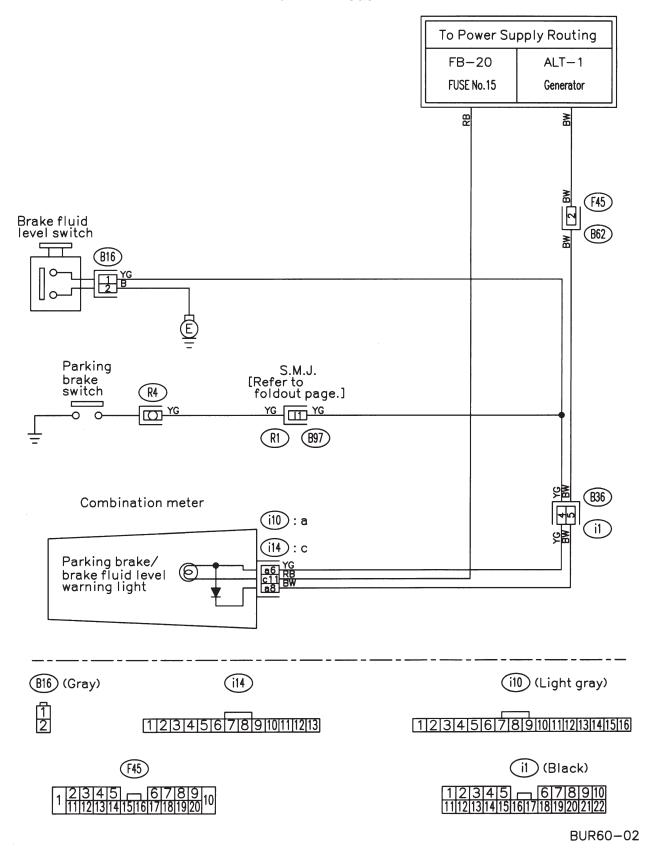


22. POWER WINDOW SYSTEM


LHD model

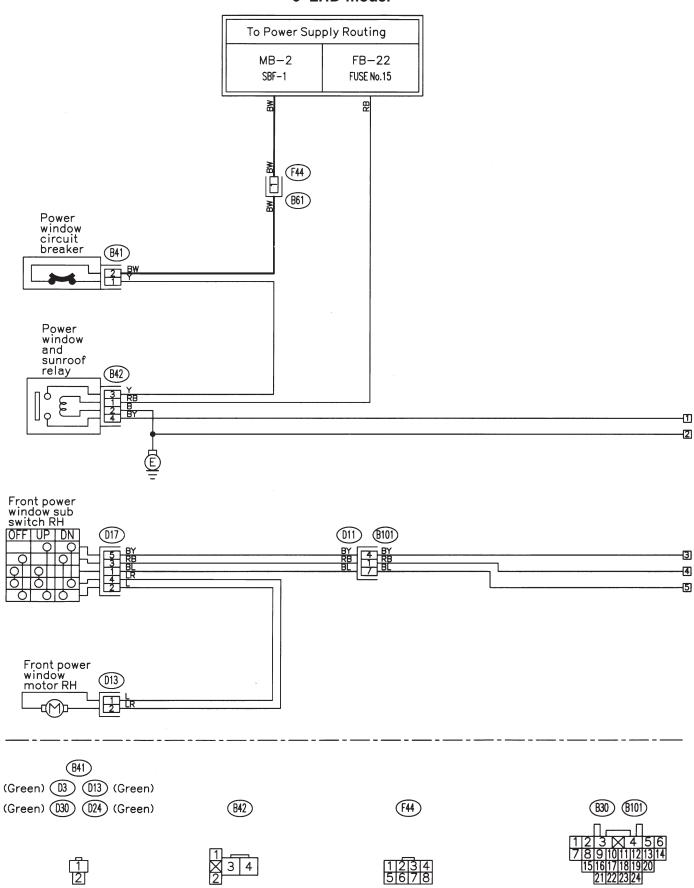


BU70-03A

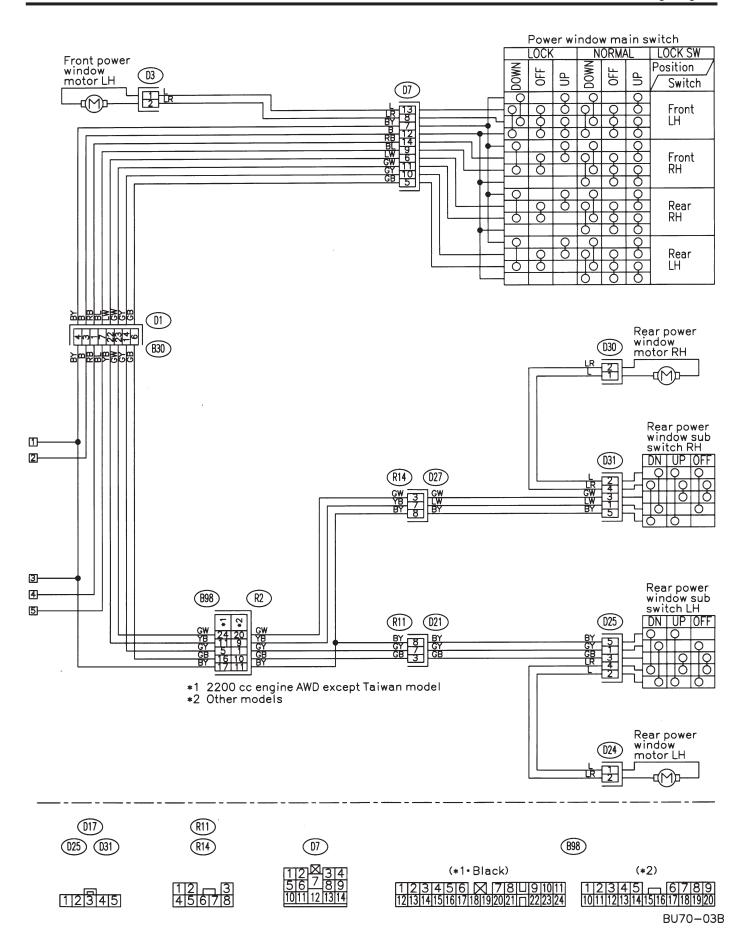


22. POWER WINDOW SYSTEM

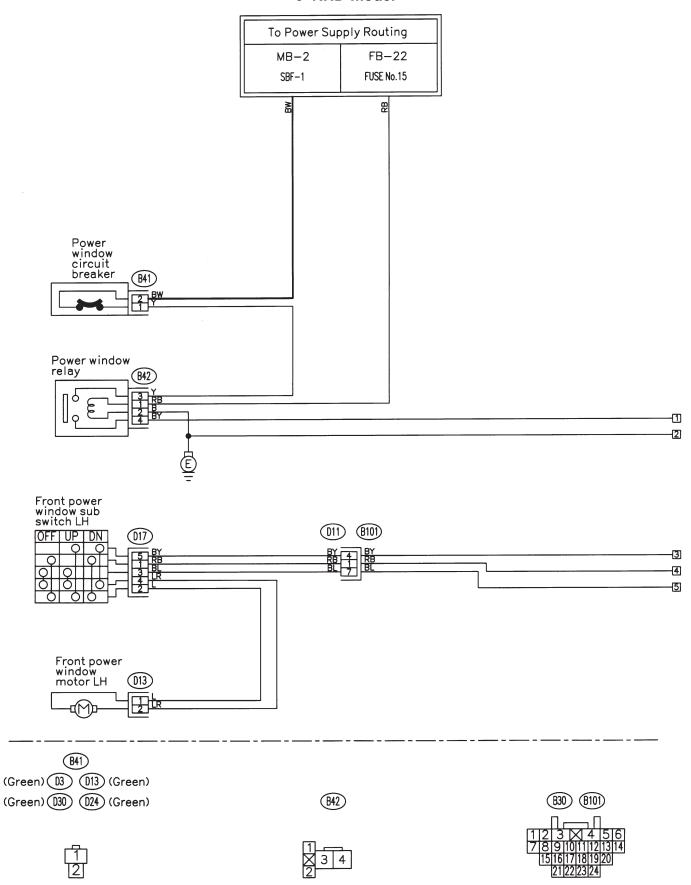

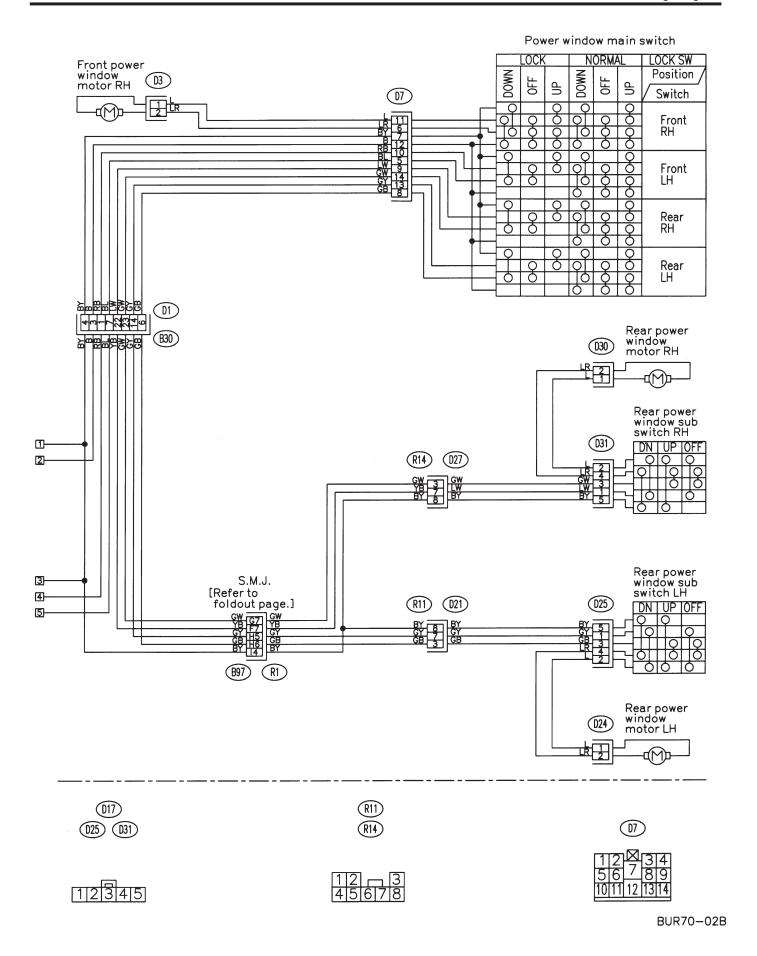


23. RADIATOR FAN SYSTEM

LHD model

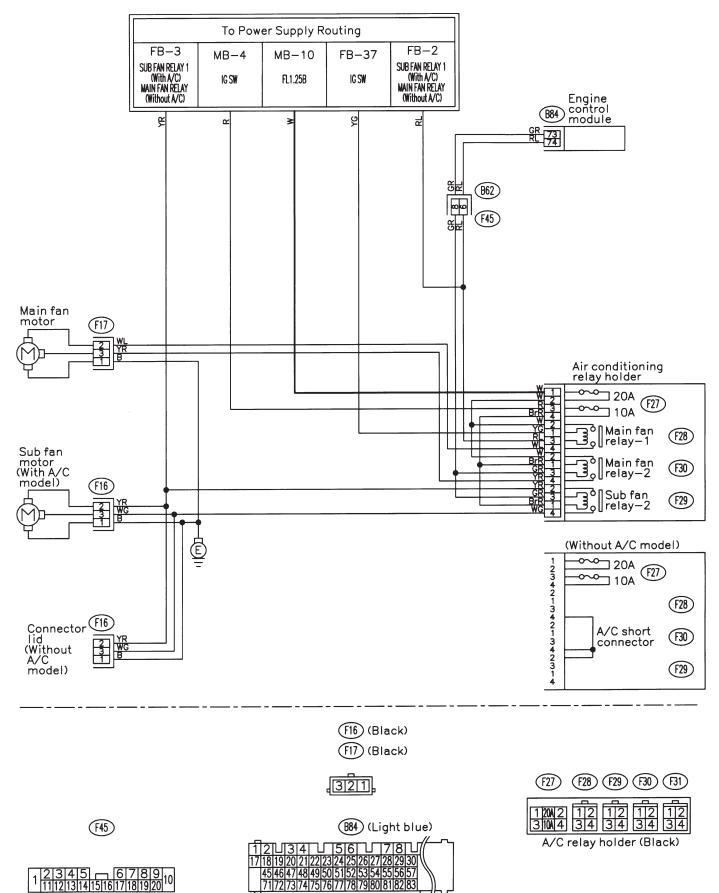


BU14-04


23. RADIATOR FAN SYSTEM

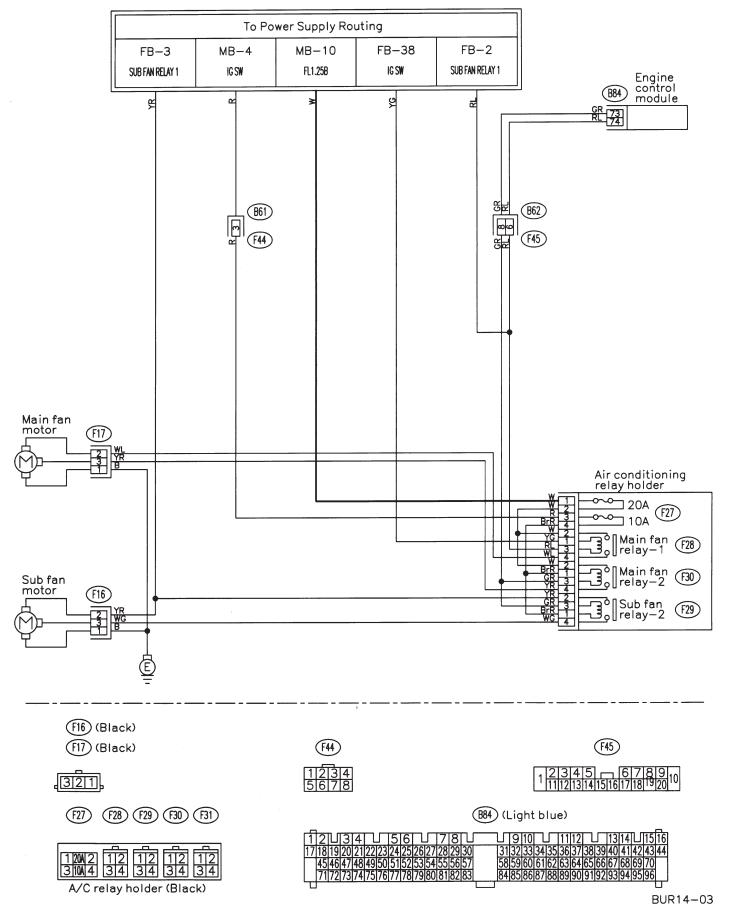


24. REAR WINDOW DEFOGGER SYSTEM

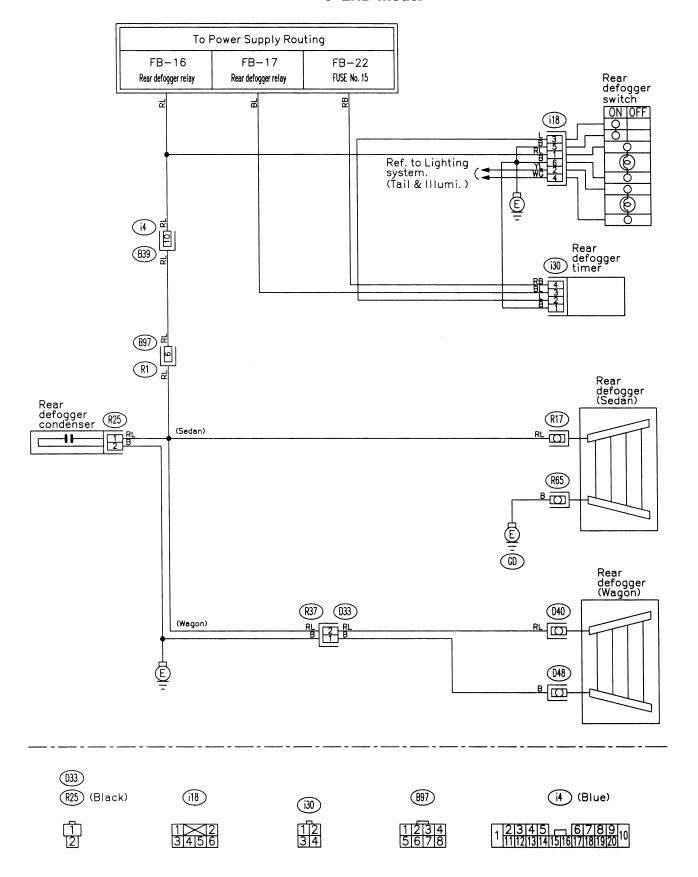


24. REAR WINDOW DEFOGGER SYSTEM

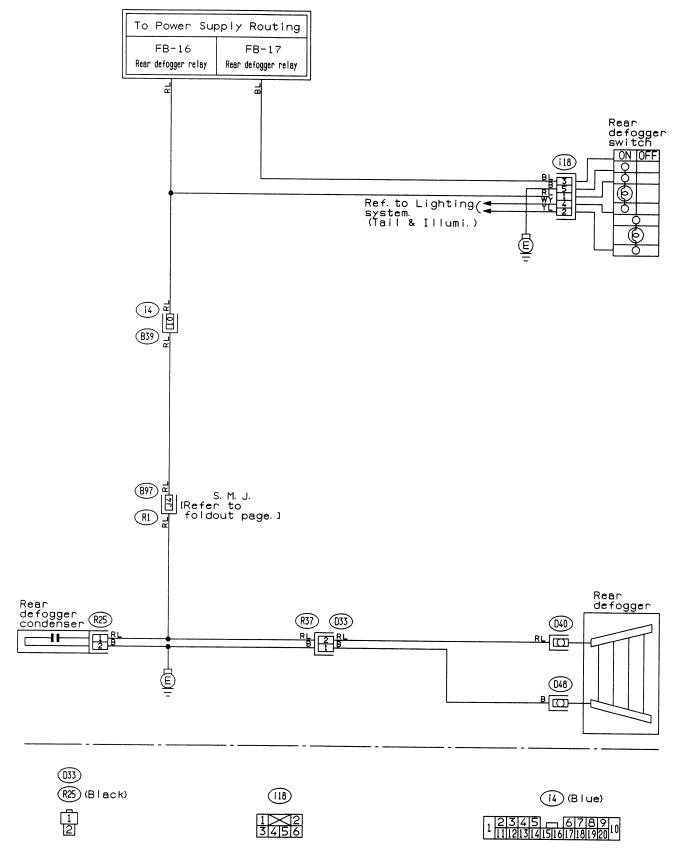


25. REAR WIPER AND WASHER SYSTEM

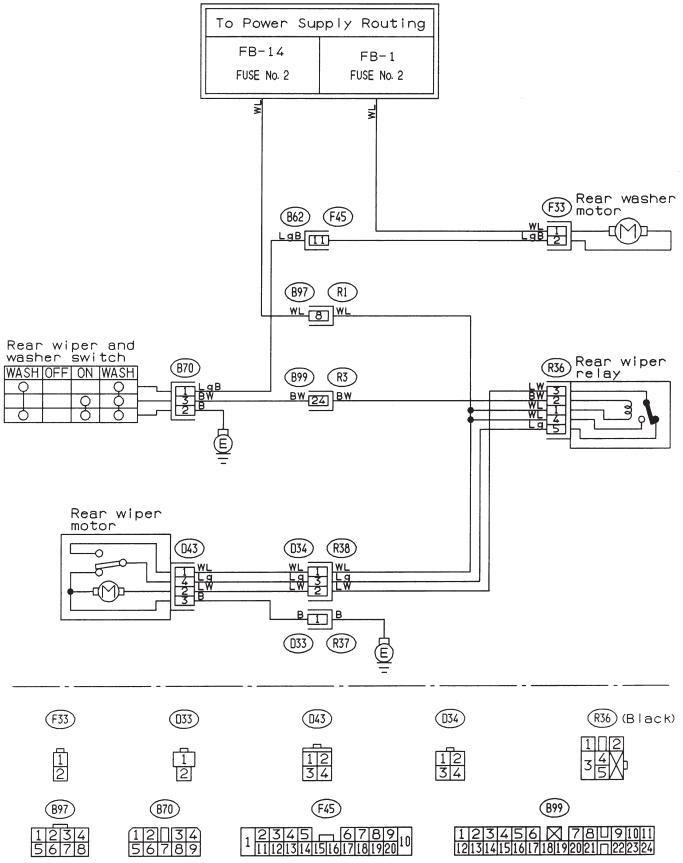


25. REAR WIPER AND WASHER SYSTEM

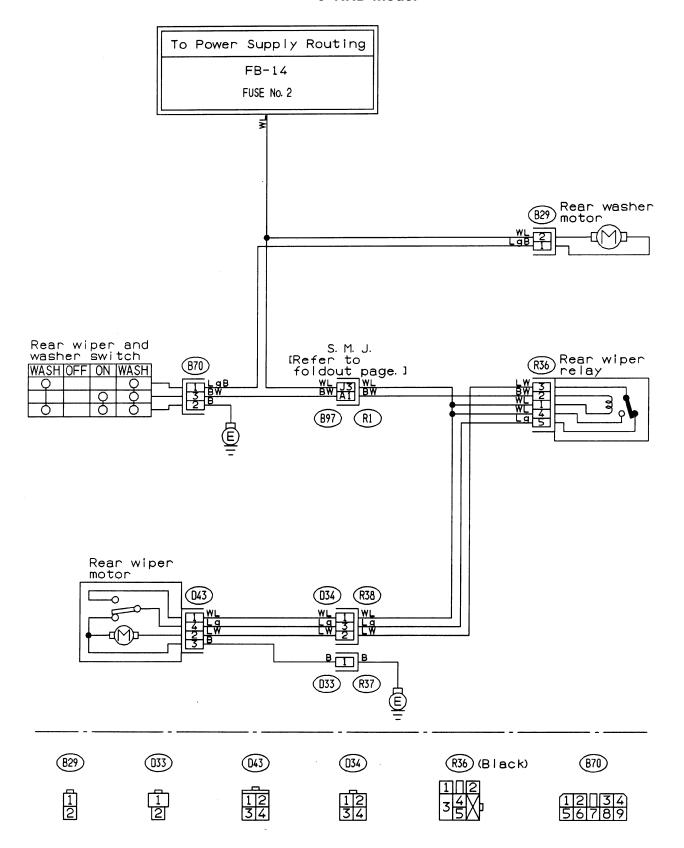


26. REMOTE CONTROL REARVIEW MIRROR SYSTEM

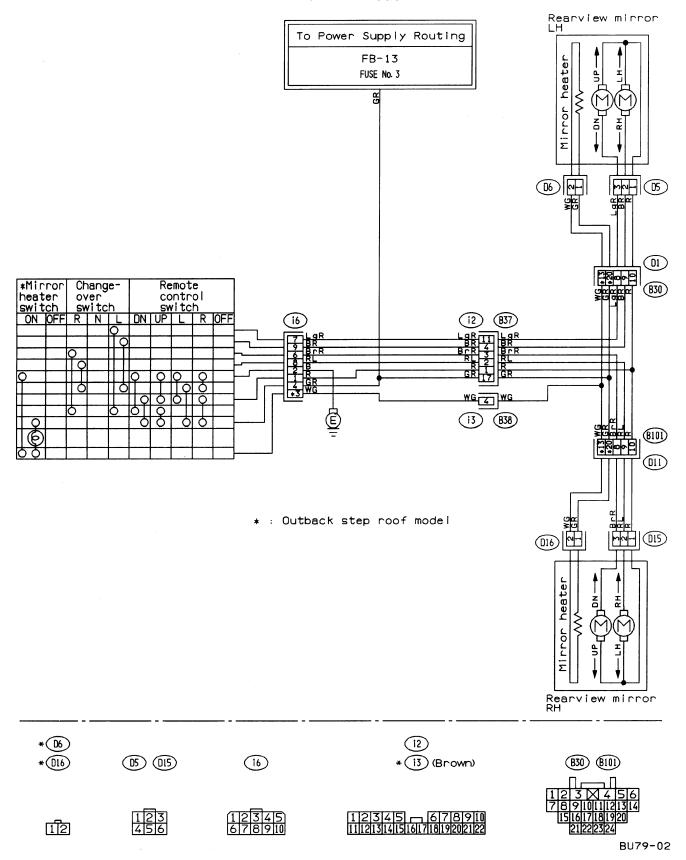


26. REMOTE CONTROL REARVIEW MIRROR SYSTEM

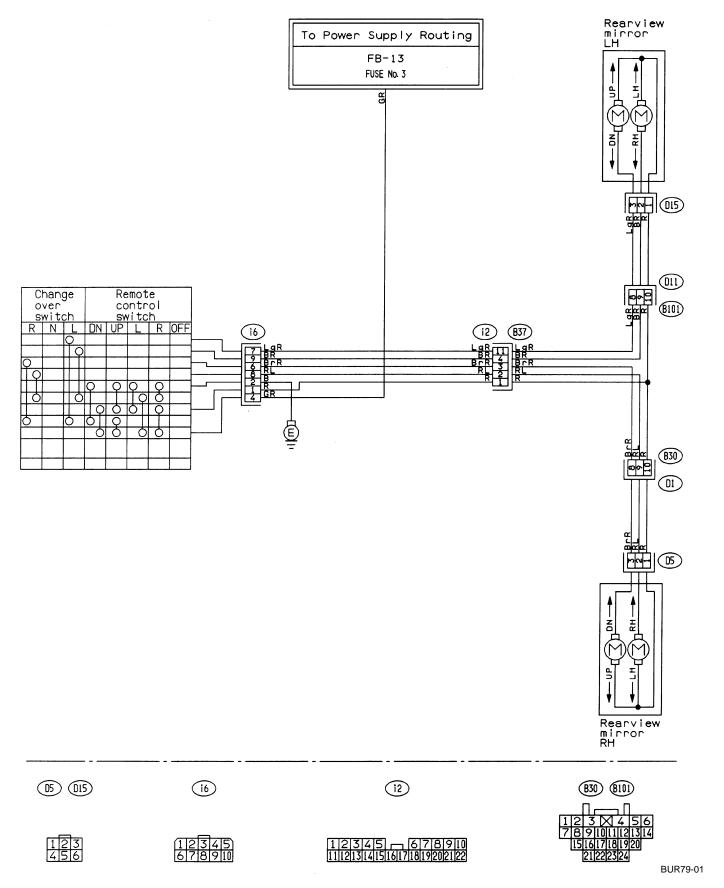


27. SEAT BELT WARNING SYSTEM

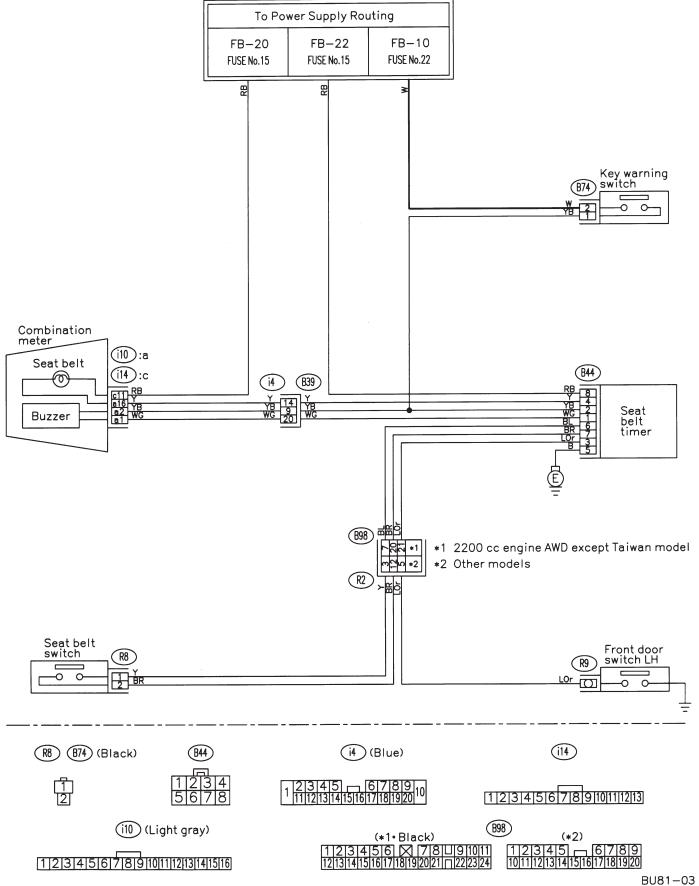


27. SEAT BELT WARNING SYSTEM

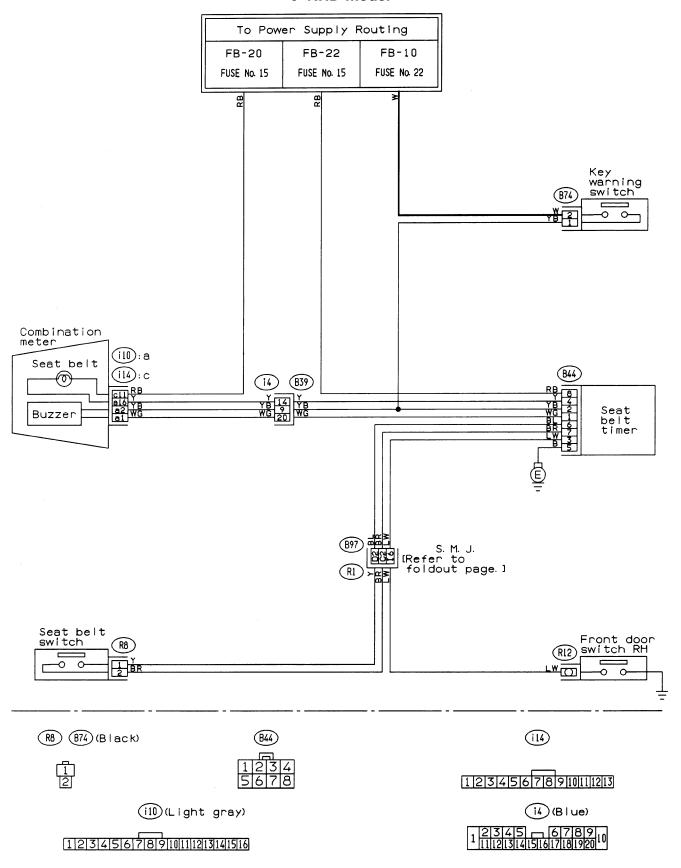


28. SECURITY SYSTEM

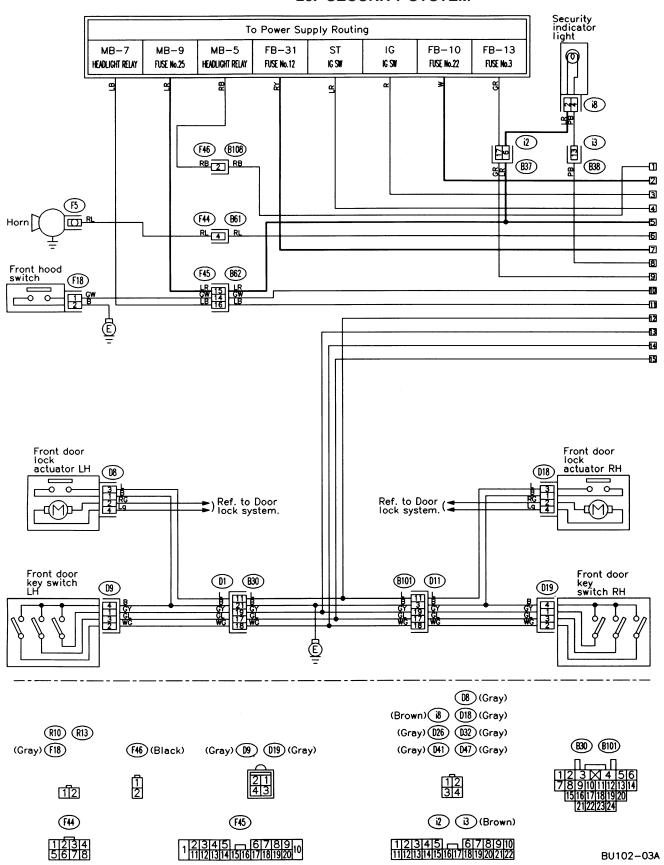


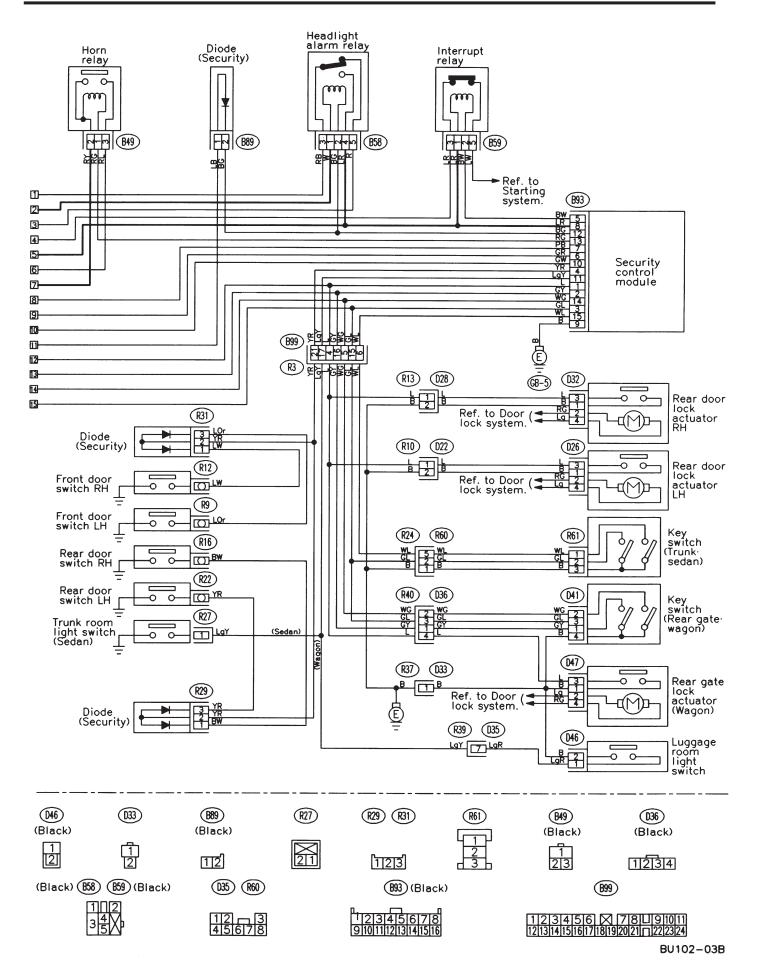


29. SPOT LIGHT, ROOM LIGHT, LUGGAGE AND TRUNK ROOM LIGHT SYSTEM

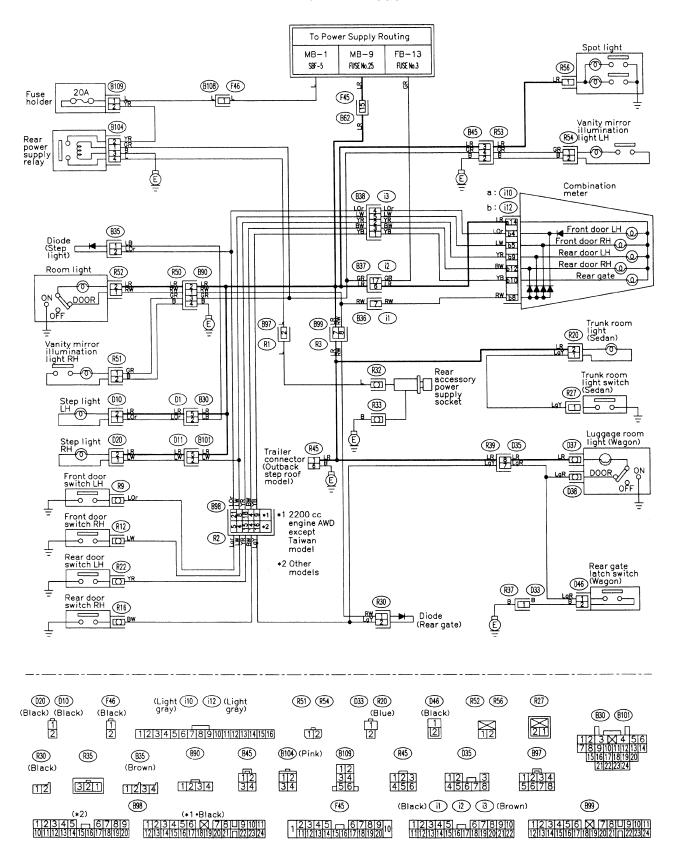


29. SPOT LIGHT, ROOM LIGHT, LUGGAGE AND TRUNK ROOM LIGHT SYSTEM

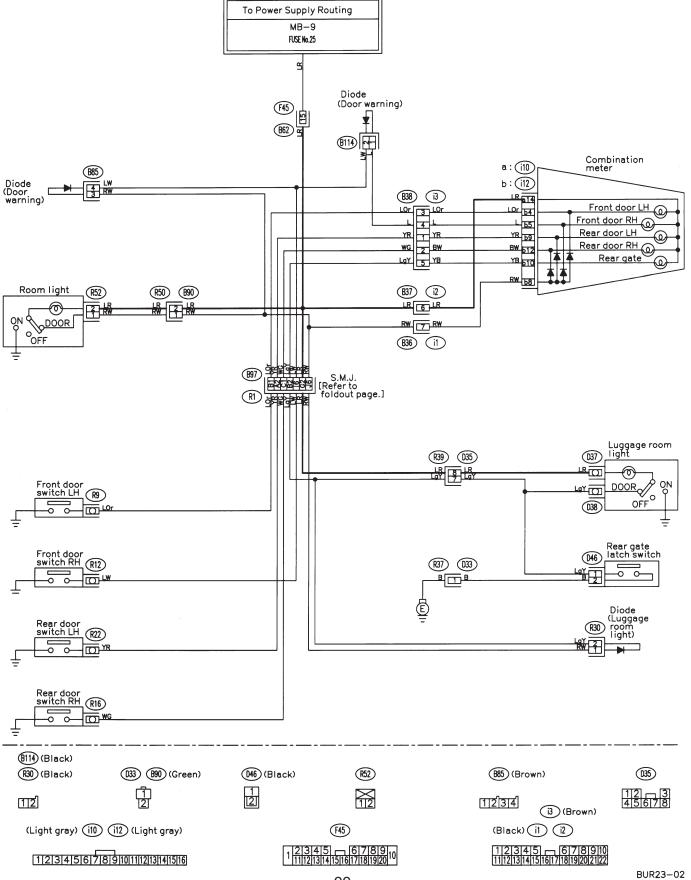


30. SRS (AIRBAG SYSTEM)

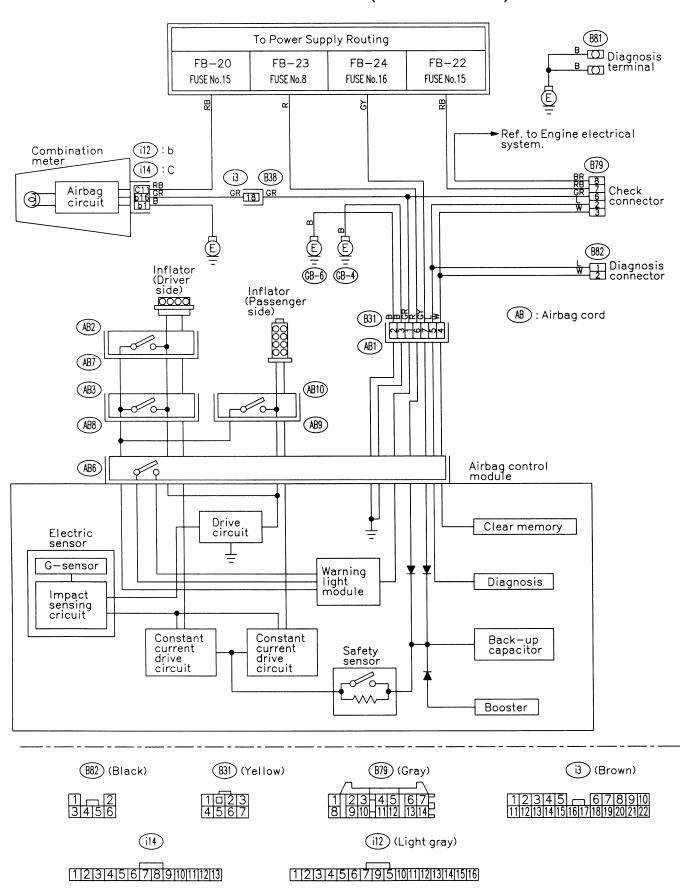


31. STARTING SYSTEM

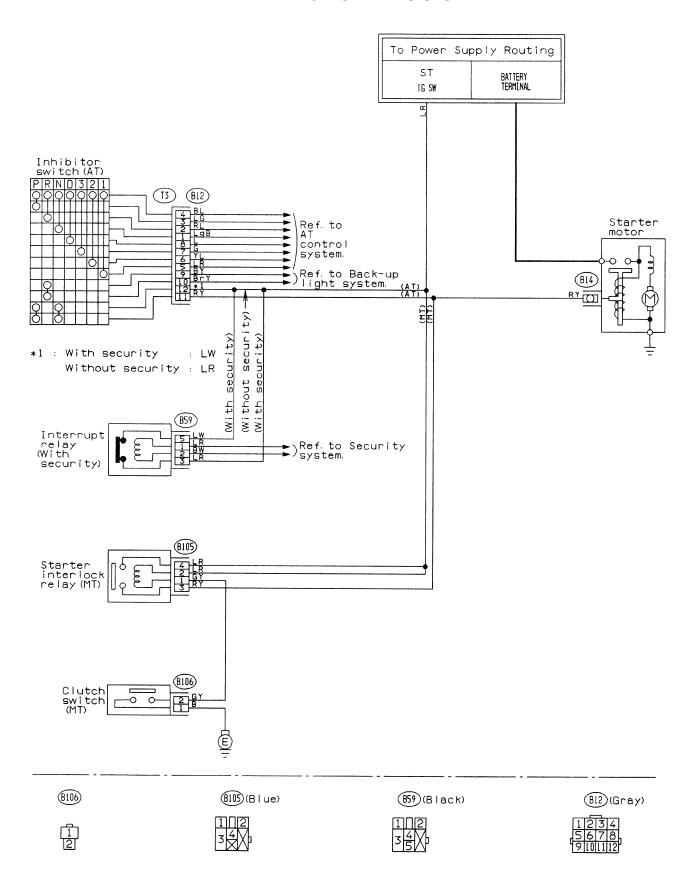


32. STOP LIGHT SYSTEM

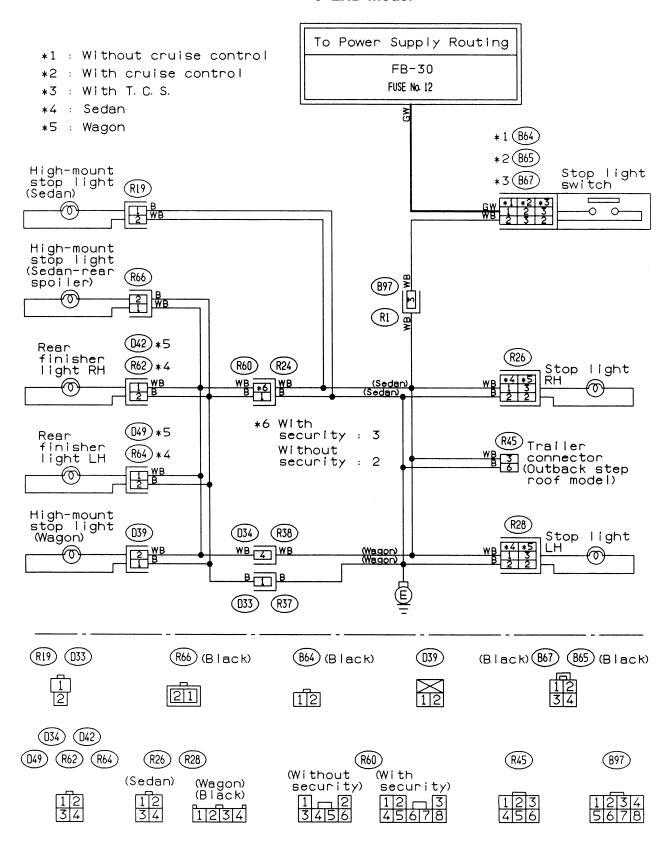


32. STOP LIGHT SYSTEM

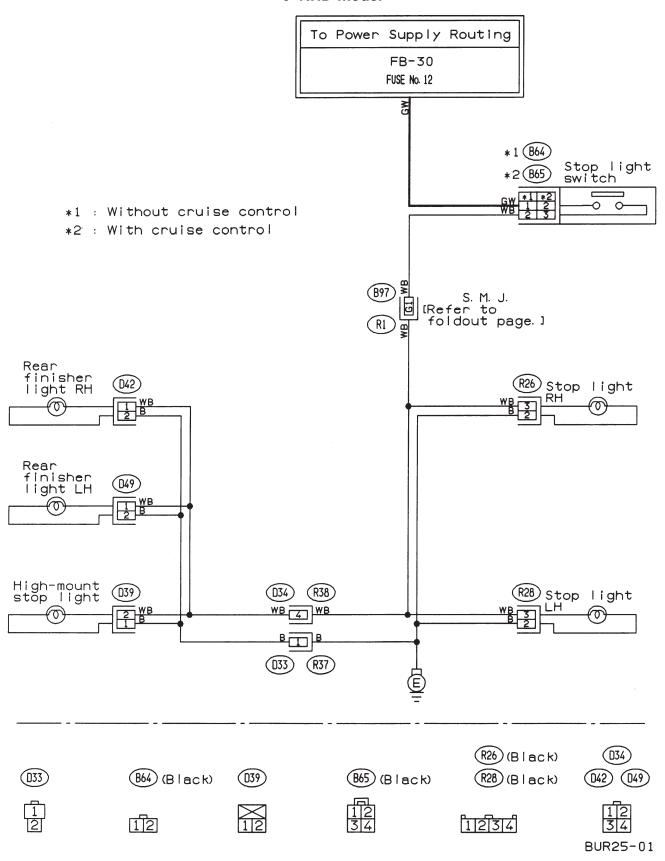


33. SUNROOF SYSTEM

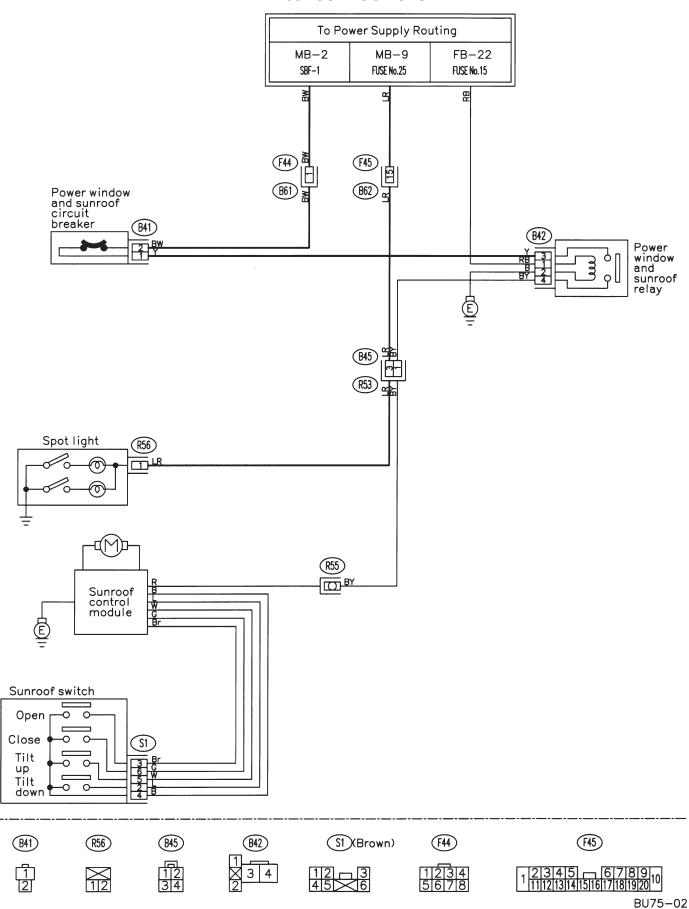


34. TRACTION CONTROL SYSTEM

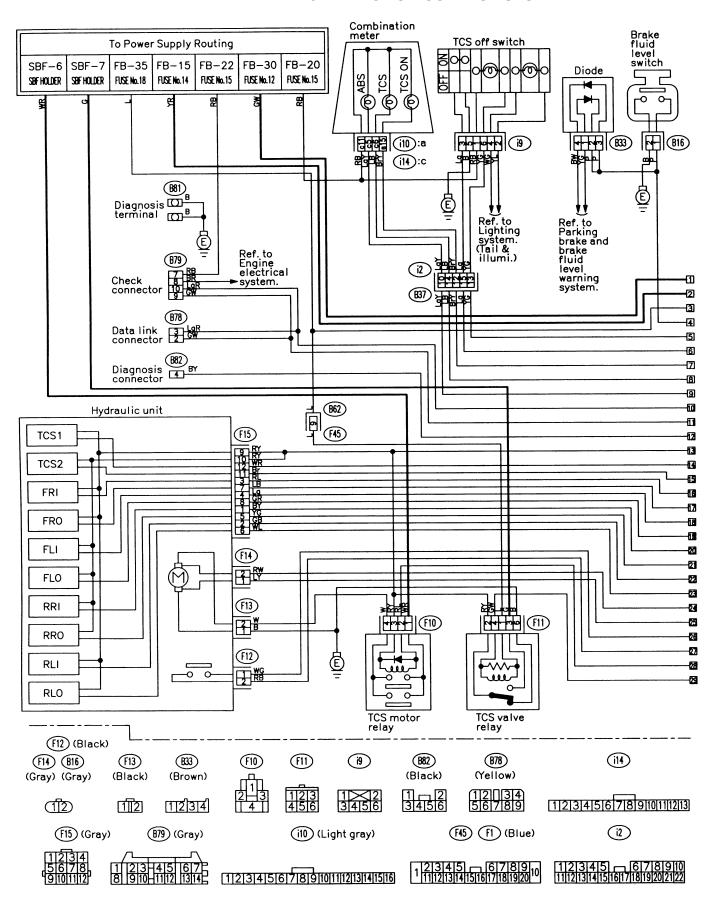


WIRING DIAGRAM

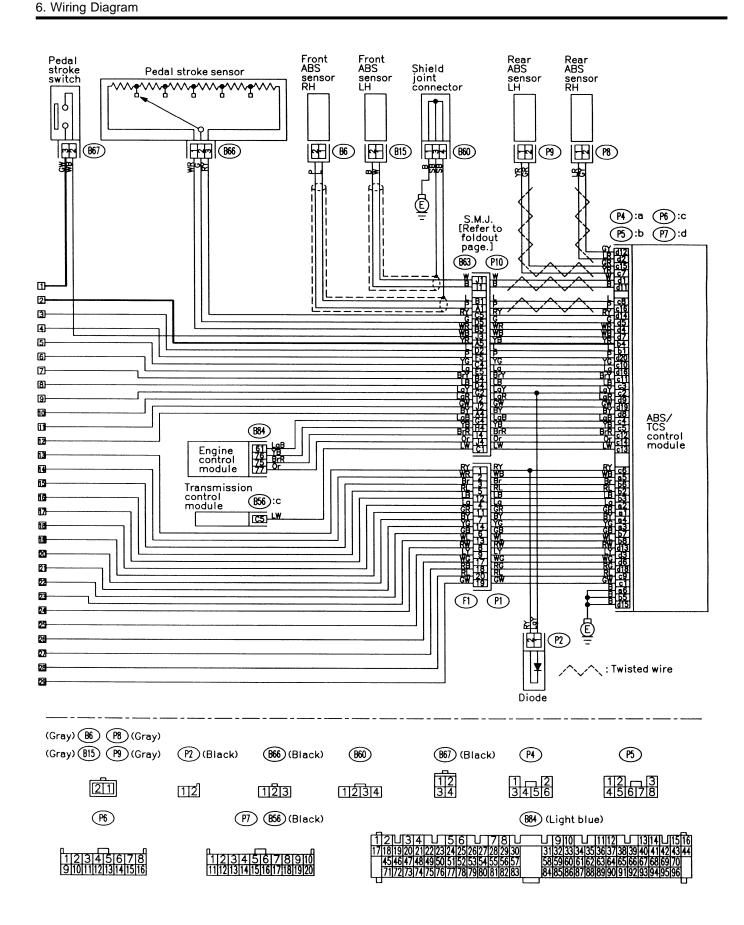


35. TURN SIGNAL AND HAZARD SYSTEM

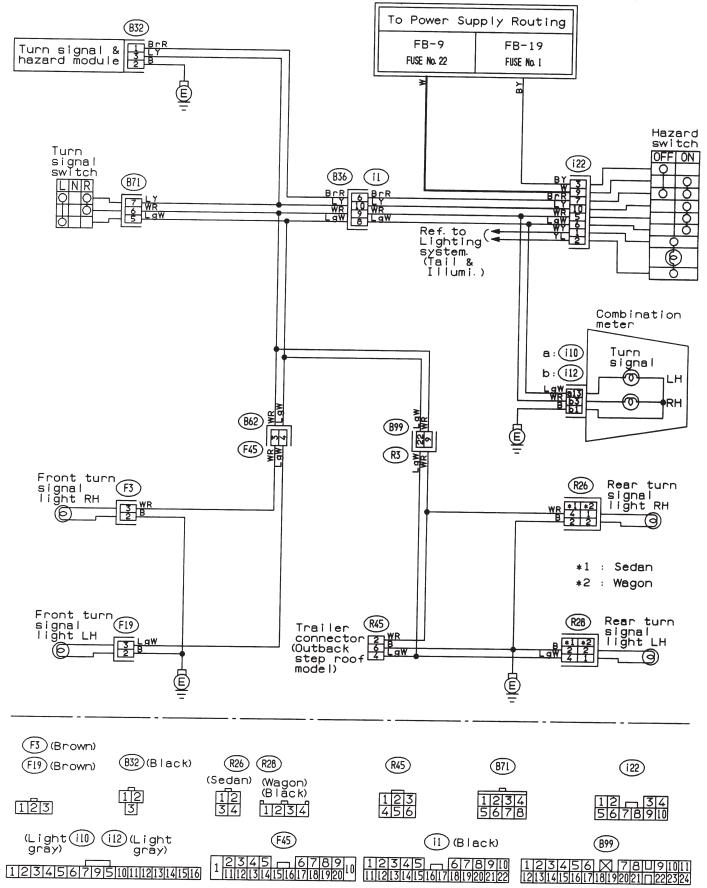

35. TURN SIGNAL AND HAZARD SYSTEM

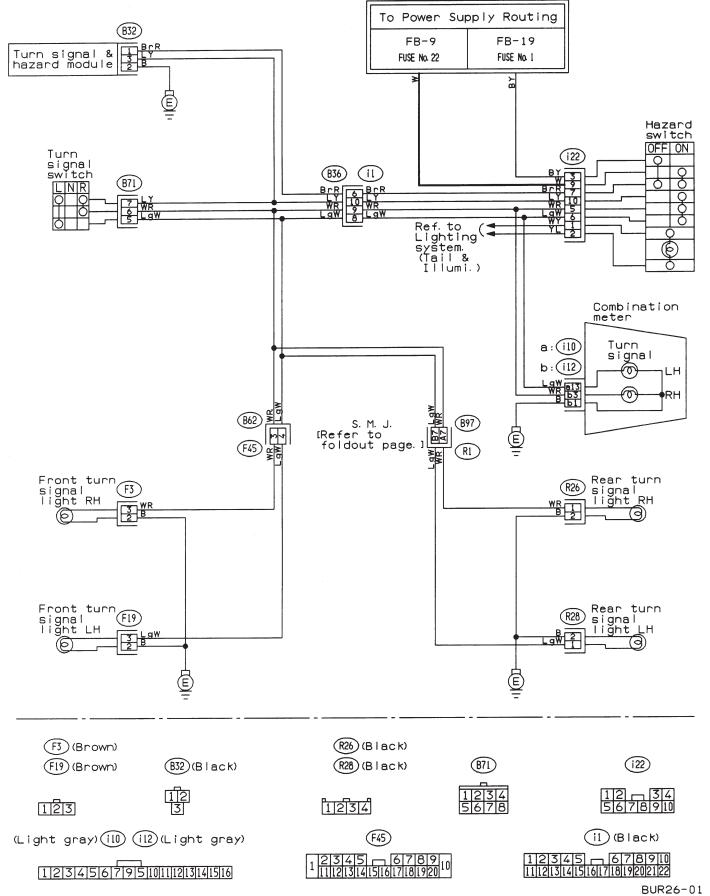

36. SEAT HEATER SYSTEM

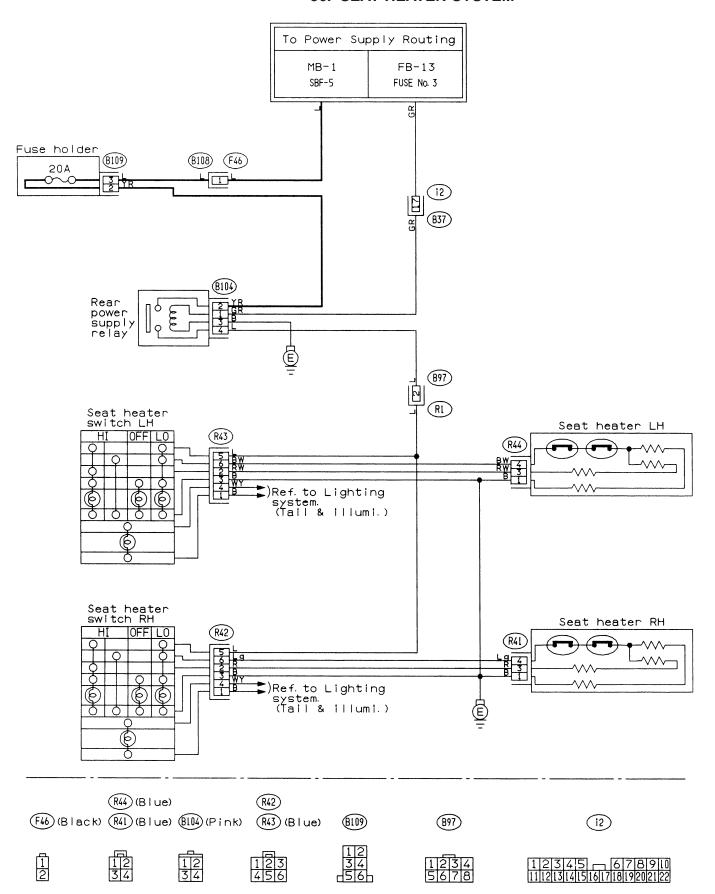


7. Electrical Unit Location

Electrical unit	Refer to;
A.B.S. control module	4-4a [T300]
A.B.S. G sensor (MT)	4-4a [T300]
A/C compressor relay	1
A/C fuse	11)
A/C main fan relay 1	10
A/C main fan relay 2	8
A/C pressure switch	2
A/C sub fan relay 2	9
ATF temperature sensor	2-7 [T2B1]
Blower motor resistor	3 6
Blower relay	(13)
Camshaft position sensor	2-7 [T2A2]
Check connector	(3)
Clutch switch (MT)	6-2 [T300]
Crankshaft position sensor	2-7 [T2A2]
Cruise control module	6-2 [T300]
Cruise control pump	6-2 [T300]
Data link connector (for OBD-II G.S.T.)	2-7 [T2A1]
Data link connector (for S.S.M.)	2-7 [T2A1]
Diagnosis connector	4-4a [T300]
Diagnosis terminal (Ground)	4-4a [T300]
Door lock timer	1
Engine control module	2-7 [T2A1]
Engine coolant temperature sensor	2-7 [T2A2]
Engine hood switch (Security)	6-2 [K6A0]
Evaporator thermoswitch	29
F/B	15)
FRESH/RECIRC actuator	38
Fuel pump relay	2-7 [T2A3]
Fuel gauge module	3)
Fuel gauge sub module (AWD)	30
FWD switch (AT)	1
Headlight alarm relay (Security)	6-2 [K6A0]
Headlight relay LH	\$
Headlight relay RH	6
Horn relay	(14)

Electrical unit	Refer to;
Hydraulic unit (A.B.S.)	4-4a [T300]
Ignition coil	2-7 [T2A3]
Ignitor	2-7 [T2A3]
Idle air control solenoid valve	2-7 [T2A3]
Illumination control module	(1)
Inhibitor switch	6-2 [T300]
Knock sensor	2-7 [T2A2]
Main fan relay	19
Main relay	2-7 [T2A3]
Mass air flow sensor	2-7 [T2A2]
Mode actuator	10
M/B	4
Oil pressure switch	3
Oxygen sensor	2-7 [T2A2]
Pedal stroke sensor (T.C.S.)	4-4b [T300]
Power window and sunroof relay	24)
Power window circuit breaker	(3)
Purge control solenoid valve	2-7 [T2A3]
Rear defogger relay	17
Seat belt timer	20
Security control module	6-2 [K6A0]
Shift lock control module	(2)
Starter interrupt relay (Security)	6-2 [K6A0]
Stop & brake switch (With cruise control)	6-2 [T300]
Sunroof control module	30
Tail and illumination relay	(18)
T.C.S. control module	4-4b [T300]
T.C.S. motor relay	4-4b [T300]
T.C.S. valve relay	4-4b [T300]
Throttle position sensor	2-7 [T2A2]
Test mode connector	2-7 [T2A1]
Transmission control module	2-7 [T2B1]
Turn & hazard module	16
Vehicle speed sensor 1	2-7 [T2B1]
Vehicle speed sensor 2	2-7 [T2B1]

1. ENGINE ROOM

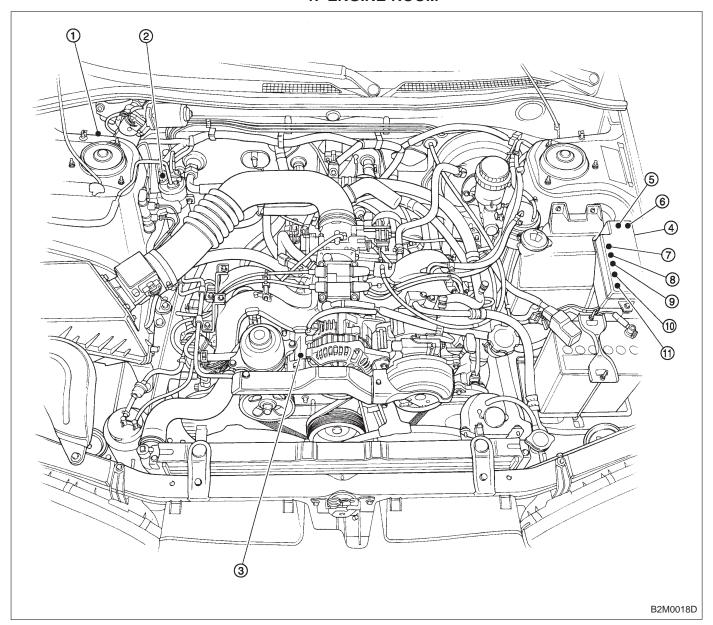


- ① FWD switch (AT)
- A/C pressure switch 2
- Oil pressure switch
 M/B
 Headlight relay LH Oil pressure switch

- Headlight relay RH

- ① A/C compressor relay
- A/C main fan relay 2
- A/C sub fan relay 2
- A/C main fan relay 1
- ① A/C fuse

2. INSTRUMENT PANEL

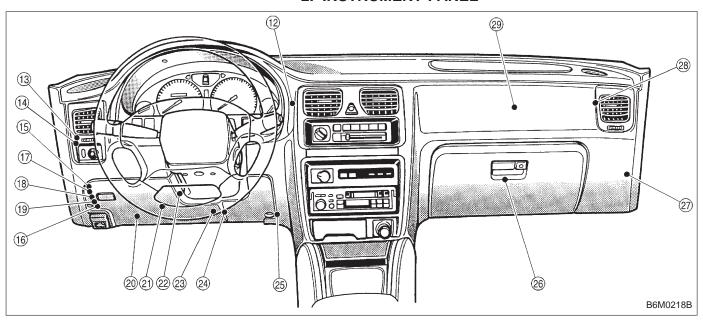


- Mode actuator
- Blower relay
- 4 Horn relay
- (15) F/B
- 16 Turn & hazard module
- Rear defogger relay
- ® Tail & illumination relay
- Main fan relay
- Seat belt timer

- Illumination control module
- Shift lock control module
- ② Power window circuit breaker
- (4) Power window & sunroof relay
- (25) Check connector
- Blower motor resistor
- ② Door lock timer
- ® FRESH/RECIRC actuator
- ② Evaporator thermoswitch


WIRING DIAGRAM 7. Electrical Unit Location

3. COMPARTMENT

SEDAN

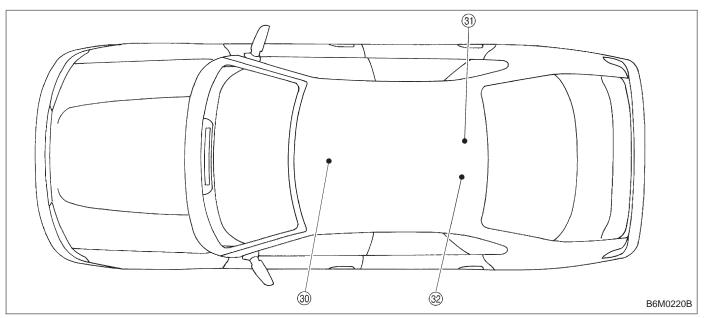


WAGON

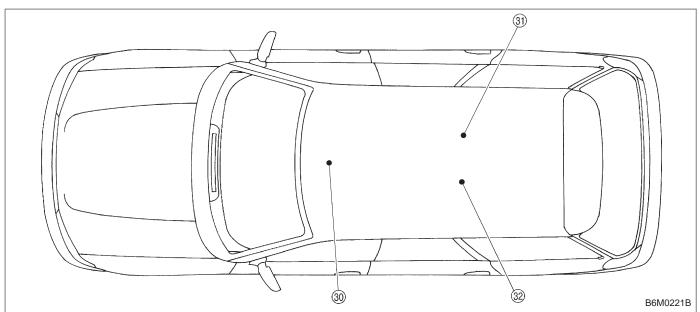


- Sunroof control module
- Fuel gauge module

② Fuel gauge sub module (AWD)


WIRING DIAGRAM

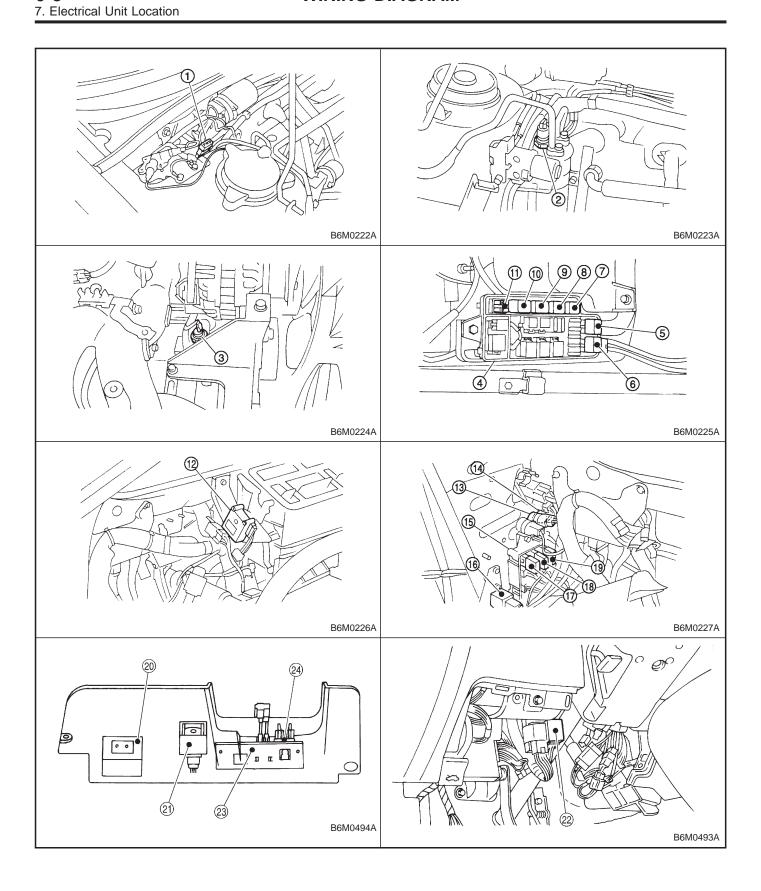

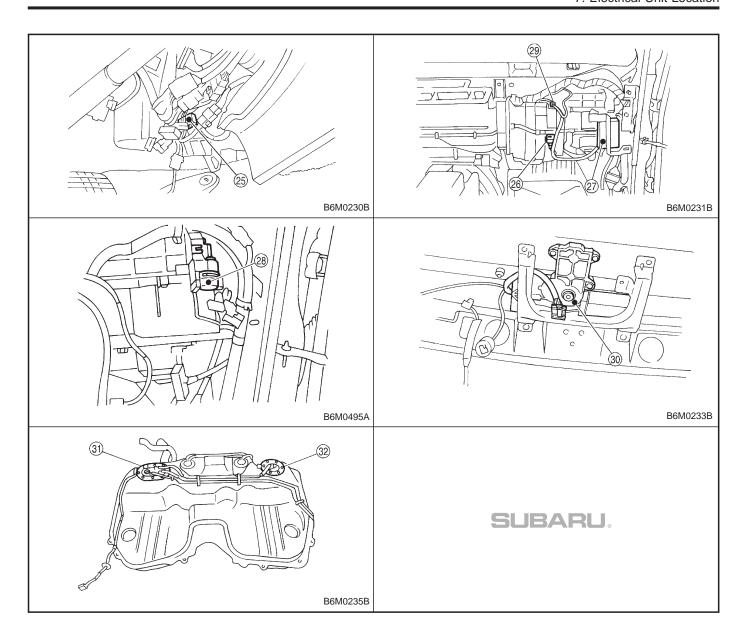

WIRING DIAGRAM

8. Electrical Wiring Harness and Ground Point

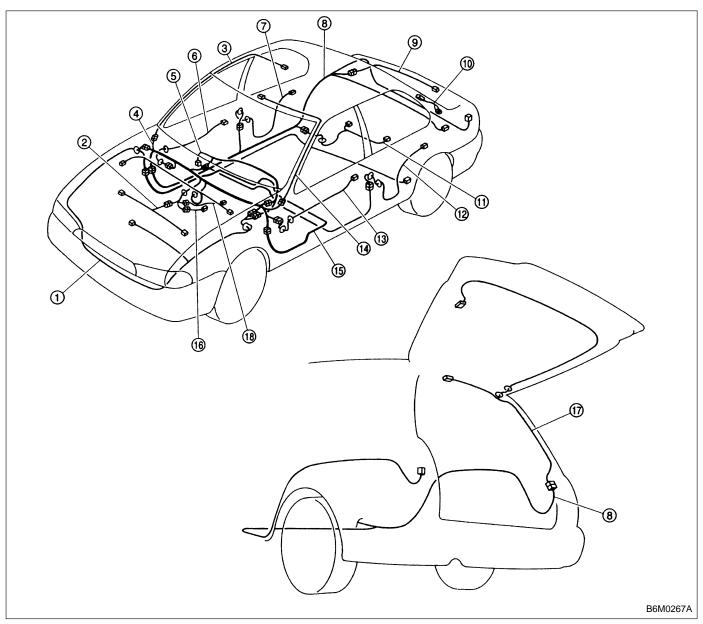

- Front wiring harness
- ② Engine wiring harness
- 3 Room light cord
- 4 Bulkhead wiring harness
- ⑤ Instrument panel wiring harness
- (f) Front door cord RH
- Rear door cord RH
- Rear wiring harness
- Trunk lid cord (Sedan)

- ® Rear defogger ground cord (Sedan)
- Fuel tank cord
- Rear door cord LH
- (3) Front door cord LH
- (4) Sunroof cord
- (5) Floor wiring harness
- (f) Transmission cord
- Rear gate cord (Wagon)
- [®] Rear oxygen sensor cord


1. FRONT WIRING HARNESS AND GROUND POINT

 LHD model 1 2 3 4 5 Α Α (F2) (F48) F45 F44 (F49) (F46) (F31) (F8) (F14) (F15) (F50) (F12) F42) (F30) F9 F27 F2 В В F13) F25 F1 F41) (F3) F28) F43 F40 (F32) F33 GB-1) (F10) (F26) (F18) ₹ (F16) TO F5 (F17) (F23) (GB-2)♥ C C (F47) (F21) (F21) D D 2 3 5

B6M0678

	Coni	nector			Connecting to
No.	Pole	Color	Area	No.	Name
	20	Blue	B-2	P1	Floor wiring harness (With TCS model)
F1	12	*	B-2	P1	Floor wiring harness (With ABS model)
F2	20	Blue	B-2	B100	Bulkhead wiring harness (With ABS model)
F3	3	Brown	B-1		Front turn signal and side marker light RH
F5	1	Black	B-1		Horn
	2	*	C-1		Front fog light RH
F6	2	Brown	C-1		Front fog light RH (Outback with step roof)
F7	3	Black	B-1		Headlight RH
F8	2	Gray	B-1		
F9	8	Gray	B-1		Hydraulic unit (ABS)
F10	4	*	B-2		TCS motor relay
F11	6	*	B-2		TCS valve relay
F12	2	Black	B-2		TCS pressure switch
F13	2	Black	B-2		TCS motor
F14	2	Gray	B-2		H. J. E. W. (TOO)
F15	12	Gray	B-2		Hydraulic unit (TCS)
F16	3	Black	C-1		Sub fan motor
F17	3	Black	C-2		Radiator main fan motor
F18	2	Gray	C-3		Front hood switch (Security)
F19	3	Brown	C-3		Front turn signal and side marker light LH
	2	*	C-2		Front fog light LH
F21	2	Brown	C-2		Front fog light LH (Outback with step roof)
F23	3	Black	C-2		Headlight LH
F24	3	Gray	B-2		A/C compressor
F25	1 x 2	*	B-2		
F26	2	Gray	B-2		Generator
F27	4	Black	B-3		A/C fuse (Relay holder)
F28	4	Black	B-3		A/C main fan relay-1 (Relay holder)
F29	4	Black	B-3		A/C sub fan relay-2 (Relay holder)
F30	4	Black	B-3		A/C main fan relay-2 (Relay holder)
F31	4	Black	B-3		A/C relay (Relay holder)
F32	2	Green	B-2		Front washer motor
F33	2	*	B-3		Rear washer motor
F34	4	Black	B-3		SBF holder
F35	8	Black	B-3		
F36	3	*	B-3		
F37	2	Black	B-3		M/B
F38	2	Black	B-3		
F39	1	Brown	B-3		7
F40	10	Gray	B-4		
F41	3	Gray	B-4		F/B
F42	5	Gray	B-4		1
F43	3	Orange	B-4		A/C diode
F44	8	*	B-3	B61	
F45	20	*	B-3	B62	Bulkhead wiring harness
F46	2	Black	B-4	B108	Bulkhead wiring harness (Outback)
F47	1	Black	C-3		Horn (TAIWAN model)
F48	6	*	B-3		Shield joint connector (ABS)
	83	Black	B-3		ABS control module
F49					


- 1. FRONT WIRING HARNESS AND GROUND POINT
- RHD model

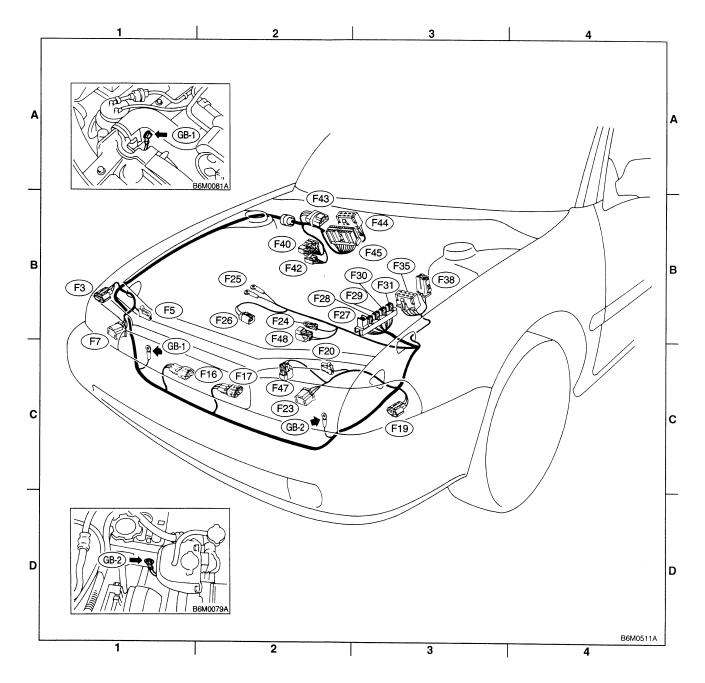

	Conr	nector			Connecting to
No.	Pole	Color	Area	No.	Name
F3	3	Brown	B-1		Front turn signal and side marker light RH
F5	1	Black	B-1		Horn
F7	3	Black	B-1		Headlight RH
F16	3	Black	C-1		Sub fan motor
F17	3	Black	C-2		Radiator main fan motor
F19	3	Brown	C-3		Front turn signal and side marker light LH
F20	1	Black	C-2		Horn
F23	3	Black	C-2		Headlight LH
F24	1	Black	B-2		A/C compressor
F25	1 x 2	*	B-2		- Generator
F26	2	Gray	B-2		Generator
F27	4	Black	B-3		A/C fuse (Relay holder)
F28	4	Black	B-3		A/C main fan relay-1 (Relay holder)
F29	4	Black	B-3		A/C sub fan relay-2 (Relay holder)
F30	4	Black	B-3		A/C main fan relay-2 (Relay holder)
F31	4	Black	B-3		A/C relay (Relay holder)
F35	8	Black	B-3		M/B
F38	2	Black	B-3		- IW/ D
F40	10	Gray	B-2		- F/B
F42	5	Gray	B-2		776
F43	3	Orange	B-2		A/C diode
F44	8	*	B-2	B61	Bulkhood wiring harnoss
F45	20	*	B-2	B62	Bulkhead wiring harness
F47	2	Gray	C-2		A/C pressure switch
F48	2	Blue	B-2		Thermal protector

^{*:} Non-colored

2. BULKHEAD WIRING HARNESS AND GROUND POINT (IN ENGINE ROOM)

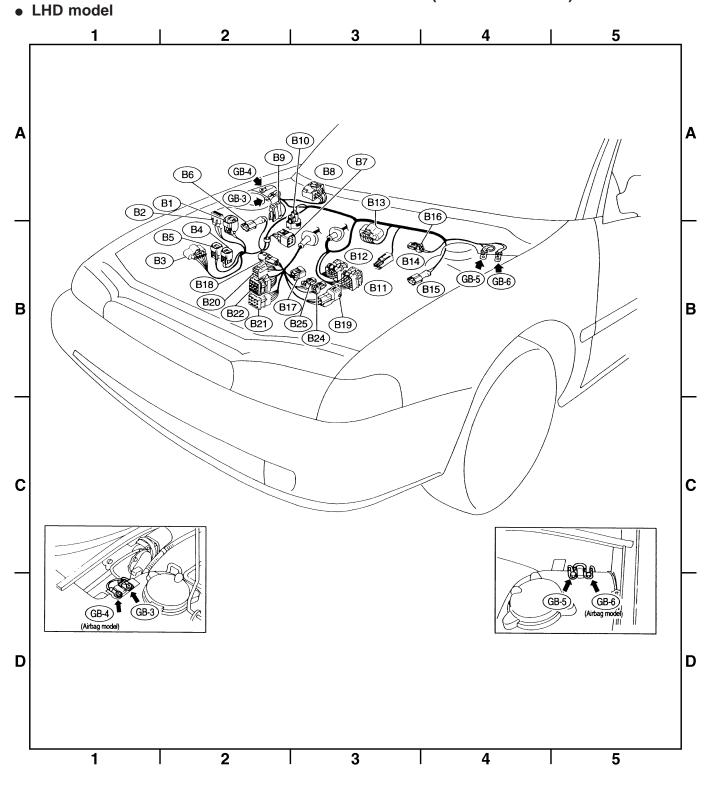


	Conr	nector			Connecting to
No.	Pole	Color	Area	No.	Name
B1	2	*	B-2		Pressure source switching solenoid
B2	3	Black	B-2		Pressure sensor
В3	5	Gray	B-2		Mass air flow sensor
B4	2	Gray	B-2		AT dropping resistor
B5	2	Gray	B-2		Resistor (Daytime running light)
B6	2	Gray	B-2		ABS front sensor RH
D0	2	Brown	B-2		ABS front sensor RH (Outback with step roof)
В7	4	*	B-2		Cruise control pump
В8	6	*	A-2		Front wiper motor
В9	2	Black	A-2		FWD switch (AT)
B10	2	Brown	B-2		A/C pressure switch
B11	16	Gray	B-3	T4	Transmission (AT)
B12	12	Gray	B-2	Т3	Halishiission (A1)
B13	6	Gray	B-3		Ignitor
B14	1	Black	B-3		Starter (Magnet)
B15	2	Gray	B-3		ABS front sensor LH
БІЗ	2	Brown	B-3		ABS front sensor LH (Outback with step roof)
B16	2	Gray	B-3		Brake fluid level switch
B17	2	Black	B-2		Vehicle speed sensor
B18	3	Dark gray	B-2		Front oxygen sensor
B19	4	*	B-2	T5	Rear oxygen sensor cord (Other models)
БІЯ	4	*	B-2		Rear oxygen sensor (California model)
B20	6	Light gray	B-2	E1	
B21	12	Light gray	B-2	E2	Engine wiring harness
B22	16	Light gray	B-2	E3	
B24	2	Gray	B-2	T1	Back-up light switch (MT)
B25	2	Brown	B-2	T2	Neutral position switch (MT)

^{*:} Non-colored

WIRING DIAGRAM

2. BULKHEAD WIRING HARNESS AND GROUND POINT (IN ENGINE ROOM)

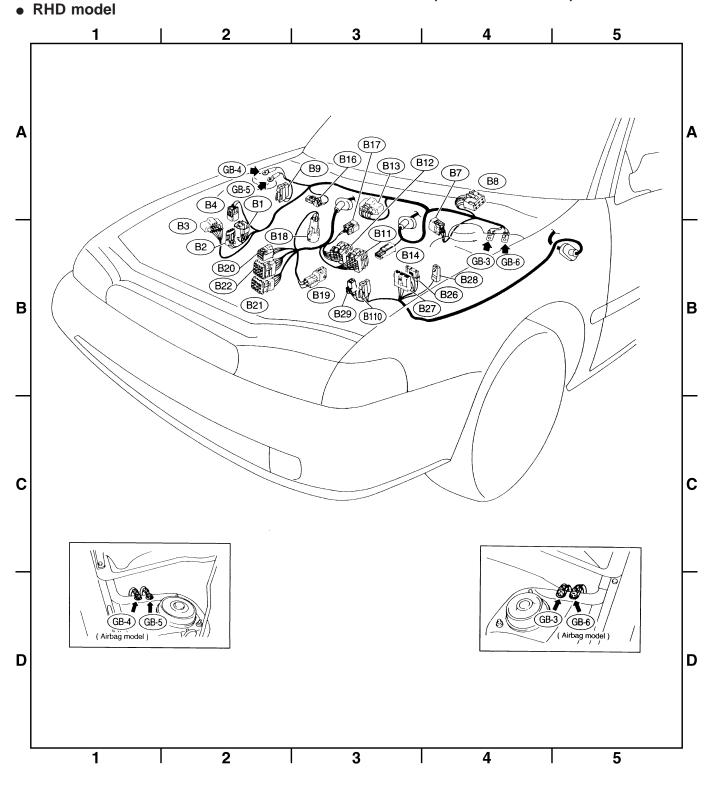

	Conr	nector			Connecting to
No.	Pole	Color	Area	No.	Name
B1	2	Brown	B-2		Pressure sources switching solenoid
B2	3	Black	B-2		Pressure sensor
В3	5	Gray	B-2		Mass air flow sensor
B4	2	Gray	B-2		AT dropping resistor
В7	4	Gray	B-3		Cruise control pump
B8	6	*	B-3		Front wiper motor
B9	2	Black	A-2		FWD switch
B11	16	Gray	B-3	T4	- Transmission
B12	12	Gray	B-2	Т3	- Hansmission
B13	6	Gray	B-3		Ignitor
B14	1	Black	B-3		Starter (Magnet)
B16	2	Gray	B-2		Brake fluid level switch
B17	2	Black	B-3		Vehicle speed sensor
B18	3	Dark gray	B-2		Front oxygen sensor
B19	4	*	B-2	T5	Rear oxygen sensor cord (Other models)
D19	4	*	B-2		Rear oxygen sensor (California model)
B20	6	Light gray	B-2	E1	
B21	12	Light gray	B-2	E2	Engine wiring harness
B22	16	Light gray	B-2	E3	
B26	2	Black	B-3		
B27	3	*	B-3		M/B
B28	1	Brown	B-3		
B29	2	*	B-2		Rear washer motor
B110	2	Green	B-3		Front washer motor

^{*:} Non-colored

3. ENGINE WIRING HARNESS, TRANSMISSION CORD AND GROUND POINT 3 5 Α Α (E5) (E14) E4 E9) **[** E11 **E18** (E12) (E10) (E8) В В (E15) C C (T2) (T5 D D 1 2 3 5

	Conn	ector			Connecting to
No.	Pole	Color	Area	No.	Name
E1	6	*	A-3	B20	
E2	12	Gray	A-3	B21	Bulkhead wiring harness
E3	16	Gray	A-3	B22	
E4	2	Blue	A-2		Purge control solenoid valve
E5	2	Light gray	A-2		Injector #1
E6	2	Dark gray	A-3		Injector #3
E7	3	Gray	A-3		Idle air control solenoid valve
E8	2	Brown	B-3		Engine coolant temperature sensor
E9	1	*	B-3		Thermometer
E10	2	Gray	B-3		Crankshaft position sensor
E11	1	*	B-3		Oil pressure switch
E12	3	Gray	A-3		Ignition coil
E13	3	Brown	A-3		Throttle position sensor
E14	2	Gray	B-3		Knock sensor
E15	2	Dark gray	B-4		Camshaft position sensor
E16	2	Light gray	B-4		Injector #2
E17	2	Dark gray	B-4		Injector #4
E18	2	Brown	B-3		EGR solenoid (AT)


^{*:} Non-colored

Connector				Connecting to			
No.	Pole	Color	Area	No.	Name		
T1	2	Gray	C-1	B24	Pull-hand wiring harrage (MT)		
T2	2	Brown	C-1	B25	Bulkhead wiring harness (MT)		
Т3	12	Gray	D-3	B12	Pull-hand wiring harrage (AT)		
T4	16	Gray	D-3	B11	Bulkhead wiring harness (AT)		
T5	4	Gray	C-1/C-3	B19	Bulkhead wiring harness		
T6	4	Gray	D-2/D-4		Rear oxygen sensor		
T7	12	*	C-4		Inhibitor switch (AT)		

^{*:} Non-colored

WIRING DIAGRAM

4. BULKHEAD WIRING HARNESS (IN COMPARTMENT)

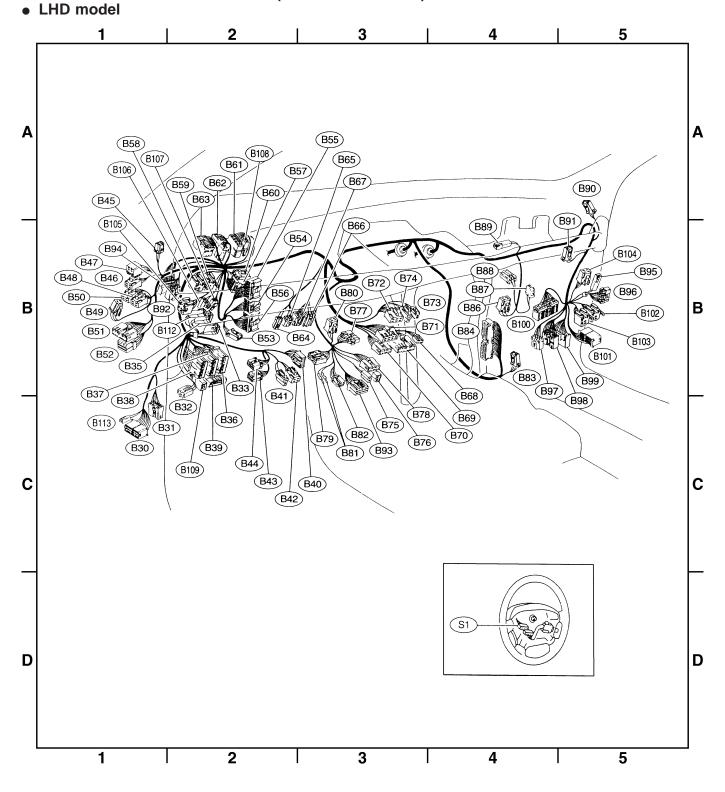

B6M0765

	Con	nector			Connecting to
No.	Pole	Color	Area	No.	Name
B30	24	*	C-1	D1	Front door cord LH
B31	7	Yellow	C-1	AB1	SRS (Airbag) harness
B32	3	Black	C-1	7.2.	Turn & hazard module
B33	4	Brown	B-1		Diode (Brake fluid level)
555	2	Black	B-1		Diode (Without step light)
B35	4	Brown	B-1		Diode (With step light)
B36	22	Black	C-1	i1	Diode (With Step light)
		*	_		
B37	22		C-1	i2	Instrument panel wiring harness
B38	22	Brown	C-1	i3	
B39	20	Blue	C-1	i4	000 !!
B40	16	Gray	C-2		OBD-II service connector
B41	2	*	C-2		Power window circuit breaker
B42	4	*	C-2		Power window and sunroof relay
B43	6	Black	C-2		Illumination control module
B44	8	*	C-2		Seat belt timer
B45	4	*	B-1	R53	Sunroof cord
B46	4	Green	B-1		Fuel pump relay
B47	6	Brown	B-1		Main relay
B48	4	Blue	B-1		Front fog light relay
B49	3	Black	B-1		Horn relay
B50	4	*	B-1		Blower relay
B51	11	Gray	B-1		E/D
B52	12	Gray	B-1		F/B
B53	4	*	B-2		Shield joint connector (AT)
B54	12	Black	B-2		
B55	16	Black	B-2		Transmission control module
B56	20	Black	B-2		
B57	12	Black	B-2		Shift-lock control module
B58	5	Black	B-1		Headlight alarm relay (Security)
B59	5	Black	B-1		Interrupt relay (Security)
B60	4	*	B-2		Shield joint connector
B61	8	*	B-2	F44	(With TCS model)
B62	20	*	B-1	F45	Front wiring harness
B63	40	Gray	B-1	P10	Floor harness (With TCS model)
B64	2	Black	B-2		Stop light switch
B65	4	Black	B-2		Stop & brake switch (With cruise control)
B66	3	Black	B-2		Pedal stroke sensor (TCS)
B67	4	Black	B-2		Pedal stroke switch (TCS)
B68	5	Black	B-3		Slip ring
B69	11	Black	B-3		. •
B70	9	*	B-3		Combination switch
B71	8	*	B-3		
B72	6	Black	B-3		Ignition switch
B73	2	Black	B-3		Key lock solenoid (AT)
B74	2	Black	B-3		Key warning switch
ــــــــــــــــــــــــــــــــــــــ		Didok			1.0, warming ownton


Connector Connecting to No. Pole Color Area No. Name B75 2 Green C-2 B76 B76 2 Green C-3 B75 B77 10 Brown B-2 Mode actuator B78 9 Yellow C-2 Data link connector B79 14 Gray C-2 Check connector B80 4 Blue B-2 i20 Instrument panel wiring harness B81 1 x 2 * C-2 Diagnosis terminal (Ground harness B81 1 x 2 * C-2 Diagnosis connector B82 6 Black C-2 Diagnosis connector B83 4 * C-3 Shield joint connector (E/G) B84 96 Light blue B-3 Engine control module B86 4 * B-3 Blower motor B87 2 * B-3 Blower motor	
B75 2 Green C-2 B76 B76 2 Green C-3 B75 B77 10 Brown B-2 Mode actuator B78 9 Yellow C-2 Data link connector B79 14 Gray C-2 Check connector B80 4 Blue B-2 i20 Instrument panel wiring harness B81 1 x 2 * C-2 Diagnosis terminal (Ground harness B82 6 Black C-2 Diagnosis connector B83 4 * C-3 Shield joint connector (E/G) B84 96 Light blue B-3 Engine control module B86 4 * B-3 Blower motor resistor B87 2 * B-3 Blower motor B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 *	
B76 2 Green C-3 B75 B77 10 Brown B-2 Mode actuator B78 9 Yellow C-2 Data link connector B79 14 Gray C-2 Check connector B80 4 Blue B-2 i20 Instrument panel wiring harness B81 1 x 2 * C-2 Diagnosis terminal (Ground harness B82 6 Black C-2 Diagnosis connector B83 4 * C-3 Shield joint connector (E/G) B84 96 Light blue B-3 Engine control module B86 4 * B-3 Blower motor resistor B87 2 * B-3 Blower motor B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 * B-4 RESH/RECIRC actuator B91 4 *<	
B78 9 Yellow C-2 Data link connector B79 14 Gray C-2 Check connector B80 4 Blue B-2 i20 Instrument panel wiring harness B81 1 x 2 * C-2 Diagnosis terminal (Ground harness B82 6 Black C-2 Diagnosis connector B83 4 * C-3 Shield joint connector (E/G) B84 96 Light blue B-3 Engine control module B86 4 * B-3 Blower motor resistor B87 2 * B-3 Blower motor B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 * B-4 RSOR Room light cord B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16	
B79 14 Gray C-2 Check connector B80 4 Blue B-2 i20 Instrument panel wiring harness B81 1 x 2 * C-2 Diagnosis terminal (Ground harness B82 6 Black C-2 Diagnosis connector B83 4 * C-3 Shield joint connector (E/G) B84 96 Light blue B-3 Engine control module B86 4 * B-3 Blower motor resistor B87 2 * B-3 Blower motor B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 * B-4 RSO Room light cord B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94	
B80 4 Blue B-2 i20 Instrument panel wiring harness B81 1 x 2 * C-2 Diagnosis terminal (Ground B82 6 Black C-2 Diagnosis connector B83 4 * C-3 Shield joint connector (E/G) B84 96 Light blue B-3 Engine control module B86 4 * B-3 Blower motor resistor B87 2 * B-3 Blower motor B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 * B-4 R50 Room light cord B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light control	
B80	
B82 6 Black C-2 Diagnosis connector B83 4 * C-3 Shield joint connector (E/G) B84 96 Light blue B-3 Engine control module B86 4 * B-3 Blower motor resistor B87 2 * B-3 Blower motor B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 * B-4 R50 Room light cord B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light control module B96 10 * B-4 Daytime running light control module	
B83 4 * C-3 Shield joint connector (E/G) B84 96 Light blue B-3 Engine control module B86 4 * B-3 Blower motor resistor B87 2 * B-3 Blower motor B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 * B-4 R50 Room light cord B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light control module) B96 10 * B-4 Daytime running light control module	1)
B84 96	
B86)
B86 4 * B-3 Blower motor B87 2 * B-3 Blower motor B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 * B-4 R50 Room light cord B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light control module) B96 10 * B-4 Daytime running light control module	
B88 3 Black B-3 Evaporator thermoswitch B89 2 Black B-3 Diode (Security) B90 4 * B-4 R50 Room light cord B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light control module) B96 10 * B-4 Daytime running light control module	
B89 2 Black B-3 Diode (Security) B90 4 * B-4 R50 Room light cord B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light control module) B96 10 * B-4 Daytime running light control module	
B90 4	
B91 4 * B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light B96 10 * B-4 Daytime running light control	
B91 4 B-4 FRESH/RECIRC actuator B92 8 * B-4 Door lock timer B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light control module) B96 10 * B-4 Daytime running light control	
B93 16 Black B-4 Security control module B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light	
B94 20 Black B-4 Cruise control module B95 2 Black B-4 Diode (Daytime running light	
B95 2 Black B-4 Diode (Daytime running light	
Ros 10 * R-4 Daytime running light control	
	nt)
I	ol
B97 8 * B-4 R1 Rear wiring harness	
20 * B-4 R2 Rear wiring harness (Other models)	
B98 24 Black B-4 R2 Rear wiring harness (2200 cc engine AWD exce Taiwan model)	pt
B99 24 * B-4 R3 Rear wiring harness	
B100 20 Blue B-4 F2 Front wiring harness (With ABS model)	
B101 24 * B-4 D11 Front door cord RH	
B102 5 Black B-4 Daytime running light relay	
B103 4 Blue B-4 High-beam relay (Daytime running light)	
B104 4 Pink B-4 Rear power supply relay	
B105 4 Blue B-1 Starter interlock relay (MT)	
B106 2 * B-1 Clutch switch (MT)	
B107 2 Blue B-1 Clutch switch (Cruise control	ol)
B108 2 Black B-2 F46 Front wiring harness (Outback)	
B109 4 Black C-1 Fuse holder (Outback)	
B112 2 Black B-1 Diode (Front fog light)	
B113 2 * C-1 D50 Front door cord LH	

*: Non-colored

	Con	nector			Connecting to
No.	Pole	Color	Area	No.	Name
S1	3	White	D-3		Cruise control sub switch

B6M0782

4. BULKHEAD WIRING HARNESS (IN COMPARTMENT)

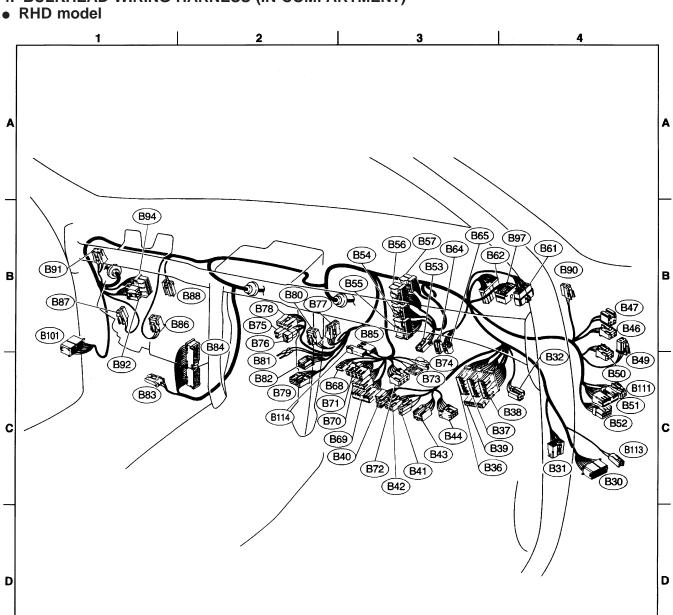


3

2

	Con	nector			Connecting to
No.	Pole	Color	Area	No.	Name
B30	24	*	C-4	D1	Front door cord RH
B31	7	Yellow	C-4	AB1	SRS (Airbag) harness
B32	3	Black	C-4		Turn & hazard module
B36	22	Black	C-3	i1	
B37	22	*	C-3	i2	Instrument panel wiring
B38	22	Brown	C-3	i3	harness
B39	20	Blue	C-3	i4	
B40	16	Gray	C-3		OBD-II service connector
B41	2	*	C-3		Power window circuit breaker
B42	4	*	C-3		Power window relay
B43	6	Black	C-3		Illumination control module
B44	8	*	C-3		Seat belt timer
B46	4	Green	B-4		Fuel pump relay
B47	6	Brown	B-4		Main relay
B49	3	Black	B-4		Horn relay
B50	4	*	B-4		Blower relay
B51	11	Gray	C-4		F/B
B52	12	Gray	C-4		176
B53	4	*	B-3		Shield joint connector (AT)
B54	12	Black	B-3		
B55	16	Black	B-3		Transmission control module
B56	20	Black	B-3		
B57	12	Black	B-3		Shift-lock control module
B61	8	*	B-4	F44	Front wiring harness
B62	20	*	B-4	F45	Tront willing hattless
B64	2	Black	B-3		Stop light switch
B65	4	Black	B-3		Stop & brake switch (With cruise control)
B68	5	Black	B-3		Cruise control sub switch


Connector					Connecting to		
No.	Pole	Color	Area	No.	Name		
B69	11	Black	C-3				
B70	9	*	C-3		Combination switch		
B71	8	*	B-3				
B72	6	Black	C-3		Ignition switch		
B73	2	Black	B-3		Key lock solenoid		
B74	2	Black	B-3		Key warning switch		
B75	2	Green	B-2	B76	Test mode connector		
B76	2	Green	B-2	B75	Test mode connector		
B77	7	*	B-2		Mode actuator		
B78	9	Yellow	B-2		Data link connector		
B79	14	Gray	C-2		Check connector		
B80	4	Blue	B-2	i20	Instrument panel wiring harness		
B81	1 x 2	*	B-2		Diagnosis terminal (Ground)		
B82	6	Black	B-2		Diagnosis connector		
B83	4	*	C-1		Shield joint connector (E/G)		
B84	96	Light blue	C-2		Engine control module		
B85	4	Brown	B-3		Diode (Lighting)		
B86	4	Black	B-1		Blower motor resistor		
B87	2	Black	B-1		Blower motor		
B88	3	Black	B-1		Evaporator thermoswitch		
B90	2	Green	B-4	R50	Room light cord		
B91	5	*	B-1		FRESH/RECIRC actuator		
B92	8	*	B-1		Door lock timer		
B94	20	Black	B-1		Cruise control module		
B97	56	*	B-4	R1	Rear wiring harness (S.M.J.)		
B101	24	*	B-1	D11	Front door cord LH		
B111	3	Gray	C-4		F/B		
B113	2	*	C-4	D50	Front door cord RH		
B114	2	Black	C-3		Diode (Door warning)		

^{*:} Non-colored

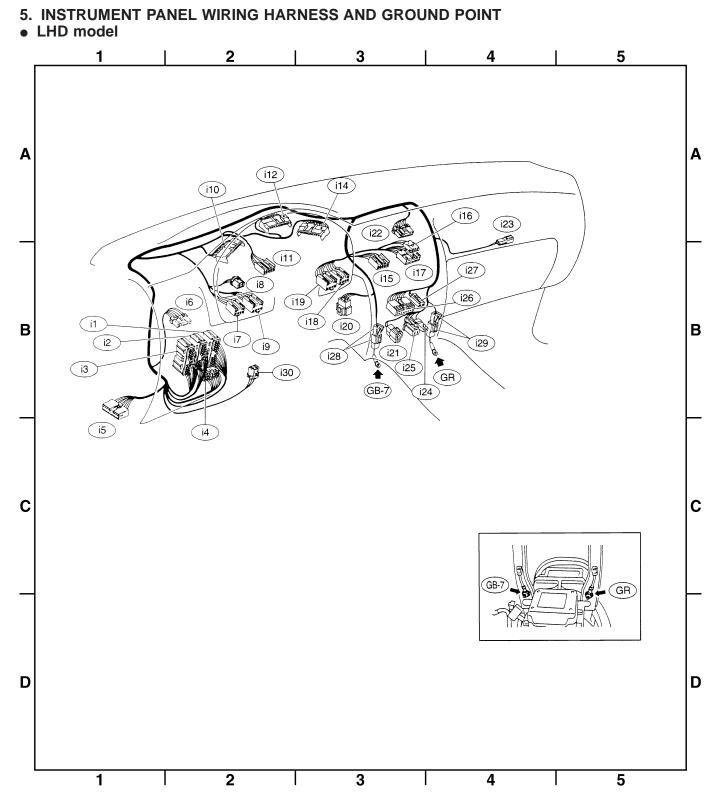

	Connector			Connecting to		
No.	Pole	Color	Area	No.	Name	
i1	22	Black	C-2	B36		
i2	22	*	C-1	B37	Pullshared within the server	
іЗ	22	Brown	C-1	B38	Bulkhead wiring harness	
i4	20	Blue	C-2	B39		
i5	15	Gray	C-1		F/B	
i6	10	*	C-1		Remote control rearview mirror switch	
i7	6	Yellow	B-2		Front fog light switch	
i8	4	Brown	B-2		Security indicator light	
i9	6	*	B-2		TCS off switch	
i10	16	Light gray	B-2		Combination mater	
i11	5	Light blue	B-2		Combination meter	
i12	16	Light gray	B-2		Combination meter	
i14	13	*	B-2		Combination meter	
i15	6	*	B-3		Fan switch	
i16	3	*	B-3		A/C switch	
i17	16	*	B-3		Mode control panel	
i18	6	*	B-3		Rear defogger switch	
i19	6	Brown	B-2		Cruise control main switch	
i20	4	Blue	B-3	B80	Bulkhead wiring harness	
i21	2	Black	C-3		Ash tray illumination light	
i22	10	*	B-3		Hazard switch	
i23	2	Brown	B-4		Glove box illumination light	
i24	1	*	C-3		Front accessory power supply	
i25	3	*	C-3		Tront accessory power suppry	
i26	14	*	B-3		Radio	
i27	2	*	B-3		CD player illumination light	
i28	1	Black	C-3		Ground	
i29	1	Black	C-3		Ground (Radio)	
i30	4	*	B-2		Rear window defogger timer	

^{*:} Non-colored

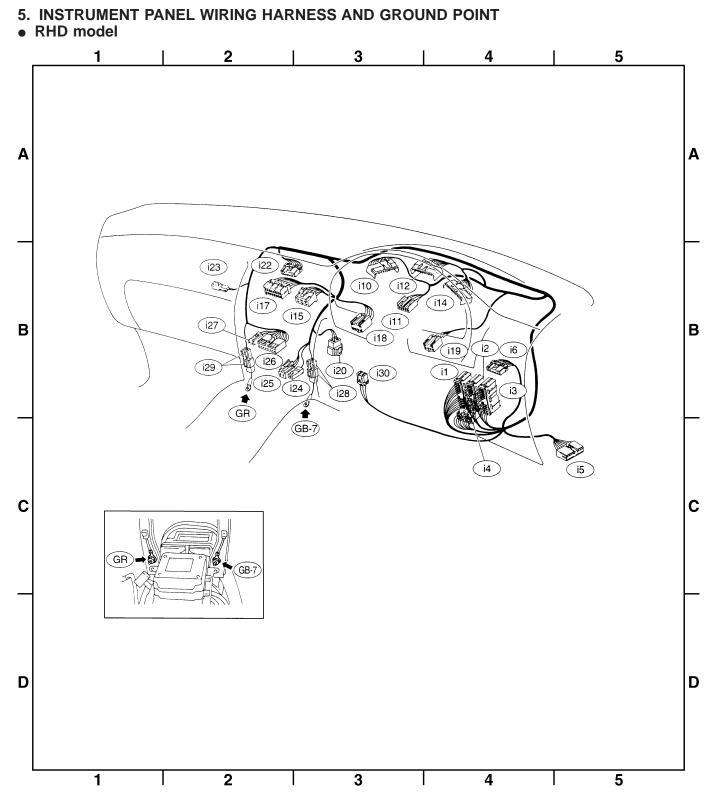

	Connector				Connecting to		
No.	Pole	Color	Area	No.	Name		
i1	22	Black	C-4	B36			
i2	22	*	C-4	B37	Dullshand withing harmon		
i3	22	Brown	C-4	B38	Bulkhead wiring harness		
i4	20	Blue	C-4	B39			
i5	15	Gray	C-4		F/B		
i6	10	*	C-4		Remote control rearview mirror switch		
i10	16	Light gray	B-3		Combination meter		
i11	5	Light blue	B-3		- Combination meter		
i12	16	Light gray	B-3		Combination meter		
i14	13	*	B-3		Combination meter		
i15	6	*	B-2		Fan switch		
i17	16	Black	B-2		Mode control panel		
i18	6	*	B-3		Rear defogger switch		
i19	6	Brown	B-3		Cruise control main switch		
i20	4	Blue	B-2	B80	Bulkhead wiring harness		
i22	10	*	B-2		Hazard switch		
i23	2	Brown	B-2		Glove box illumination light		
i24	1	*	C-2		Front googgery power gupply		
i25	3	*	C-2		Front accessory power supply		
i26	14	*	B-2		Radio		
i27	2	*	B-2		CD player illumination light		
i28	1	Black	C-2		Ground		
i29	1	Black	C-2		Ground (Radio)		
i30	4	*	B-2		Rear window defogger timer		

^{*:} Non-colored


6. REAR WIRING HARNESS AND GROUND POINT

 LHD model 1 2 3 4 5 Α Α R52 (R69) (R16) (R56) (R51) **R55** (R14) R54 R13 (R58) (R12) (R15) (R59) R68 (R50) (GB-8) (R41) R3 (R57) В В R53 R8 (R11) (R6) R4 R5 R9 (R42) (R43) C C D D 2 3 5

	Conr	nector			Connecting to			
No.	Pole	Color	Area	No.	Name			
R1	8	*	B-2	B97	Bulkhead wiring harness			
R2	24	Black	B-2	B98	Bulkhead wiring harness (2200 cc engine AWD except Taiwan model)			
	20	*	B-2	B98	Bulkhead wiring harness (Other models)			
R3	24	*	B-2	B99	Bulkhead wiring harness			
R4	1	Black	B-2		Parking brake switch			
R5	2	*	C-2		Select lever illumination light (AT)			
R6	2	Black	C-2		Shift lock solenoid (AT)			
R7	2	*	C-2		P position switch (AT)			
R8	2	*	C-3		Seat belt switch			
R9	1	Brown	C-4		Front door switch LH			
R10	2	*	C-4	D22	Rear door cord LH (Security)			
R11	8	*	C-4	D21	Rear door cord LH			
R12	1	Brown	B-2		Front door switch RH			
R13	2	*	B-2	D28	Rear door cord RH (Security)			
R14	8	*	B-2	D27	Rear door cord RH			
DAE	8	*	B-3	R57	Fuel tank cord (2200 cc engine AWD except Taiwan model)			
R15	6	Black	B-3	R57	Fuel tank cord (Other models)			
R16	1	Brown	B-3		Rear door switch RH			
R29	3	*	C-2		Diode (Security)			
R30	2	Black	C-2		Diode (Rear gate latch switch) (Wagon)			
R31	3	*	C-2		Diode (Security)			
R41	4	Blue	B-2		Seat heater (Passenger)			
R42	6	*	B-3		Seat heater switch (Passenger)			
R43	6	Blue	B-3		Seat heater switch (Driver)			
R44	4	Blue	C-3		Seat heater (Driver)			
R46	2	*	B-3	R67	Fuel tank cord (2200 cc engine AWD except Taiwan model)			
R50	4	*	B-2	B90	Bulkhead wiring harness			
R51	2	*	B-2		Vanity mirror illumination light RH			
R52	2	*	A-3		Room light			
R53	4	*	C-3	B45	Bulkhead wiring harness			
R54	2	*	B-3		Vanity mirror illumination light LH			
R55	1	*	B-3		Sunroof control module			
R56	2	*	B-3		Spot light			
R57	8	*	B-3	R15	Rear wiring harness			
R58	6	*	B-3		Fuel gauge module & fuel pump			
R59	2	*	B-4		Fuel gauge sub module (AWD)			
R67	2	*	B-3	R46	Rear wiring harness			
R68	2	*	B-3		Pressure control solenoid valve			
R69	2	*	B-3		Vent control solenoid valve			


^{*:} Non-colored

6. REAR WIRING HARNESS AND GROUND POINT

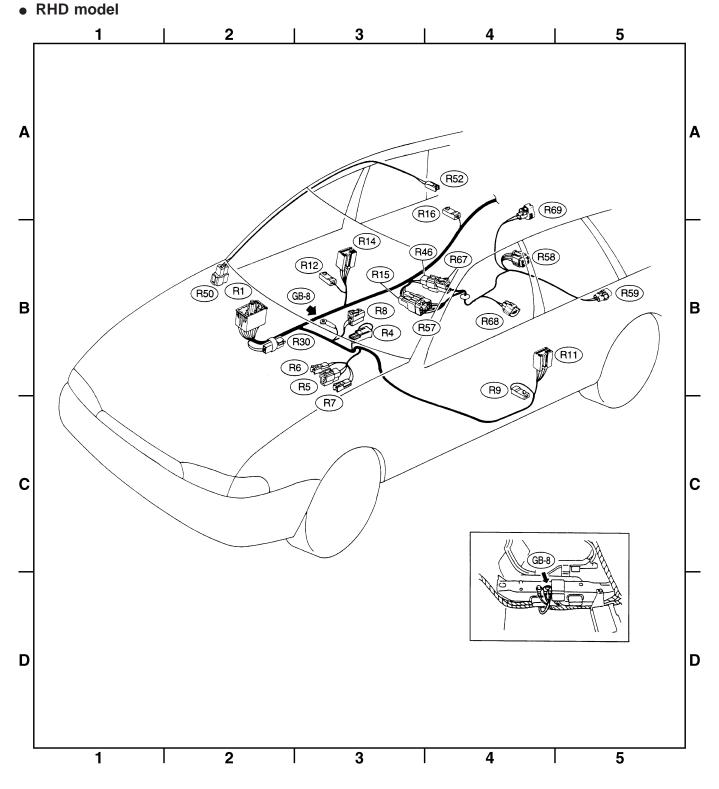

Connector					Connecting to		
No.	Pole	Color	Area	No.	Name		
R1	56	*	B-2	B97	Bulkhead wiring harness (S.M.J.)		
R4	1	Black	B-2		Parking brake switch		
R5	2	*	B-2		Select lever illumination light		
R6	2	Black	B-2		Shift lock solenoid		
R7	2	*	B-2		P position switch		
R8	2	*	B-2		Seat belt switch		
R9	1	Brown	B-3		Front door switch LH		
R11	8	*	B-4	D21	Rear door cord LH		
R12	1	Brown	B-2		Front door switch RH		
R14	8	*	B-2	D27	Rear door cord RH		
R15	8	*	B-3	R57	Fuel tank cord		
R16	1	Brown	A-3		Rear door switch RH		
R30	2	Black	B-2		Diode (Rear gate latch switch)		
R46	2	*	B-3	R67	Fuel tank cord		
R50	2	Green	B-2	B90	Bulkhead wiring harness		
R52	2	*	A-3		Room light		
R57	8	*	B-3	R15	Rear wiring harness		
R58	6	*	A-3		Fuel gauge module & fuel pump		
R59	2	*	B-4		Fuel gauge sub module		
R67	2	*	B-3	R46	Rear wiring harness		
R68	2	*	B-3		Pressure control solenoid valve		
R69	2	*	A-3		Vent control solenoid valve		

^{*:} Non-colored

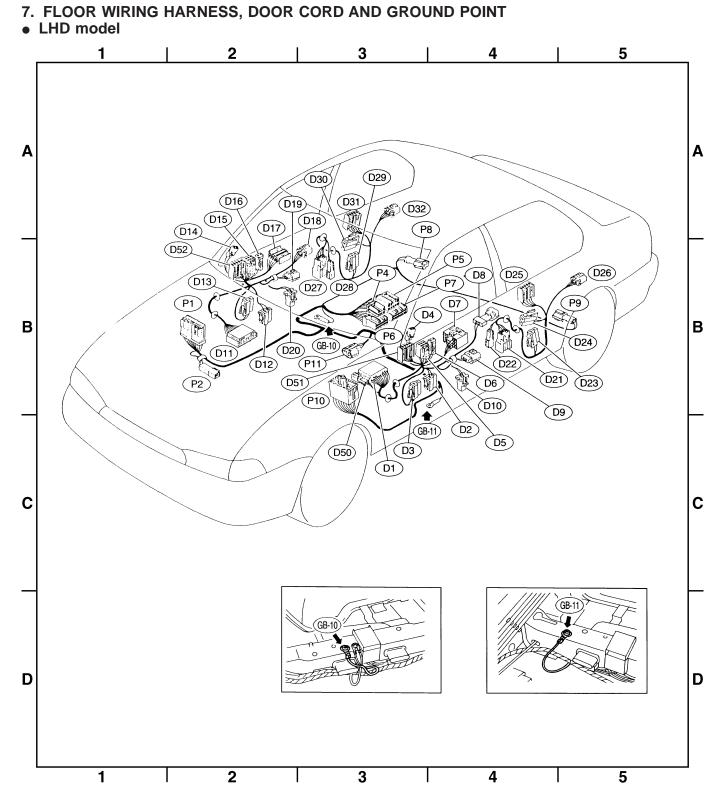


				Q			
	Connector				Connecting to		
No.	Pole	Color	Area	No.	Name		
P1	20	Blue	B-1	F1	Front wiring harness (With TCS model)		
	12	*	B-1	F1	Front wiring harness (With ABS model)		
P2	2	Black	C-2		Diode (TCS)		
P4	6	*	B-3				
P5	8	*	B-3		ABS/TCS control module		
P6	16	*	B-3		ABS/TCS control module		
P7	20	*	B-3				
	2	Gray	B-3		Rear ABS sensor RH		
P8	2	*	B-3		Rear ABS sensor RH (Outback with step roof)		
	2	Gray	B-4		Rear ABS sensor LH		
P9	2	*	B-4		Rear ABS sensor LH (Outback with step roof)		
P10	40	Gray	B-2	B63	Bulkhead wiring harness (With TCS model)		
P11	3	*	B-2		ABS G sensor		

Connector					Connecting to		
No.	Pole	Color	Area	No.	Name		
D1	24	*	C-3	B30	Bulkhead wiring harness		
D2	2	*	C-3		Front door speaker LH		
D3	2	Green	C-3		Front power window motor LH		
D4	2	Black	B-3		Front tweeter LH		
D5	6	*	B-3		Remote control rearview mirror LH		
D6	2	*	B-3		Mirror heater LH		
D7	14	*	B-3		Power window main switch		
	4	*	B-3		Front door lock actuator LH		
D8	4	Gray	B-3		Front door lock actuator LH (With security system)		
D9	4	Gray	B-3		Front door key switch LH (Security)		
D10	2	Black	C-3		Step light LH		
D11	24	*	B-2	B101	Bulkhead wiring harness		

	Con	nector			Connecting to		
No.	Pole	Color	Area	No.	Name		
D12	2	*	B-2		Front door speaker RH		
D13	2	Green	B-2		Front power window motor RH		
D14	2	Black	B-2		Front tweeter RH		
D15	6	*	B-2		Remote control rearview mirror RH		
D16	2	*	B-2		Mirror heater RH		
D17	5	*	B-2		Front power window sub switch RH		
	4	*	B-2		Front door lock actuator RH		
D18	4	Gray	B-2		Front door lock actuator RH (With security system)		
D19	4	Gray	B-2		Front door key switch RH (Security)		
D20	2	Black	B-2		Step light RH		
D21	8	*	B-3	R11	Rear wiring harness		
D22	2	*	B-3	R10	Rear wiring harness (Security)		
D23	2	Black	B-4		Rear door speaker LH		
D24	2	Green	B-4		Rear power window motor LH		
D25	5	*	B-4		Rear power window sub switch LH		
	4	*	B-4		Rear door lock actuator LH		
D26	4	Gray	B-4		Rear door lock actuator LH (With security system)		
D27	8	*	B-2	R14	Rear wiring harness		
D28	2	*	B-2	R13	Rear wiring harness (Security)		
D29	2	Black	B-2		Rear door speaker RH		
D30	2	Green	B-3		Rear power window motor RH		
D31	5	*	A-2		Rear power window sub switch RH		
	4	*	A-3		Rear door lock actuator RH		
D32	4	Gray	A-3		Rear door lock actuator RH (With security system)		
D50	2	*	C-2	B113	Bulkhead wiring harness		
D51	5	*	B-3		Front door lock switch LH		
D52	5	*	B-2		Front door lock switch RH		

^{*:} Non-colored

7. FLOOR WIRING HARNESS, DOOR CORD AND GROUND POINTRHD model

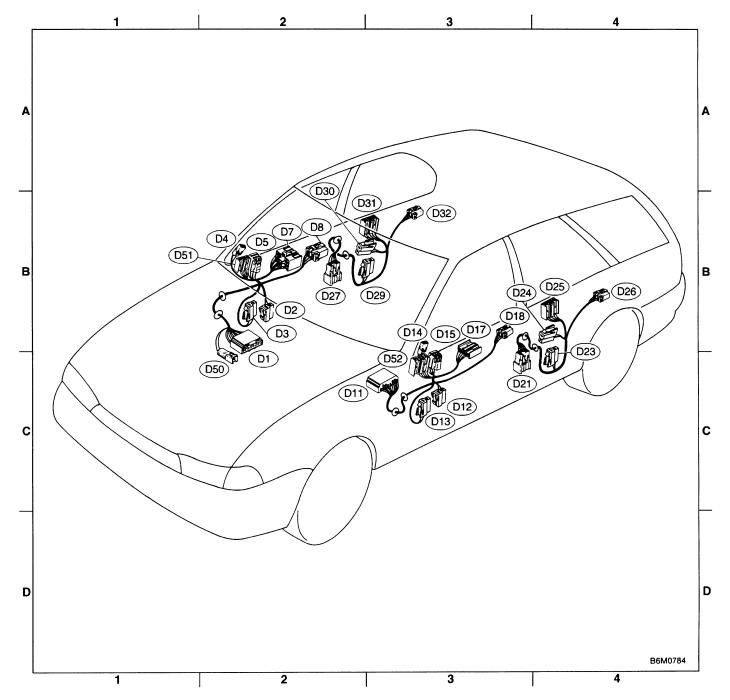

Connector					Connecting to		
No.	Pole	Color	Area	No.	Name		
D1	24	*	B-2	B30	Bulkhead wiring harness		
D2	2	*	B-2		Front door speaker RH		
D3	2	Green	B-2		Front power window motor RH		
D4	2	Black	A-2		Front tweeter RH		
D5	6	*	B-2		Remote control rearview mirror RH		
D7	14	*	B-2		Power window main switch		
D8	4	*	A-2		Front door lock actuator RH		
D11	24	*	B-3	B101	Bulkhead wiring harness		
D12	2	*	B-3		Front door speaker LH		
D13	2	Green	B-3		Front power window motor LH		
D14	2	Black	B-3		Front tweeter LH		
D15	6	*	B-3		Remote control rearview mirror LH		
D17	5	*	B-3		Front power window sub switch LH		
D18	4	*	B-3		Front door lock actuator LH		
D21	8	*	B-3	R11	Rear wiring harness		
D23	2	Black	B-4		Rear door speaker LH		
D24	2	Green	B-4		Rear power window motor LH		
D25	5	*	B-4		Rear power window sub switch LH		
D26	4	*	B-4		Rear door lock actuator LH		
D27	8	*	B-2	R14	Rear wiring harness		
D29	2	Black	B-3		Rear door speaker RH		
D30	2	Green	A-3		Rear power window motor RH		
D31	5	*	A-3		Rear power window sub switch RH		
D32	4	*	A-3		Rear door lock actuator RH		
D50	2	*	B-2	B113	Bulkhead wiring harness		
D51	5	Green	B-2		Front door lock switch RH		
D52	5	Green	C-3		Front door lock switch LH		

^{*:} Non-colored

8. REAR END WIRING HARNESS AND GROUND POINT OF SEDAN 3 5 Α Α (R65) (R19) GD ⇒ er (R18) **R66** R24 R60 (R22) (R26) В В (R28) (R63) (R64) (R27) C C D D

EPA0108

5

3

1


2

Connector					Connecting to		
No.	Pole	Color	Area	No.	Name		
R17	1	Black	A-3		Rear defogger (Power)		
R18	2	Black	B-3		Rear speaker RH		
R19	2	*	B-3		High-mounted stop light		
R20	2	Blue	B-2		Trunk room light		
R21	2	Black	B-2		Rear speaker LH		
R22	1	Brown	B-1		Rear door switch LH		
R23	3	*	B-2		Power antenna		
R24	6	*	B-3	R60	Trunk lid cord (Without security system)		
K24	8	*	B-3	R60	Trunk lid cord (With security system)		
R25	2	Black	B-4		Rear defogger condenser		
R26	4	*	B-4		Rear combination light RH		
R27	2	*	B-4		Trunk room light switch		
R28	4	*	B-3		Rear combination light LH		
R47	3	*	B-3		Fuel tank pressure sensor		
R60	6	*	B-4	R24	Rear wiring harness (Without security system)		
Kou	8	*	B-4	R24	Rear wiring harness (With security system)		
R61	3	*	B-4		Key switch (Security)		
R62	4	*	B-4		Rear finisher light RH		
R63	2	*	B-3		License plate light		
R64	4	*	B-3		Rear finisher light LH		
R65	1	Black	A-2		Rear defogger (Ground)		
R66	2	Black	B-4		High-mounted stop light (Rear spoiler)		

^{*:} Non-colored

9. REAR END WIRING HARNESS AND GROUND POINT OF WAGON

• LHD model

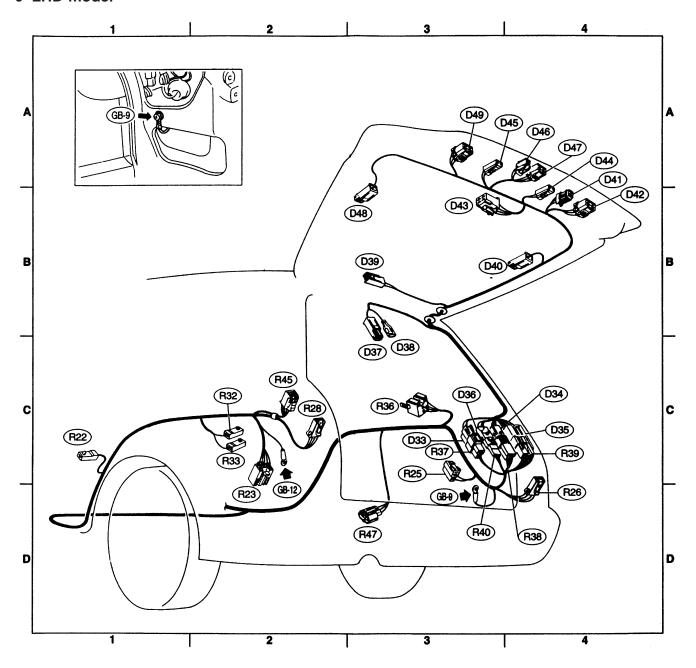


B6M0694A

	Connector			Connecting to		
No.	Pole	Color	Area	No.	Name	
R22	1	Brown	C-1		Rear door switch LH	
R23	6	*	C-2		Power antenna	
R25	2	Black	C-3		Rear defogger condenser	
R26	4	Black	D-4		Rear combination light RH	
R28	4	Black	C-2		Rear combination light LH	
R32	1	*	C-2		Rear accessory power supply (Power)	
R33	1	Black	C-2		Rear accessory power supply (Ground)	
R36	5	Black	C-3		Rear wiper relay	
R37	2	*	C-3	D33		
R38	4	*	C-3	D34	Rear gate cord	
R39	8	*	C-4	D35		
R40	4	Black	C-3	D36	Rear gate cord (With security)	
R45	6	*	C-2		Trailer connector (Outback with step roof)	
R47	3	*	D-3		Fuel tank pressure sensor	

	Connector				Connecting to		
No.	Pole	Color	Area	No.	Name		
D33	2	*	C-3	R37			
D34	4	*	C-3	R38	Rear wiring harness		
D35	8	*	C-4	R39			
D36	4	Black	C-3	R40	Rear wiring harness (With security)		
D37	1	Black	B-3		Luggaga room light		
D38	1	*	B-3		Luggage room light		
D39	2	*	B-3		High-mounted stop light		
D40	1	Black	B-4		Rear defogger (Power)		
D41	4	Gray	B-4		Key switch (Security)		
D42	4	*	B-4		Rear finisher light RH		
D43	4	*	B-3		Rear wiper motor		
D44	2	*	B-4		License plate light RH		
D45	2	*	A-3		License plate light LH		
D46	2	Black	A-4		Rear gate latch switch		
D47	4	*	A-4		Rear gate lock actuator (Without security system)		
D47	4	Gray	A-4		Rear gate lock actuator (With security system)		
D48	1	Black	B-3		Rear defogger (Ground)		
D49	4	*	A-3		Rear finisher light LH		

^{*:} Non-colored

9. REAR END WIRING HARNESS AND GROUND POINT OF WAGON

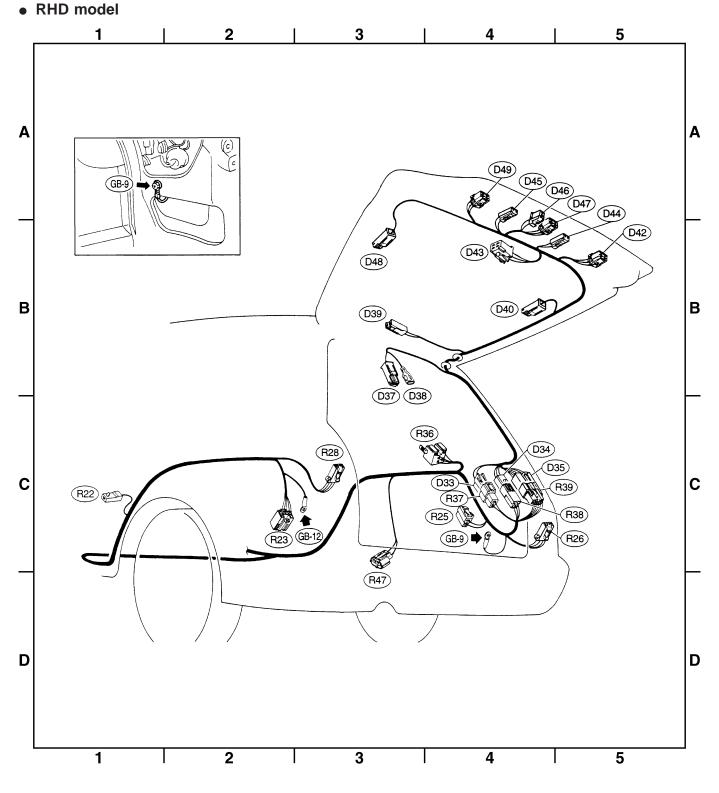

Connector				Connecting to	
No.	Pole	Color	Area	No.	Name
R22	1	Brown	C-1		Rear door switch LH
R23	6	*	C-2		Power antenna
R25	2	Black	C-3		Rear defogger condenser
R26	4	Black	D-4		Rear combination light RH
R28	4	Black	C-2		Rear combination light LH
R36	5	Black	C-3		Rear wiper relay
R37	2	*	C-3	D33	
R38	4	*	C-3	D34	Rear gate cord
R39	8	*	C-4	D35	
R47	3	*	D-3		Fuel tank pressure sensor

Connector				Connecting to		
No.	Pole	Color	Area	No.	Name	
D33	2	*	C-3	R37	Rear wiring harness	
D34	4	*	C-3	R38		
D35	8	*	C-4	R39		
D37	1	Black	B-3		Luggage room light	
D38	1	*	B-3			
D39	2	*	B-3		High-mounted stop light	
D40	1	Black	B-4		Rear defogger (Power)	
D42	4	*	B-4		Rear finisher light RH	
D43	4	*	B-3		Rear wiper motor	
D44	2	*	B-4		License plate light RH	
D45	2	*	A-3		License plate light LH	
D46	2	Black	A-4		Rear gate latch switch	
D47	4	*	A-4		Rear gate lock actuator	
D48	1	Black	B-3		Rear defogger (Ground)	
D49	4	*	A-3		Rear finisher light LH	

^{*:} Non-colored