
### **COMPONENT PARTS**

# 1. Exhaust System

## A: 2200 cc MODEL

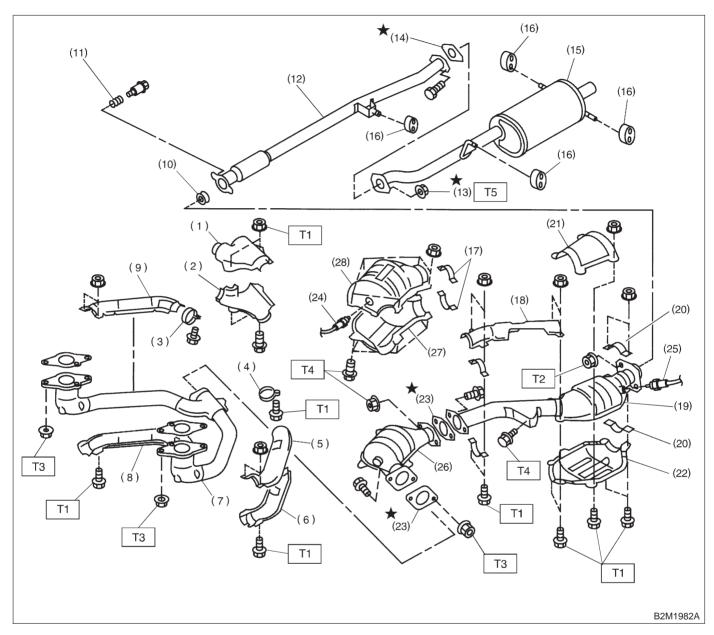

1. Exhaust System

- (1) Upper front exhaust pipe cover CTR
- (2) Lower front exhaust pipe cover CTR
- (3) Band RH
- (4) Band LH
- (5) Upper front exhaust pipe cover I H
- (6) Lower front exhaust pipe cover LH
- (7) Front exhaust pipe
- (8) Lower front exhaust pipe cover RHUpper front exhaust pipe cover RH
- (9) Gasket
- (10) Spring

- (11) Rear exhaust pipe
- (12) Self-locking nut
- (13) Gasket
- (14) Gasket
- (15) Muffler
- (16) Cushion rubber
- (17) Clamp
- (18) Upper center exhaust pipe cover
- (19) Center exhaust pipe
- (20) Clamp B
- (21) Upper rear catalytic converter cover
- (22) Lower rear catalytic converter cover
- (23) Gasket
- (24) Front oxygen sensor

- (25) Rear oxygen sensor
- (26) Front catalytic converter
- (27) Front catalytic converterLower front catalytic converter cover
- (28) Upper front catalytic converter cover

Tightening torque: N-m (kg-m, ft-lb)

T1: 13±3 (1.3±0.3, 9.4±2.2)

T2: 18±5 (1.8±0.5, 13.0±3.6)


T3: 30±5 (3.1±0.5, 22.4±3.6)

T4: 35±5 (3.6±0.5, 26.0±3.6)

T5: 48±5 (4.9±0.5, 35.4±3.6)

#### **COMPONENT PARTS**

### B: 2500 cc MODEL

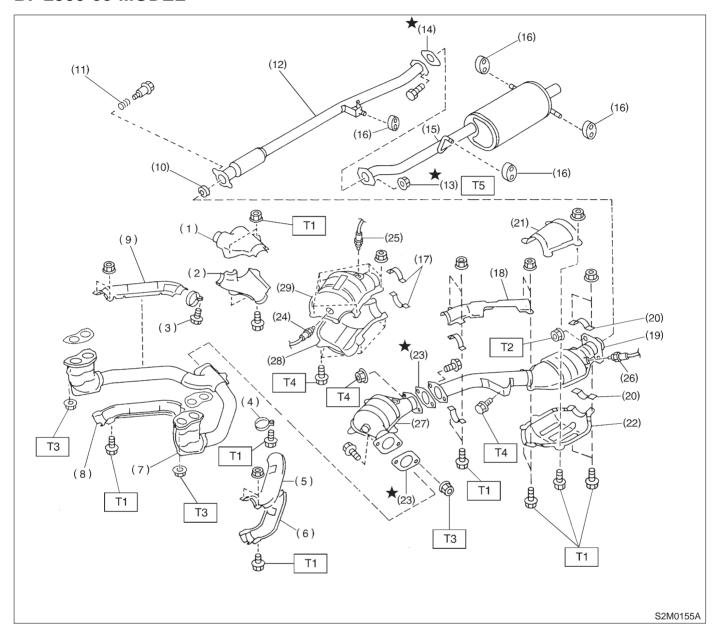

- (1) Upper front exhaust pipe cover CTR
- (2) Lower front exhaust pipe cover CTR
- (3) Band RH
- (4) Band LH
- (5) Upper front exhaust pipe cover LH
- (6) Lower front exhaust pipe cover
- (7) Front exhaust pipe
- (8) Lower front exhaust pipe cover
- (9) Upper front exhaust pipe cover RH
- (10) Gasket
- (11) Spring

- (12) Rear exhaust pipe
- (13) Self-locking nut
- (14) Gasket
- (15) Muffler
- (16) Cushion rubber
- (17) Clamp
- (18) Upper center exhaust pipe cover
- (19) Center exhaust pipe
- (20) Clamp B
- (21) Upper rear catalytic converter cover
- (22) Lower rear catalytic converter cover
- (23) Gasket
- (24) Front oxygen sensor
- (25) Rear oxygen sensor (California spec. vehicles)

- (26) Rear oxygen sensor (Except California spec. vehicles)
- (27) Front catalytic converter
- (28) Lower front catalytic converter cover
- (29) Upper front catalytic converter cover

Tightening torque: N-m (kg-m, ft-lb)

T1: 13±3 (1.3±0.3, 9.4±2.2)

T2: 18±5 (1.8±0.5, 13.0±3.6)

T3: 30±5 (3.1±0.5, 22.4±3.6)

T4: 35±5 (3.6±0.5, 26.0±3.6)

T5: 48±5 (4.9±0.5, 35.4±3.6)