
## 5. Valve Rocker Assembly

• The intake valve rocker arms and the exhaust valve rocker arms are installed on their own rocker shafts both of which are retained by the camshaft caps.

• The valve end of each rocker arm is provided with valve rocker adjusting screw and nut. Turning of this screw adjusts the valve clearance.

• The exhaust valve rocker arms are Y-shaped, and each arm operates two exhaust valves simultaneously.

• Each rocker shaft has an oil passage in it.

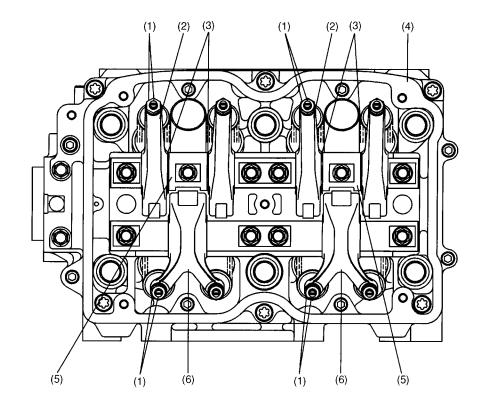

## B2H1986A

- (1) Valve rocker adjusting screw and nut
- (2) Intake valve rocker arm
- (3) Wave washer

- (4) Camshaft cap
- (5) Supporter
- (6) Exhaust valve rocker arm