


## 6. Front Tweeter S901801

### A: REMOVAL S901801A18

- 1) Disconnect ground cable from battery.
- 2) Remove gusset cover.

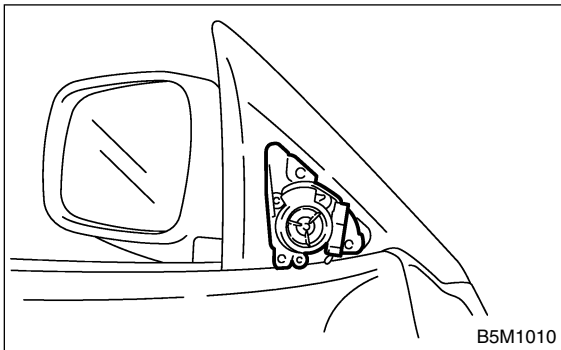

- 3) Disconnect harness connector and remove tweeter.

### B: INSTALLATION S901801A11

Install in the reverse order of removal.