


19. Rear Turn Signal Light Bulb

S914421

A: REMOVAL S914421A18

1. SEDAN S914421A1801


- 1) Open trunk lid and remove cover.

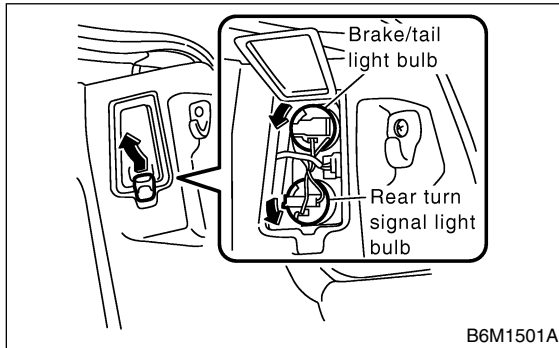

- 2) Turn the socket and remove the bulb.

2. WAGON S914421A1802

- 1) Remove rear combination light assembly. <Ref. to LI-18, WAGON, REMOVAL, Rear Combination Light Assembly.>
- 2) Remove the light cover mounting screws then detach the cover.
- 3) Turn the socket and remove the bulb.

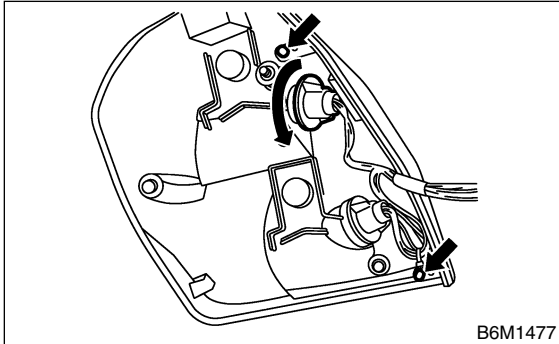

B: INSTALLATION S914421A11

Install in the reverse order of removal.

C: INSPECTION S914421A10

- 1) Visually check the bulb for blow out.
- 2) Check the bulb specification. <Ref. to LI-2, SPECIFICATIONS, General Description.>
- 3) If NG, replace the bulb with a new one.