

1. General Description S144001

A: COMPONENT S144001A05

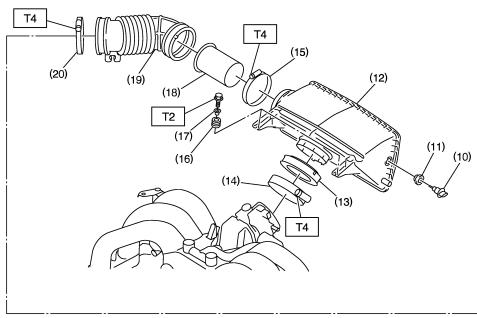

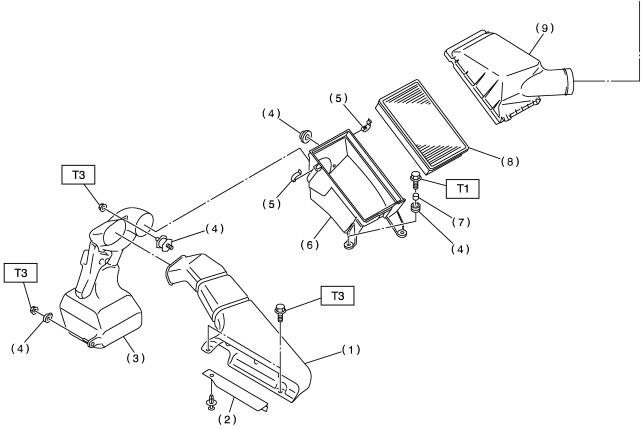

B2M4400A

(1) (2) (3)	Air intake duct Plate Resonator chamber	(10) Intake air temperature sensor(11) Grommet(12) Air intake chamber	(19) Air intake boot (20) Clamp
(4)	Cushion Clip Air cleaner lower case	(13) Grommet (14) Clamp (15) Clamp	Tightening torque: N-m (kgf-m, ft-lb) T1: 32 (3.3, 24) T2: 6.4 (0.65 4.7)
(7) (8) (9)	Spacer Air cleaner element Air cleaner upper cover	(16) Cushion (17) Spacer (18) Intake duct	T3: 7.5 (0.76, 5.5) T4: 3 (0.3, 2.2)

B: CAUTION S144001A03

- Wear working clothing, including a cap, protective goggles, and protective shoes during operation.
- Remove contamination including dirt and corrosion before removal, installation or disassembly.
- Keep the disassembled parts in order and protect them from dust or dirt.
- Before removal, installation or disassembly, be sure to clarify the failure. Avoid unnecessary removal, installation, disassembly, and replacement.
- Be careful not to burn your hands, because each part on the vehicle is hot after running.
- Be sure to tighten fasteners including bolts and nuts to the specified torque.
- Place shop jacks or safety stands at the specified points.
- Before disconnecting electrical connectors of sensor or units, be sure to disconnect ground cable from battery.