

## 19.Rearview Mirror


### A: REMOVAL

#### CAUTION:

Be careful not to damage the mirror surface and windshield glass.

1) Remove the TORX<sup>®</sup> bolt, and then slide the rear view mirror to remove.

**Preparation tool: TORX<sup>®</sup> T20**

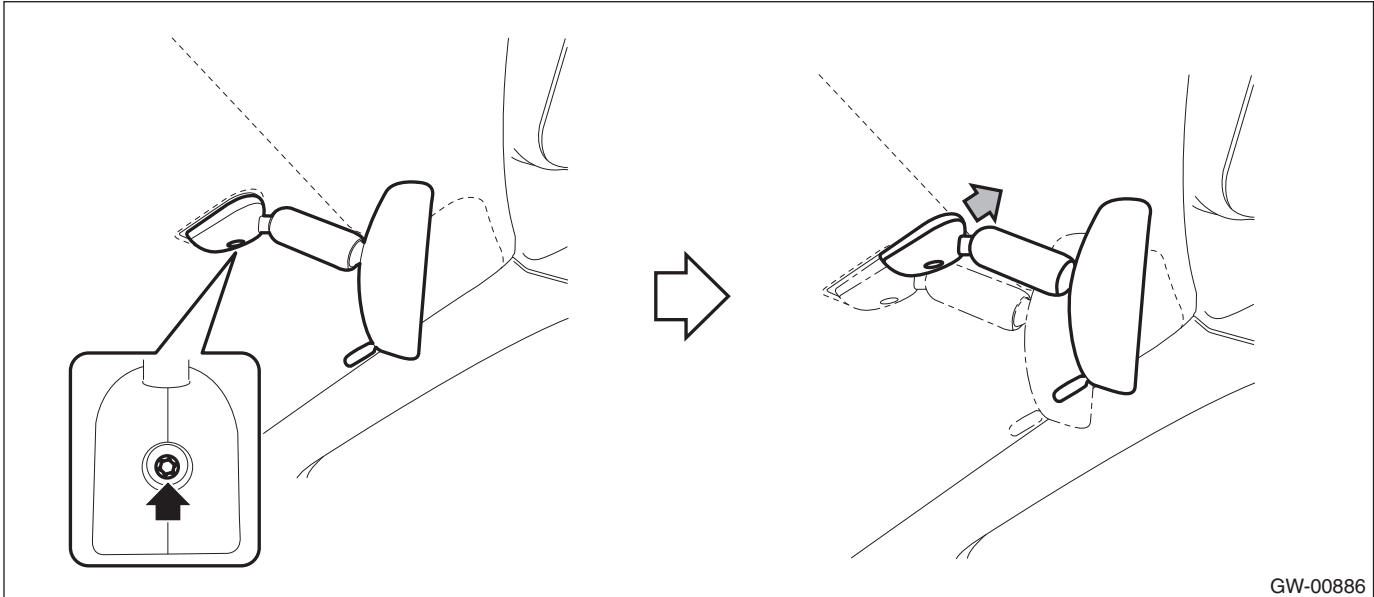

2) When the mirror mount is damaged, use something like piano wire or a spatula to remove.

### B: INSTALLATION

#### CAUTION:

When tightening the mounting TORX<sup>®</sup> screw, be sure to observe the tightening torque. Otherwise, the mount may be damaged in over-torque conditions.

Install each part in the reverse order of removal.

#### Tightening torque:

*Refer to "COMPONENT" of "General Description". <Ref. to GW-6, MIRROR, COMPONENT, General Description.>*

#### NOTE:

If the mirror mount is removed, it is attached according to the following procedures.

1. Remove the old adhesive completely.
2. Attach the mirror mount by matching with the mark on the windshield glass.
3. Make sure that the mirror mount is firmly adhered.

#### Adhesive:

*REPAIR KIT IN MR (Part No. 65029FC000) or equivalent*

### C: INSPECTION

Check the mirror and mirror mount for damage.