


12. Tweeter


A: REMOVAL

1. FRONT

- 1) Disconnect the ground cable from the battery.
- 2) Remove the front door trim. <Ref. to EI-35, REMOVAL, Door Trim.>
- 3) Remove the side deflector duct.

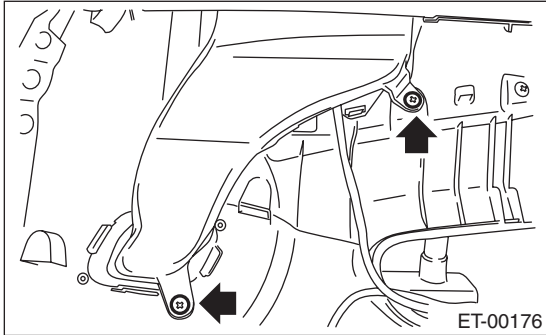


- 4) Remove the tweeter mounting screws.

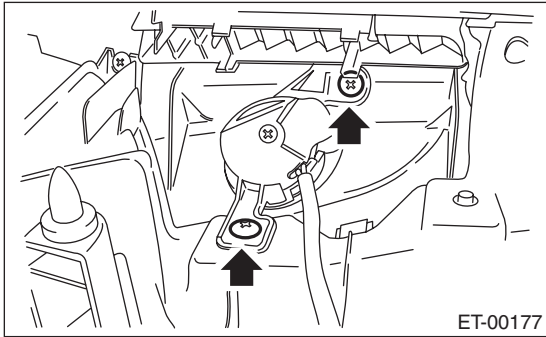

- 5) Remove the tweeter.

2. REAR

- 1) Disconnect the ground cable from the battery.
- 2) Remove the rear quarter trim. <Ref. to EI-45, REMOVAL, Rear Quarter Trim.>
- 3) Disconnect the connector, and then remove the tweeter mounting screws.

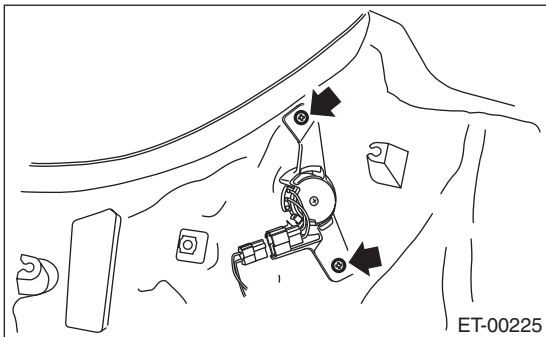

- 4) Remove the tweeter.

B: INSTALLATION

Install in the reverse order of removal.